

# CopperShield Push Pads

## HYGIENIC DOOR ACTIVATION



### DURABLE & ATTRACTIVE ANTIMICROBIAL COPPER PUSH PADS

Antimicrobial Automatic Door Activation Switch, designed to kill 99.9% of disease causing bacteria, including MRSA and E. coli

- **Applications**

Hygienic automatic door activation for hospitals, clean-rooms, pharmaceutical industry, or indeed any environment where hygiene and convenience are a requirement

- **Wireless for Ease of Installation**


Available in hardwired or wireless versions (433MHz)

- **Durable**

Tested to in excess of 10 million activation cycles our range of switches offer low maintenance combined with elegance

- **Available in Two Sizes**

6" (152mm) Square  
4.5" (115mm) Square

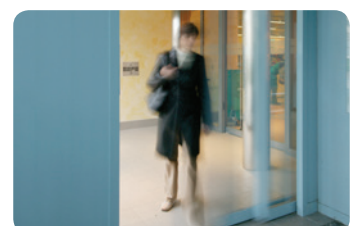

**ACCESSORIES**



4UFK  
Recess mounting kit for  
C4S1U0 and C4S1U4

**TECHNICAL SPECIFICATIONS**

SIZE:	4 1/2" (115mm) SQUARE	6" (152mm) SQUARE
EPA Approved GLP Test Protocols	Efficacy as a Sanitizer, Residual Self-Sanitizing Activity, Continuous Reduction of Bacterial Contaminants	
Bacteria	E. coli 0157:H7, Methicillin-Resistant Staphylococcus aureus (MRSA), Staphylococcus aureus, Vancomycin-Resistant Enterococcus faecalis (VRE), Enterobacter aerogenes, Pseudomonas aeruginosa	
Material / Finish	18-gauge copper ally / brushed	
Electrical / Power	12 - 24 VAC/VDC - Hardwired, 9 VDC (Battery) - Wireless Transmitter	
Operating Temperature	-40°C to +60°C	
Dimensions (WxHxD)	4 1/2" x 4 1/2" x 1 1/2" (115 x 115 x 38mm)	6" x 6" x 1 1/2" (152 x 152 x 38mm)
Engraving	Handicap Logo / Press to Open	
Mounting Options	Directly into Electrical Box or Universal Mounting Boxes	
Operating Options	Hardwired or Wireless Transmitter (433 MHz available)	
Wireless Signal Range	Up to 100 feet (30m) with Ultra Small Transmitters	
Activation Switch Type	(1) NO or NC	
Part Numbers	C4S1 (call Hotron for options)	C6S1 (call Hotron for options)

**RANGE AVAILABLE**



C4S1  
Hardwired, Copper 4 1/2" (115mm) Square



C4S1U0  
Hardwired Copper 4 1/2" (115mm) Square  
w/Universal Box



C4S1U4  
Wireless Copper 4 1/2" (115mm) Square w/  
Universal Box and 433 MHz transmitter




C6S1  
Hardwired Copper 6" (152mm) Square




C6S1U0  
Hardwired Copper 6" (152mm) Square w/  
Universal Box



C6S1U4  
Wireless Copper 6" (152mm) Square w/  
Universal Box and 433 MHz Transmitter

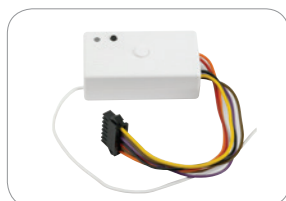

433MHz-RX  
Ultra-small 433MHz receiver

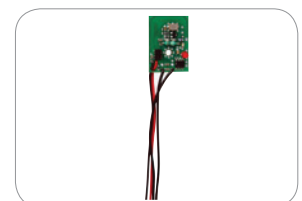

433MHz-TX  
Ultra-small 433MHz replacement  
transmitter



**Axis Automatic Entrance Systems Ltd**

Unit 6, Queens Park Industrial Estate, Studland Road,  
Northampton, NN2 6NA.

Tel: 01604 212500 · Fax 01604 212495

Email: sales@axisautomatic.com

www.axisautomatic.com