


Hooped Perimeter Barrier 76mm Diameter Galvanised, Bolt Down



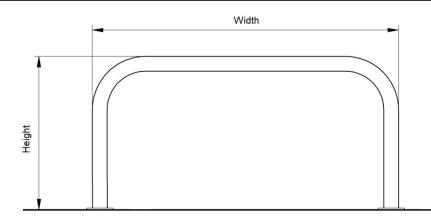

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 177 636	500 x 750 Galvanised - Bolt Down	10kg
138 177 630	500 x 1000 Galvanised - Bolt Down	12kg
138 177 634	500 x 1500 Galvanised - Bolt Down	14kg
138 177 638	500 x 2000 Galvanised - Bolt Down	17kg
138 177 616	750 x 1000 Galvanised - Bolt Down	14kg
138 177 621	750 x 1500 Galvanised - Bolt Down	17kg
138 177 626	750 x 2000 Galvanised - Bolt Down	20kg
138 177 605	1000 x 1000 Galvanised - Bolt Down	17kg
138 177 601	1000 x 1500 Galvanised - Bolt Down	20kg
138 177 610	1000 x 2000 Galvanised - Bolt Down	23kg

Product details

- 3mm wall thickness
- 6 bolts required per barrier
- Round flange plate 180mm x 5mm

Colour coated options available extra

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

