


## Hooped Perimeter Barrier 76mm Diameter Stainless Steel, Removable



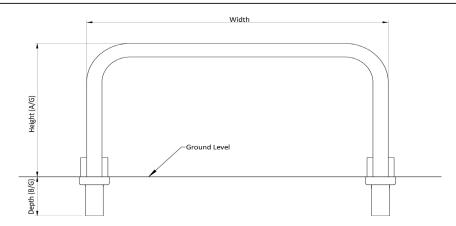

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Galvanised, Stainless steel, galvanised and colour coated available.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 205 341R	500 x 750 Stainless Steel Grade 304 - Removable	15kg
138 205 339R	500 x 1000 Stainless Steel Grade 304 - Removable	15kg
138 205 335R	500 x 1500 Stainless Steel Grade 304 - Removable	17kg
138 205 331R	500 x 2000 Stainless Steel Grade 304 - Removable	19kg
138 205 324R	750 x 1000 Stainless Steel Grade 304 - Removable	17kg
138 205 321	750 x 1500 Stainless Steel Grade 304 - Removable	19kg
138 205 316R	750 x 2000 Stainless Steel Grade 304 - Removable	21kg
138 205 309R	1000 x 1000 Stainless Steel Grade 304 - Removable	19kg
138 205 305R	1000 x 1500 Stainless Steel Grade 304 - Removable	21kg
138 205 301R	1000 x 2000 Stainless Steel Grade 304 - Removable	23kg

## **Product details**

- · 2mm wall thickness
- · Removable, secured with padlock (optional extra)
- Brushed finish

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).





