




GFC 2000 1000mm Galvanised or Galvanised & Colour

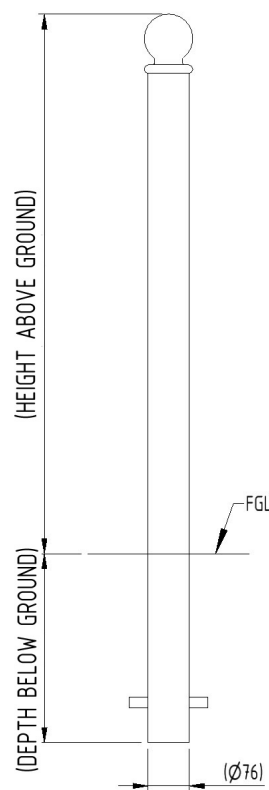

Functional yet striking, the GFC 2000 bollard is manufactured from mild steel and galvanised for longevity. A spherical cap is welded on to the bollard to complete the design. This bollard is ideal for providing an aesthetic solution to unauthorised parking and access.

The GFC 2000 is available in a galvanised and galvanised and coated finish. RAL numbers must be specified at time of order.

Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.

Part Number	Description	Lift Weight (kg)	Weight (kg)
138 120 111	Galvanised - Concrete In		9kg
138 120 112	Galvanised & Black - Concrete In		9kg
138 120 113	Galvanised & Colour - Concrete In		9kg
138 120 114	Galvanised - Bolt Down		9kg
138 120 115	Galvanised & Black - Bolt Down		9kg
138 120 116	Galvanised & Colour - Bolt Down		9kg
138 120 117	Galvanised - Removable	9kg	13kg
138 120 119	Galvanised & Black - Removable	9kg	13kg
138 120 118	Galvanised & Colour - Removable	9kg	13kg

Product details

- 1000mm height above ground
- 76mm diameter
- 3mm wall thickness
- Concrete in 400mm (below ground)
- Price excludes fixing down bolts and padlock to secure
- Socket - 220mm (below ground)

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

