



Fixed Height Restrictor with Swing Gate 3m, 4m, 5m, 6m and 7m Galvanised and Colour

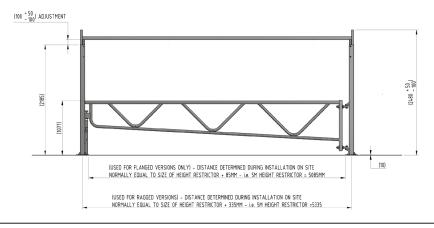



The AUTOPA Fixed Height Restrictor with Swing Gate has a standard clearance of 2.05m, limiting access to high sided vehicles and is perfect for controlling access at retail park entrances.

Manufactured from galvanised mild steel, the system is coated red as standard (other colours are available upon request; please state BS/RAL numbers at time of order). The gate can both be locked in the open and closed positions with an additional catch post and padlocks (available separately). The AUTOPA Fixed Height Restrictor is available ragged or flanged, and as an optional extra can also be fitted with a knocking bar and/or a maximum height warning sign.



Shown with optional knock bar

Knock bars to suit the barrier can be supplied at an extra cost.

The standard clearance is 2.05m including knock bar, 2.2m excluding knock bar.

Part Number	<u>Description</u>
138 106 536	3m Galvanised & Colour - Bolt Down
138 106 537	3m Galvanised & Colour - Concrete In
138 106 546	4m Galvanised & Colour - Bolt Down
138 106 547	4m Galvanised & Colour - Concrete In
138 106 556	5m Galvanised & Colour - Bolt Down
138 106 557	5m Galvanised & Colour - Concrete In
138 106 566	6m Galvanised & Colour - Bolt Down
138 106 567	6m Galvanised & Colour - Concrete In
138 106 576	7m Galvanised & Colour - Bolt Down
138 106 577	7m Galvanised & Colour - Concrete In

Product details

- Standard Clearance: 2.2m (without a knock bar)
- Standard Clearance: 2.05m (with a knock bar) Optional Extra
- Main Body: 120mm x 120mm square tube

- Main Gate Arm: 60mm x 60mm square tube
- 3mm wall thickness
- Concrete in 600mm (below ground)

Installation & use

Bolt down Height Restrictors require bolting down to a suitable concrete surface (no less than 600mm3) by means of four M16 bolts per leg.

Concrete in Height Restrictors require an excavated hole (no less than 600mm3) for installation.

It is recommended that suitable signs are installed to ensure vehicles are aware of the obstruction.

This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

