


**timloc**  
building products

# CIVILS AND GROUNDWORKS

**Sustainable building products** to suit groundwork requirements

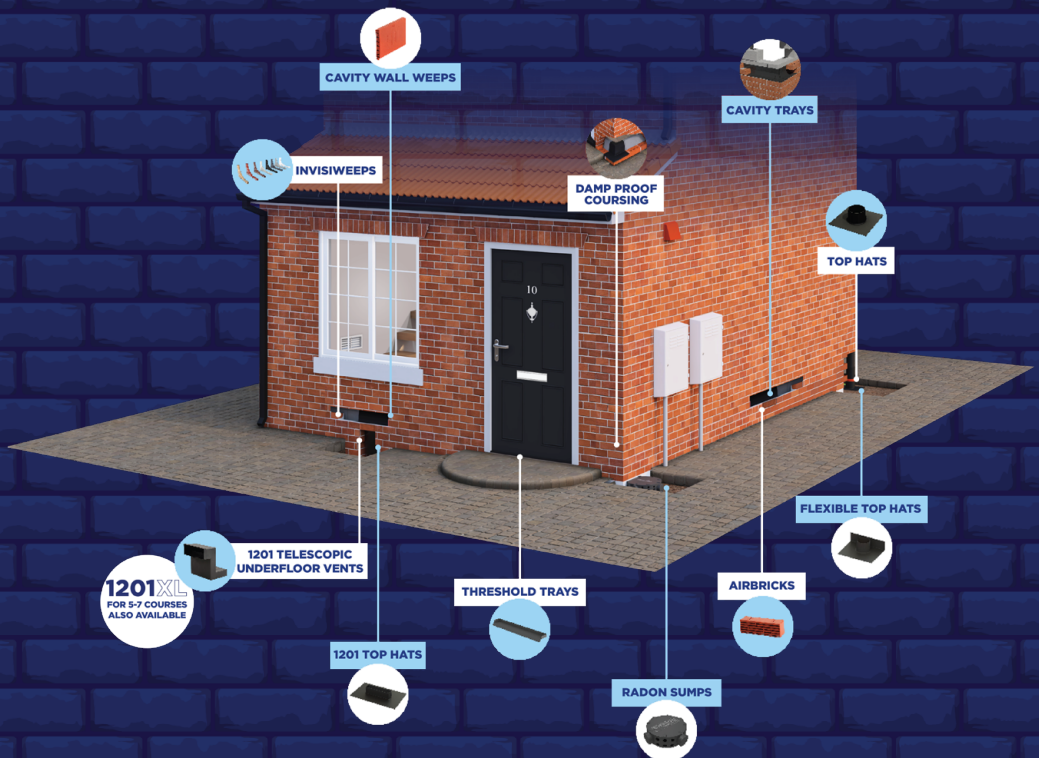

# NEXT DAY DELIVERY

**ON ALL ORDERS PLACED BEFORE 12PM**

All orders placed before 12pm Monday - Friday will be delivered the next working day. Applicable to standard stock items only, please see individual product pages for more information.

**LOW CARRIAGE PAID ORDER VALUES**



**£100  
TO BRANCH**

**£150  
TO SITE**

# CONTENTS

## Telescopic Underfloor Ventilation

1201 Telescopic Underfloor Vent 3-5 Courses	4
1201XL Telescopic Underfloor Vent 5-7 Courses	4
1201XL+ Telescopic Underfloor Vent 5-7 Courses (150mm+ cavity)	4
1201 Plastic Airbrick	4
1201 Telescopic Underfloor Vent Accessories	5

## Wall Weeps

Invisiweep NC Non-Combustible Wall Weep	6
Invisiweep Wall Weep	6
1143 Cavity Wall Weep Vent	6

## Top Hats & Accessories

Top Hats	7
Flexible Top Hats	7
Telescopic Vent Top Hats	7
Accessories	7

## Gas Barrier & Damp Proof Membrane

Radon Sump	8
Threshold Internal Protection Tray	8
Perimeter Cavity Trays	8
Corner Cavity Trays	9
Stop Ends	9
Change of Level Units	9

## Damp Proof Coursing Accessories

Stop Ends	10
Universal 90° Unit	10
Joint Support Units	11
Change of Level Units	11

# TELESCOPIC UNDERFLOOR VENTILATORS



## 1201 TELESCOPIC UNDERFLOOR VENTILATOR



Adjustable ventilator for suspended ground floors up to 5 brick courses.

Product Code	Coursing Height	Pack Qty	Lead Time
1201	3-5 courses	20	Next Working Day

## 1201XL TELESCOPIC UNDERFLOOR VENTILATOR

Adjustable ventilator for suspended ground floors between 5-7 brick courses.

Product Code	Coursing Height	Pack Qty	Lead Time
1201XL	5-7 courses	10	Next Working Day



## 1201XL+ TELESCOPIC UNDERFLOOR VENTILATOR


Adjustable ventilator for suspended ground floors between 5-7 brick courses. Suited for 150mm+ cavity width construction. Also compatible down to 50mm clear cavity width.

Product Code	Coursing Height	Pack Qty	Lead Time
1201XLPLUS	5-7 courses	10	Next Working Day

## 1201AB PLASTIC AIRBRICK


Airbrick ventilator for use with cavity sleeves and the 1201, 1201XL and 1201XL+ telescopic underfloor ventilators.

Product Code	Colour	Pack Qty	Lead Time
1201ABBB	Blue Black	20	Next Working Day
1201ABBL	Black	20	Next Working Day
1201ABBR	Brown	20	Next Working Day
1201ABBU	Buff	20	Next Working Day
1201ABGR	Grey	20	Next Working Day
1201ABTE	Terracotta	20	Next Working Day
1201ABWH	White	20	Next Working Day




# TYPICAL DETAIL


Section drawing of a typical wall detail.

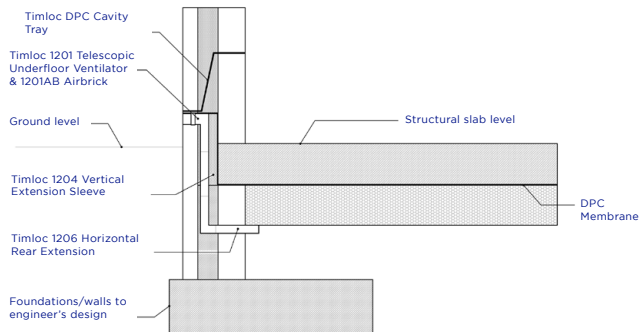

## 1201 EXTENSION ACCESSORIES

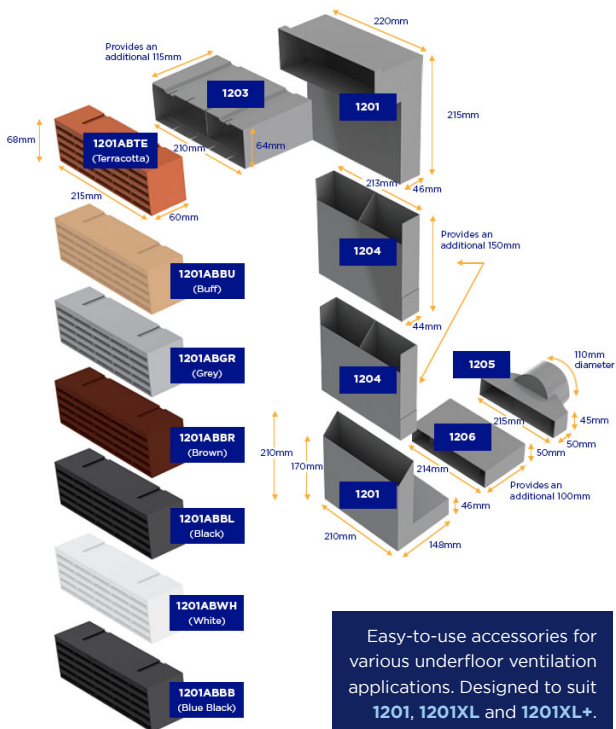


Easy-to-use accessories for various underfloor ventilation applications. Designed to suit 1201, 1201XL and 1201XL+.



1203 HORIZONTAL FRONT EXTENSION



1204 VERTICAL FRONT EXTENSION




1205 DUCT ADAPTER



1206 HORIZONTAL REAR EXTENSION

Product Code	Description	To Suit	Pack Qty	Lead Time
1203	Horizontal front extension	+115mm	20	Next Working Day
1204	Vertical extension sleeve	Additional 2 brick courses	20	Next Working Day
1205	Duct adaptor	Suits 110mm diameter duct	1	Next Working Day
1206	Horizontal rear extension	+100mm	1	Next Working Day

# WALL WEEPS



## INVISIWEEP NC WALL WEEP

A1 non-combustible wall weep suitable for use in:

- High rise buildings above 18 metres as Regulation 7 (2) & Building Regulation approved document B.
- High rise buildings above 11 metres as Building (Scotland) technical handbook 2019: domestic & non-domestic.

Product Code	Pack Qty	Lead Time
ZIN50	50	Next Working Day


## INVISIWEEP WALL WEEP

Wall weep for discharging water from external walls. Extension tube available for wide walls and render (IW500EX)(+500mm).

Product Code	Colour	Pack Qty	Lead Time
IW50BB	Blue Black	50	Next Working Day
IW50BL	Black	50	Next Working Day
IW50BR	Brown	50	Next Working Day
IW50BU	Buff	50	Next Working Day
IW50CL	Clear	50	Next Working Day
IW50GR	Grey	50	Next Working Day
IW50TE	Terracotta	50	Next Working Day
IW50WH	White	50	Next Working Day
IW500EX	Natural	10	Next Working Day

Also available in pack quantities of 200. Use code **IW200** and state required colour:

**BB:** Blue Black, **BL:** Black, **BR:** Brown, **BU:** Buff, **CL:** Clear, **GR:** Grey, **TE:** Terracotta & **WH:** White




## 1143 CAVITY WALL WEEP VENT

Multi-function 1143 cavity wall weep designed for cavity ventilation and reliable discharge of water from inside cavity walls. Individual extension pieces (1144) can be clipped together to create a longer extension (+50mm).

Product Code	Colour	Pack Qty	Lead Time
1143BB	Blue Black	50	Next Working Day
1143BL	Black	50	Next Working Day
1143BR	Brown	50	Next Working Day
1143BU	Buff	50	Next Working Day
1143CL	Clear	50	Next Working Day
1143GR	Grey	50	Next Working Day
1143TE	Terracotta	50	Next Working Day
1143WH	White	50	Next Working Day
1144	Natural	50	Next Working Day



# TOP HATS & ACCESSORIES



## TOP HATS



For sealing to a gas barrier and at the intersection of pipe projections. Available in sizes 55mm to 160mm.

Product Code	Pack Quantity	Lead Time
TH055	1	3-5 Working Days
TH082	1	3-5 Working Days
TH110	1	Next Working Day
TH135	1	3-5 Working Days
TH160	1	3-5 Working Days

## FLEXIBLE TOP HATS

Flexible enough to fit around difficult applications and are ideal for use in tight situations where a pipe is close to a wall. Available in sizes 110mm and 135mm.

Product Code	Pack Quantity	Lead Time
77110	1	Next Working Day
77135	1	Next Working Day

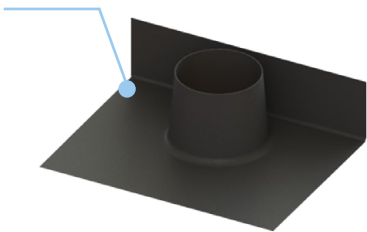

## TELESCOPIC VENT TOP HAT

For sealing telescopic underfloor vent where gas protection is required. Designed for use with 1201, 1201XL and 1201XL+.

Product Code	Pack Quantity	Lead Time
77120	1	Next Working Day

## TOP HAT ACCESSORIES

Range of accessories for use with top hats and gas barrier and damp proof membrane cavity tray systems.


Product Code	Pack Qty	To Suit	Lead Time
JCLIP5	1	TH055	Next Working Day
JCLIP6	1	TH082 & TH110	Next Working Day
JCLIP7	1	TH135 & TH160	Next Working Day
GTAPE01	1	Various	Next Working Day
GTAPE02	1	Various	Next Working Day



JCLIP6

# GAS BARRIER & DAMP PROOF MEMBRANES

## CAVITY TRAY SYSTEMS & ACCESSORIES



### RADON SUMP



Prefabricated sumps are required when a sub floor depressurisation is required under full radon protection. The sump is installed beneath the floor slab in non suspended floor applications and vented to atmosphere via a connecting 110mm drainage pipe to an external source and capped off with proprietary products i.e. airbrick & telescopic under floor vent.

Product Code	Pack Qty	Lead Time
RSUMP01	1	Next Working Day

### THRESHOLD INTERNAL PROTECTION TRAY

For detailing rebated areas inside door threshold to maintain water and gas tight integrity without having to trim membrane to fit.

Product Code	Lead Time
Made to order - Please contact Technical	3-5 Working Days



### PERIMETER CAVITY TRAYS


To be installed continuously around the external perimeter of a building to allow the membrane to be laid at a later stage and so prevent damage as building work proceeds. Supplied in 2.5m lengths.

Product Description	Lead Time	50mm Code	75mm Code	100mm Code
Perimeter Cavity Tray 150mm Rise	3-5 Working Days	5101	5102	5103
Perimeter Cavity Tray 225mm Rise	3-5 Working Days	5104	5105	5106



## CORNER CAVITY TRAYS

Product Description	Lead Time	Product Codes		
		50mm	75mm	100mm
External 90° Corner Tray 150mm Rise	3-5 Working Days	5110	5112	5114
Internal 90° Corner Tray 150mm Rise	3-5 Working Days	5111	5113	5115
External 90° Corner Tray 225mm Rise	3-5 Working Days	5116	5118	5120
Internal 90° Corner Tray 225mm Rise	3-5 Working Days	5117	5119	5121



Manufactured from heavy duty 2mm polyethylene.




Suitable for breaks in the natural run of the cavity tray system. Manufactured from heavy duty 2mm PP.

## STOP ENDS

Product Description	Lead Time	Product Codes		
		50mm	75mm	100mm
Stop End Right Hand 150mm Rise	3-5 Working Days	5130	5132	5134
Stop End Left Hand 150mm Rise	3-5 Working Days	5131	5133	5135
Stop End Right Hand 225mm Rise	3-5 Working Days	5136	5138	5140
Stop End Left Hand 225mm Rise	3-5 Working Days	5137	5139	5141

## CHANGE OF LEVEL UNITS

Product Description	Lead Time	Product Codes		
		50mm	75mm	100mm
Change of Level 75mm Step 150mm Rise	3-5 Working Days	9060	9063	9066
Change of Level 150mm Step 150mm Rise	3-5 Working Days	9061	9064	9067
Change of Level 225mm Step 150mm Rise	3-5 Working Days	9062	9065	9068
Change of Level 75mm Step 225mm Rise	3-5 Working Days	9070	9073	9076
Change of Level 150mm Step 225mm Rise	3-5 Working Days	9071	9074	9077
Change of Level 225mm Step 225mm Rise	3-5 Working Days	9072	9075	9078



Suitable for breaks in the natural run of the cavity tray system. Available in cavity size and rise options with 75, 150 and 225mm steps. Manufactured from heavy duty 2mm PP.

# DAMP PROOF COURSING ACCESSORIES



## STOP ENDS

For sealing off the ends of the cavity tray at its start and finish.


Product Description	Lead Time	Product Codes		
		50mm	75mm	100mm
Stop End Unit RH - Full Height 150mm Rise	3-5 Working Days	9010	9012	9014
Stop End Unit LH - Full Height 150mm Rise	3-5 Working Days	9011	9013	9015
Stop End Unit RH - 75mm Height (Sloping) 150mm Rise	3-5 Working Days	9045	9047	9049
Stop End Unit LH - 75mm Height (Sloping) 150mm Rise	3-5 Working Days	9046	9048	9050
Stop End Unit Multi - 75mm Height 150mm Rise	3-5 Working Days	9024	9024	9024
Stop End Unit RH - Full Height 225mm Rise	3-5 Working Days	9018	9020	9022
Stop End Unit LH - Full Height 225mm Rise	3-5 Working Days	9019	9021	9023
Stop End Unit RH - 75mm Height (Sloping) 225mm Rise	3-5 Working Days	9051	9053	9055
Stop End Unit LH - 75mm Height (Sloping) 225mm Rise	3-5 Working Days	9052	9054	9056
Stop End Unit Multi - 75mm Height 225mm Rise	3-5 Working Days	9024	9024	9024

## UNIVERSAL 90° CORNER UNIT

For use where a cavity tray must turn the corner of a building.

Product Description	Lead Time	Product Codes		
		50mm	75mm	100mm
Corner Unit 150mm Rise	3-5 Working Days	9001	9002	9003
Corner Unit 225mm Rise	3-5 Working Days	9004	9005	9006






## JOINT SUPPORTS

For fitting below lapped joints in the DPC to provide support and allow the jointing tape to be sealed correctly.

Product Description	Lead Time	Product Codes		
		50mm	75mm	100mm
Joint Supports 150mm Rise	3-5 Working Days	9026	9027	9028
Joint Supports 225mm Rise	3-5 Working Days	9030	9031	9032

## CHANGE OF LEVEL UNITS

Product Description	Lead Time	Product Codes		
		50mm	75mm	100mm
Change of Level 75mm Step 150mm Rise	3-5 Working Days	9060	9063	9066
Change of Level 150mm Step 150mm Rise	3-5 Working Days	9061	9064	9067
Change of Level 225mm Step 150mm Rise	3-5 Working Days	9062	9065	9068
Change of Level 75mm Step 225mm Rise	3-5 Working Days	9070	9073	9076
Change of Level 150mm Step 225mm Rise	3-5 Working Days	9071	9074	9077
Change of Level 225mm Step 225mm Rise	3-5 Working Days	9072	9075	9078




For use where the cavity tray steps up or down along its run.



**EVERYTHING**  
*UNDER ONE ROOF*

**SCAN THE QR CODE**  
TO DISCOVER THE FULL  
PRODUCT RANGE



# Product Codes

Product Code	Description	Pack Qty	Lead Time	Page
1201	Telescopic Underfloor Vent 3-5 Courses	20	Next Working Day	4
1201XL	Telescopic Underfloor Vent 5-7 Courses	10	Next Working Day	4
1201XLPLUS	Telescopic Underfloor Vent 5-7 Courses (150mm+ cavity)	10	Next Working Day	4
1201ABBB	1201AB Plastic Airbrick - Blue Black	20	Next Working Day	4
1201ABBL	1201AB Plastic Airbrick - Black	20	Next Working Day	4
1201ABBR	1201AB Plastic Airbrick - Brown	20	Next Working Day	4
1201ABBU	1201AB Plastic Airbrick - Buff	20	Next Working Day	4
1201ABGR	1201AB Plastic Airbrick - Grey	20	Next Working Day	4
1201ABTE	1201AB Plastic Airbrick - Terracotta	20	Next Working Day	4
1201ABWH	1201AB Plastic Airbrick - White	20	Next Working Day	4
1203	Horizontal Front Extension	20	Next Working Day	5
1204	Vertical Extension Sleeve	20	Next Working Day	5
1205	Duct Adapter	1	Next Working Day	5
1206	Horizontal Rear Extension	1	Next Working Day	5
ZIN50	Invisiweep NC Non-Combustible Wall Weep	50	Next Working Day	6
IW50BB	Invisiweep Wall Weep - Blue Black	50	Next Working Day	6
IW50BL	Invisiweep Wall Weep - Black	50	Next Working Day	6
IW50BR	Invisiweep Wall Weep - Brown	50	Next Working Day	6
IW50BU	Invisiweep Wall Weep - Buff	50	Next Working Day	6
IW50CL	Invisiweep Wall Weep - Clear	50	Next Working Day	6
IW50GR	Invisiweep Wall Weep - Grey	50	Next Working Day	6
IW50TE	Invisiweep Wall Weep - Terracotta	50	Next Working Day	6
IW50WH	Invisiweep Wall Weep - White	50	Next Working Day	6
IW200BB	Invisiweep Wall Weep - Blue Black	200	Next Working Day	6
IW200BL	Invisiweep Wall Weep - Black	200	Next Working Day	6
IW200BR	Invisiweep Wall Weep - Brown	200	Next Working Day	6
IW200BU	Invisiweep Wall Weep - Buff	200	Next Working Day	6
IW200CL	Invisiweep Wall Weep - Clear	200	Next Working Day	6
IW200GR	Invisiweep Wall Weep - Grey	200	Next Working Day	6
IW200TE	Invisiweep Wall Weep - Terracotta	200	Next Working Day	6
IW200WH	Invisiweep Wall Weep - White	200	Next Working Day	6
IW500EX	Invisiweep Extension +500mm	10	Next Working Day	6
1143BB	Cavity Wall Weep - Blue Black	50	Next Working Day	6
1143BL	Cavity Wall Weep - Black	50	Next Working Day	6
1143BR	Cavity Wall Weep - Brown	50	Next Working Day	6
1143BU	Cavity Wall Weep - Buff	50	Next Working Day	6
1143CL	Cavity Wall Weep - Clear	50	Next Working Day	6
1143GR	Cavity Wall Weep - Grey	50	Next Working Day	6
1143TE	Cavity Wall Weep - Terracotta	50	Next Working Day	6
1143WH	Cavity Wall Weep - White	50	Next Working Day	6
1144	Cavity Wall Weep Extension	50	Next Working Day	6
TH055	Rigid Top Hat - 55mm Diameter	1	3-5 Working Days	7
TH082	Rigid Top Hat - 82mm Diameter	1	3-5 Working Days	7
TH110	Rigid Top Hat - 110mm Diameter	1	Next Working Day	7
TH135	Rigid Top Hat - 135mm Diameter	1	3-5 Working Days	7
TH160	Rigid Top Hat - 160mm Diameter	1	3-5 Working Days	7
77110	Flexible Top Hat - 110mm Diameter	1	Next Working Day	7
77135	Flexible Top Hat - 135mm Diameter	1	Next Working Day	7
77120	Rigid Top Hat for 1201	1	Next Working Day	7

Product Code	Description	Pack Qty	Lead Time	Page
JCLIP5	Jubilee Clip for TH055 & TH082	1	Next Working Day	7
JCLIP6	Jubilee Clip for TH110	1	Next Working Day	7
JCLIP7	Jubilee Clip for TH135 & TH160	1	Next Working Day	7
GTAPE01	Gastite Sealing Tape 15m x 100mm	1	Next Working Day	7
GTAPE02	Plastic Girth Tape 75m x 50mm	1	Next Working Day	7
RSUMP01	Radon Sump	1	Next Working Day	8
5101	Perimeter Cavity Tray 150mm Rise 50mm Width	1	3-5 Working Days	8
5102	Perimeter Cavity Tray 150mm Rise 75mm Width	1	3-5 Working Days	8
5103	Perimeter Cavity Tray 150mm Rise 100mm Width	1	3-5 Working Days	8
5104	Perimeter Cavity Tray 225mm Rise 50mm Width	1	3-5 Working Days	8
5105	Perimeter Cavity Tray 225mm Rise 75mm Width	1	3-5 Working Days	8
5106	Perimeter Cavity Tray 225mm Rise 100mm Width	1	3-5 Working Days	8
5110	External 90° Corner Tray 150mm Rise 50mm Width	1	3-5 Working Days	9
5112	External 90° Corner Tray 150mm Rise 75mm Width	1	3-5 Working Days	9
5114	External 90° Corner Tray 150mm Rise 100mm Width	1	3-5 Working Days	9
5111	Internal 90° Corner Tray 150mm Rise 50mm Width	1	3-5 Working Days	9
5113	Internal 90° Corner Tray 150mm Rise 75mm Width	1	3-5 Working Days	9
5115	Internal 90° Corner Tray 150mm Rise 100mm Width	1	3-5 Working Days	9
5116	External 90° Corner Tray 225mm Rise 50mm Width	1	3-5 Working Days	9
5118	External 90° Corner Tray 225mm Rise 75mm Width	1	3-5 Working Days	9
5120	External 90° Corner Tray 225mm Rise 100mm Width	1	3-5 Working Days	9
5117	Internal 90° Corner Tray 225mm Rise 50mm Width	1	3-5 Working Days	9
5119	Internal 90° Corner Tray 225mm Rise 75mm Width	1	3-5 Working Days	9
5121	Internal 90° Corner Tray 225mm Rise 100mm Width	1	3-5 Working Days	9
5130	Stop End Right Hand 150mm Rise 50mm Width	1	3-5 Working Days	9
5132	Stop End Right Hand 150mm Rise 75mm Width	1	3-5 Working Days	9
5134	Stop End Right Hand 150mm Rise 100mm Width	1	3-5 Working Days	9
5131	Stop End Left Hand 150mm Rise 50mm Width	1	3-5 Working Days	9
5133	Stop End Left Hand 150mm Rise 75mm Width	1	3-5 Working Days	9
5135	Stop End Left Hand 150mm Rise 100mm Width	1	3-5 Working Days	9
5136	Stop End Right Hand 225mm Rise 50mm Width	1	3-5 Working Days	9
5138	Stop End Right Hand 225mm Rise 75mm Width	1	3-5 Working Days	9
5140	Stop End Right Hand 225mm Rise 100mm Width	1	3-5 Working Days	9
5137	Stop End Left Hand 225mm Rise 50mm Width	1	3-5 Working Days	9
5139	Stop End Left Hand 225mm Rise 75mm Width	1	3-5 Working Days	9
5141	Stop End Left Hand 225mm Rise 100mm Width	1	3-5 Working Days	9
9060	Change of Level 75mm 150mm Rise 50mm Width	1	3-5 Working Days	9 + 11
9063	Change of Level 75mm 150mm Rise 75mm Width	1	3-5 Working Days	9 + 11
9066	Change of Level 75mm 150mm Rise 100mm Width	1	3-5 Working Days	9 + 11
9061	Change of Level 150mm 150mm Rise 50mm Width	1	3-5 Working Days	9 + 11
9064	Change of Level 150mm 150mm Rise 75mm Width	1	3-5 Working Days	9 + 11
9067	Change of Level 150mm 150mm Rise 100mm Width	1	3-5 Working Days	9 + 11
9062	Change of Level 225mm 150mm Rise 50mm Width	1	3-5 Working Days	9 + 11
9065	Change of Level 225mm 150mm Rise 75mm Width	1	3-5 Working Days	9 + 11
9068	Change of Level 225mm 150mm Rise 100mm Width	1	3-5 Working Days	9 + 11
9070	Change of Level 75mm 225mm Rise 50mm Width	1	3-5 Working Days	9 + 11
9073	Change of Level 75mm 225mm Rise 75mm Width	1	3-5 Working Days	9 + 11
9076	Change of Level 75mm 225mm Rise 100mm Width	1	3-5 Working Days	9 + 11
9071	Change of Level 150mm 225mm Rise 50mm Width	1	3-5 Working Days	9 + 11
9074	Change of Level 150mm 225mm Rise 75mm Width	1	3-5 Working Days	9 + 11
9077	Change of Level 150mm 225mm Rise 100mm Width	1	3-5 Working Days	9 + 11
9072	Change of Level 225mm 225mm Rise 50mm Width	1	3-5 Working Days	9 + 11
9075	Change of Level 225mm 225mm Rise 75mm Width	1	3-5 Working Days	9 + 11
9078	Change of Level 225mm 225mm Rise 100mm Width	1	3-5 Working Days	9 + 11

Product Code	Description	Pack Qty	Lead Time	Page
9010	Stop End Unit RH - Full Height 150mm Rise 50mm Width	1	3-5 Working Days	10
9012	Stop End Unit LH - Full Height 150mm Rise 50mm Width	1	3-5 Working Days	10
9014	Stop End Unit RH - Full Height 150mm Rise 75mm Width	1	3-5 Working Days	10
9011	Stop End Unit LH - Full Height 150mm Rise 75mm Width	1	3-5 Working Days	10
9013	Stop End Unit RH - Full Height 150mm Rise 100mm Width	1	3-5 Working Days	10
9015	Stop End Unit LH - Full Height 150mm Rise 100mm Width	1	3-5 Working Days	10
9045	Stop End Unit RH - 75mm Height (Sloping) 150mm Rise 50mm Width	1	3-5 Working Days	10
9047	Stop End Unit RH - 75mm Height (Sloping) 150mm Rise 75mm Width	1	3-5 Working Days	10
9049	Stop End Unit RH - 75mm Height (Sloping) 150mm Rise 100mm Width	1	3-5 Working Days	10
9046	Stop End Unit LH - 75mm Height (Sloping) 150mm Rise 50mm Width	1	3-5 Working Days	10
9048	Stop End Unit LH - 75mm Height (Sloping) 150mm Rise 75mm Width	1	3-5 Working Days	10
9050	Stop End Unit LH - 75mm Height (Sloping) 150mm Rise 100mm Width	1	3-5 Working Days	10
9024	Stop End Unit Multi - 75mm Height 150mm Rise	1	3-5 Working Days	10
9018	Stop End Unit RH - Full Height 225mm Rise 50mm Width	1	3-5 Working Days	10
9020	Stop End Unit RH - Full Height 225mm Rise 75mm Width	1	3-5 Working Days	10
9022	Stop End Unit RH - Full Height 225mm Rise 100mm Width	1	3-5 Working Days	10
9019	Stop End Unit LH - Full Height 225mm Rise 50mm Width	1	3-5 Working Days	10
9021	Stop End Unit LH - Full Height 225mm Rise 75mm Width	1	3-5 Working Days	10
9023	Stop End Unit LH - Full Height 225mm Rise 100mm Width	1	3-5 Working Days	10
9051	Stop End Unit RH - 75mm Height (Sloping) 225mm Rise 50mm Width	1	3-5 Working Days	10
9053	Stop End Unit RH - 75mm Height (Sloping) 225mm Rise 75mm Width	1	3-5 Working Days	10
9055	Stop End Unit RH - 75mm Height (Sloping) 225mm Rise 100mm Width	1	3-5 Working Days	10
9052	Stop End Unit LH - 75mm Height (Sloping) 225mm Rise 50mm Width	1	3-5 Working Days	10
9054	Stop End Unit LH - 75mm Height (Sloping) 225mm Rise 75mm Width	1	3-5 Working Days	10
9056	Stop End Unit LH - 75mm Height (Sloping) 225mm Rise 100mm Width	1	3-5 Working Days	10
9001	Universal 90° Corner Unit 150mm Rise 50mm Width	1	3-5 Working Days	10
9002	Universal 90° Corner Unit 150mm Rise 75mm Width	1	3-5 Working Days	10
9003	Universal 90° Corner Unit 150mm Rise 100mm Width	1	3-5 Working Days	10
9004	Universal 90° Corner Unit 225mm Rise 50mm Width	1	3-5 Working Days	10
9005	Universal 90° Corner Unit 225mm Rise 75mm Width	1	3-5 Working Days	10
9006	Universal 90° Corner Unit 225mm Rise 100mm Width	1	3-5 Working Days	10
9026	Joint Supports 150mm Rise 50mm Width	1	3-5 Working Days	11
9027	Joint Supports 150mm Rise 75mm Width	1	3-5 Working Days	11
9028	Joint Supports 150mm Rise 100mm Width	1	3-5 Working Days	11
9030	Joint Supports 225mm Rise 50mm Width	1	3-5 Working Days	11
9031	Joint Supports 225mm Rise 75mm Width	1	3-5 Working Days	11
9032	Joint Supports 225mm Rise 100mm Width	1	3-5 Working Days	11





# CIVILS AND GROUNDWORKS

**timloc**  
building products



**Sales** | Phone: **01405 765 567** Email: [sales@timloc.co.uk](mailto:sales@timloc.co.uk) Web: [www.timloc.co.uk](http://www.timloc.co.uk)

**Technical** | Phone: **01405 782 769** Email: [technical@timloc.co.uk](mailto:technical@timloc.co.uk) Web: [www.timloc.co.uk](http://www.timloc.co.uk)