




## TECHNICAL DATASHEET - COMMERCIAL

### THERMOSTATIC EXPOSED SHOWER VALVE WITH CHROME LEVER – Top Outlet

#### Product Specification

<b>Product Code:</b>	<b>TS3650TO EL C</b>
<b>Finish:</b>	Chrome Plated
<b>Product Type:</b>	Commercial
<b>Construction:</b>	Body is of brass construction
<b>No of Controls:</b>	1
<b>Valve/Cartridge Type:</b>	Sequential Thermostatic Cartridge
<b>Supply:</b>	Suitable for all plumbing systems (Preferably balanced)
<b>Inlet Connections:</b>	15mm compression elbows
<b>Outlet Connections:</b>	G½"
<b>Working Pressures:</b>	Min 0.2bar, Max 5.0bar
<b>Isolation Valves:</b>	Included
<b>Check Valve:</b>	Included
<b>Dimensions for Fitting:</b>	140-160mm inlet centres

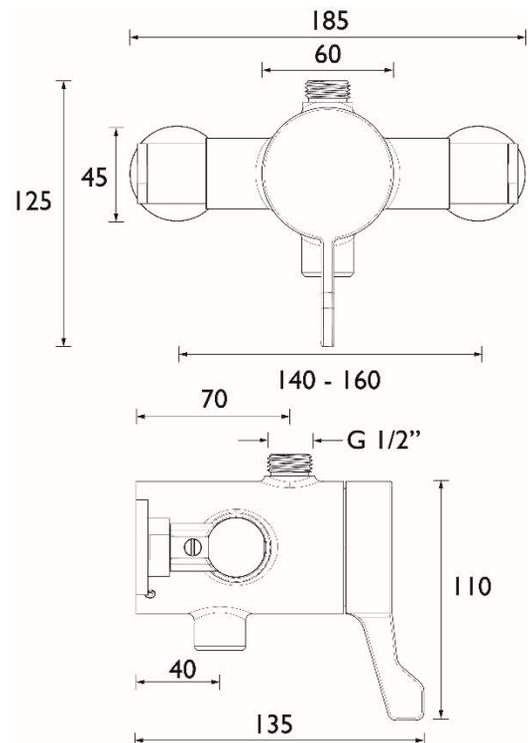

#### Additional Information

- Single sequential control for both temperature & flow.
- Automatic thermostatic shut-off in the event hot or cold water failure.
- High performance even at low pressure
- Check valves and serviceable filters as standard
- Supplied as 'valve only' ready to be customised by selecting a water saving wall mounted shower head along with other accessories from our showering range. For hand-held configurations see **TS3650 EL C**.
- Adjustable inlet centres between 140-160mm +/- 1mm.

**Technical Advice:** For further information please call 01795 423400 or email info@therodingroup.co.uk

**Guarantee:** 1 year covering manufacturing faults.

#### Compliance / Approvals

**WRAS:** Certificate N<sup>o</sup>: 2005903

**TMV2:** Certificate N<sup>o</sup>: NSF2276/0920

**TMV3:** Certificate N<sup>o</sup>: NSF2277/0720

