
INTRALUX® SELECT

INTRV.

INTRALUX® SELECT

This cost effective, hard-wearing barrier matting provides high levels of soil and moisture retention whilst still being comfortable underfoot. All the key requirements are met making this a popular choice for applications where budget is a priority.

- Available as an insert across our **full range** of primary recessed systems
- Heavy commercial use **33 wear rated** polyamide fibre
- **Cut pile fibres** ensure good dirt and moisture absorption
- **100%** Econyl
- **Clf-s1 Fire Retardant**
- Suitable for **use on stairs**
- Can also be **supplied in rolls or cuts** for next day service



Zonal
Options



Strength
Rating



5 Year
Warranty

ECONYL®
100% Regenerated Nylon



SPECIFICATION

INTRAlux® Select

Product Reference	INTRAlux Select, Polyamide Sheet Fibre Barrier Matting
Material	1000 g/m ² Pile Weight 100% PA6 100% recycled Econyl polyamide fibre
Installation	With surface of mat level with adjoining floor coveringsSurface mounted with low profile ramped edging trim – see INTRAlux Gripfit
Location	Zones 2+3
Construction	PC Non-Woven Backing with Polyamide Pile
Sustainability	100% Econyl
Weight	3.4kg/m ²
Depth	9mm
Fire Rating	Cfl-s1
Roll Size	25m x 2m
Uniclass	Pr_35_57_11_49 Loose-laid matting
CAWS	N10/310 Loose laid matting

COLOURS




208 Black



207 Grey

PROFILE

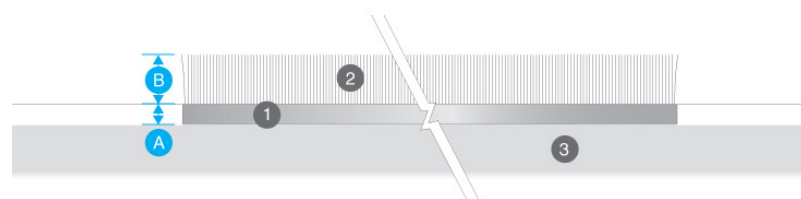

- A 2mm
- B 7mm
- 1 PVC backing
- 2 Fibre pile
- 3 Subfloor



ENVIRONMENT & SUSTAINABILITY

INTRAsystems has an undeviating commitment to act responsibly in its care of the environment. Working on key projects throughout the UK and Europe, the company is familiar with all environmental ratings such as Ska, BREEAM and WRAP to help clients achieve, and exceed, their sustainability goals.

We are ISO 14001 accredited and all production processes are managed in accordance with the Waste Management Act, with a clear goal to 'reduce the production of waste and its harmful effects.' INTRAsystems regularly reviews its wider operations to minimise negative environmental impacts.

Our Environmental Sustainability Statement sets clear targets for ongoing improvement to ensure the company continues to play its part in helping tackle the climate crisis. Environmental credentials for each fibre option are provided and highlighted throughout this brochure.



BREEAM®


ECONYL®

Benefits of specifying ECONYL® fibre

ECONYL® is regenerated nylon that would otherwise pollute the Earth. It is the same as brand new nylon and can be infinitely recycled, recreated and remoulded.

ECONYL® is Cradle-to-Cradle certified and therefore our fibres are eligible for LEED® v4 points, as part of the LEED green building rating system.



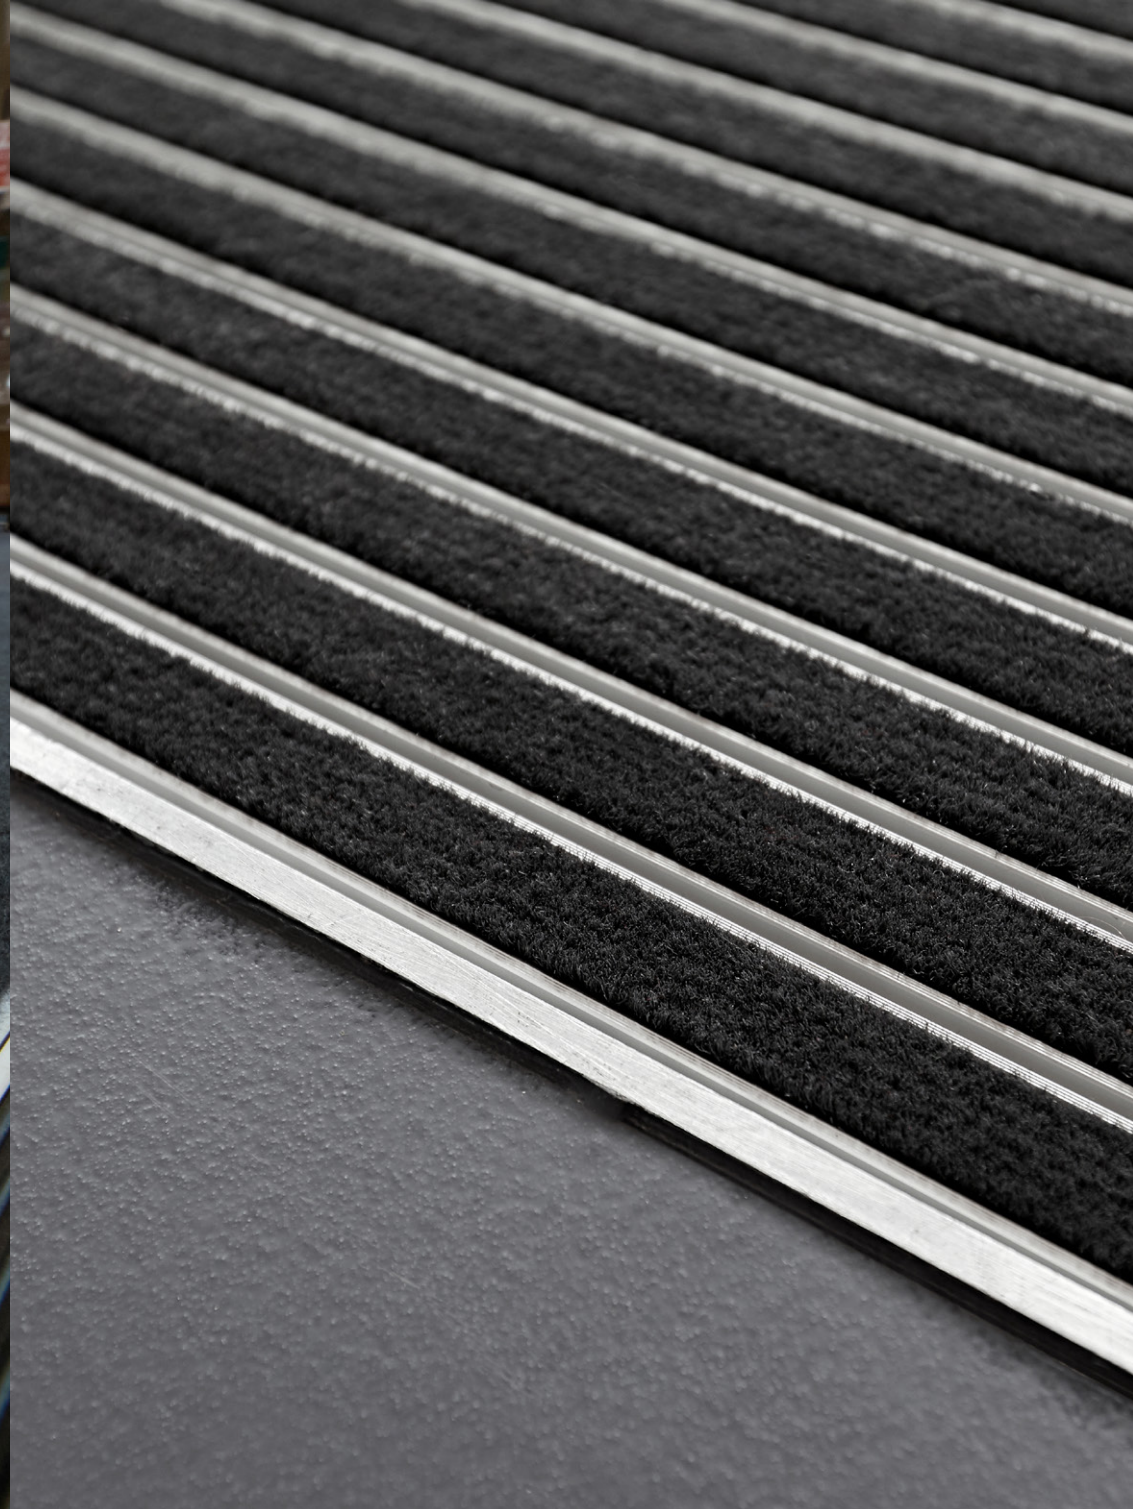



CPD
PROVIDER

Find us on:



NBS

bimstore



INTRALUX.
SYSTEMS

6 COBHAM ROAD, WIMBORNE, DORSET, BH21 7PE

01425 472000 INTRASYSTEMS.CO.UK

INTRALUX® SELECT V1.2