

Schlüter® - KERDI-LINE-G3

Supplementary price list PS 22

Great Britain · Effective 1st February 2022



2022



Schlüter®-KERDI-LINE-G3

Elegant drainage



LINEAR DRAINAGE, HORIZONTAL

Schlüter®-KERDI-LINE-G3

Specifically designed to simplify drainage from tiled showers and wetrooms – whether a new build or refurbishment project. Use in conjunction with the Schlüter®-KERDI system components and other Schlüter products to provide a fully waterproofed integrated system solution, as per ETAG 022 (watertight covering kits).

- ✓ Overall height = 78 mm
- ✓ Horizontal outlet – 40 mm ID/43 mm OD solvent weld, easily converted to 50 mm
- ✓ Pre-applied Schlüter®-KERDI waterproofing collar
- ✓ 'Shutter' gate clamp secures O-ring, creating a tight seal
- ✓ Air tightness as per Building Regulations
- ✓ Intermediate/central or wall/perimeter installation positions
- ✓ Choice of 8 channel lengths, 500 mm to 1200 mm in 100 mm increments
- ✓ Central, offset or dual outlet options

Complies with BS EN 1253 & BS EN 274

- ✓ Water trap/seal = 50 mm – easily removed for cleaning
- ✓ Anti-blockage as per 8 mm ball bearing test
- ✓ Odour tightness of 180Pa for 15 mins
- ✓ Water flow rate*
 - = 0.45 l/s (27 l/min) single outlet
 - = 0.80 l/s (48 l/min) dual outlet
- ✓ Channel loading strength = class K3 (300 kg)
- ✓ Easy access for cleaning


*measured as per BS EN 1253-1, with a 20 mm head of water.

Material Specifications



- ✓ Drain channel = stainless steel V4A (316)
- ✓ Water trap/seal = ABS
- ✓ Drain body/sump = ABS
- ✓ Outlet = solvent weld ABS
- ✓ O-ring = silicone
- ✓ Gasket = EPDM
- ✓ Channel support = polystyrene

LINEAR DRAINAGE, HORIZONTAL

Schlüter®-KERDI-LINE-G3

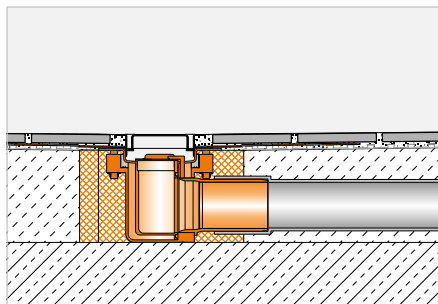


Schlüter-KERDI-LINE-G3 is a low-height linear drain constructed of stainless steel. This drain is available with central, offset and dual outlets and is suitable for perimeter or intermediate installation. As is standard for Schlüter linear drains, it also comes with a pre-adhered collar made of Schlüter-KERDI to create a reliable connection to the bonded waterproofing assembly.

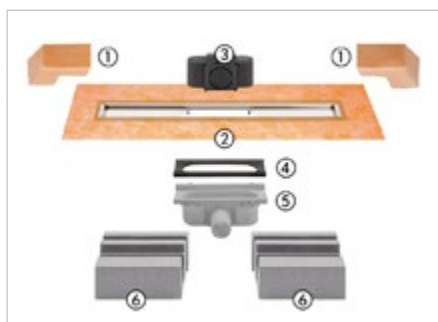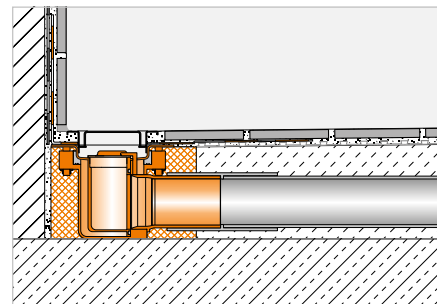

Schlüter®-KERDI-LINE-G3

centre outlet, stainless steel V4A linear drainage

L (cm)	L1 (cm)	Art. No.	£ / Set	P (Set)
50	55	KL F 43 G3E 50	277.78	10
60	65	KL F 43 G3E 60	288.07	10
70	75	KL F 43 G3E 70	298.36	10
80	85	KL F 43 G3E 80	308.64	10
90	95	KL F 43 G3E 90	318.93	10
100	105	KL F 43 G3E 100	329.22	10
110	115	KL F 43 G3E 110	339.51	10
120	125	KL F 43 G3E 120	349.80	10

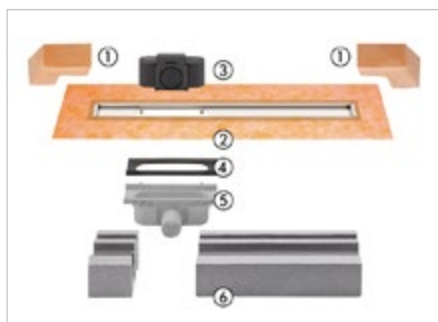

Schlüter®-KERDI-LINE-G3

left offset outlet, stainless steel V4A linear drainage


L (cm)	L1 (cm)	Art. No.	£ / Set	P (Set)
70	75	KL FOL 43 G3E 70	329.22	10
80	85	KL FOL 43 G3E 80	339.51	10
90	95	KL FOL 43 G3E 90	349.80	10
100	105	KL FOL 43 G3E 100	360.09	10
110	115	KL FOL 43 G3E 110	370.38	10
120	125	KL FOL 43 G3E 120	380.66	10

Set components:

- 1 corner seal (for upright wall connection)
- 2 channel body with sealing collar
- 3 odour seal
- 4 EPDM gasket
- 5 drain body
- 6 channel support

Technical data:


Drain	BS 40 (outside diameter 43 mm)
Drain capacity	0.45 l/s (single outlet) 0.8 l/s (dual outlet)
Water trap height	50 mm
Installation height	78 mm
Width of cover incl. frame	74 mm

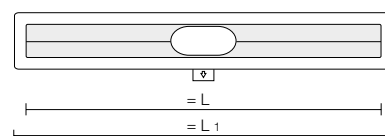



LINEAR DRAINAGE, HORIZONTAL


Schlüter®-KERDI-LINE-G3

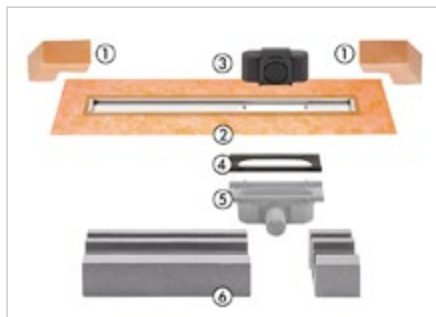

Schlüter®-KERDI-LINE-G3

right offset outlet, stainless steel V4A linear drainage

L (cm)	L1 (cm)	Art. No.	£ / Set	P (Set)
70	75	KL FOR 43 G3E 70	329.22	10
80	85	KL FOR 43 G3E 80	339.51	10
90	95	KL FOR 43 G3E 90	349.80	10
100	105	KL FOR 43 G3E 100	360.09	10
110	115	KL FOR 43 G3E 110	370.38	10
120	125	KL FOR 43 G3E 120	380.66	10

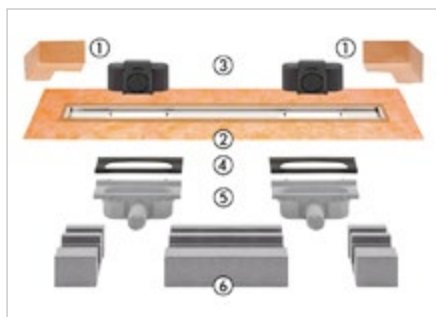

Schlüter®-KERDI-LINE-G3

dual offset outlet, stainless steel V4A linear drainage

L (cm)	L1 (cm)	Art. No.	£ / Set	P (Set)
100	105	KL F20 43 G3E 100	432.11	10
110	115	KL F20 43 G3E 110	442.39	10
120	125	KL F20 43 G3E 120	452.68	10

Note:

Schlüter-KERDI-LINE-G3 can only be combined with the grate and frame combinations Design A, Design B, Design D-G3 and KERDI-LINE-STYLE.

Set components:

- 1 corner seal (for upright wall connection)
- 2 channel body with sealing collar
- 3 odour seal
- 4 EPDM gasket
- 5 drain body
- 6 channel support

Technical data:


Drain	BS 40 (outside diameter 43 mm)
Drain capacity	0.45 l/s (single outlet) 0.8 l/s (dual outlet)
Water trap height	50 mm
Installation height	78 mm
Width of cover incl. frame	74 mm

COVERING SUPPORT

Schlüter®-KERDI-LINE-D-G3



Schlüter-KERDI-LINE-D-G3 is a frameless channel cover to match Schlüter-KERDI-LINE-G3 channel bodies. The covering support features a fleece fabric for bonding with the tile adhesive and is universally suitable for all covering thicknesses. (Product data sheet 8.7)

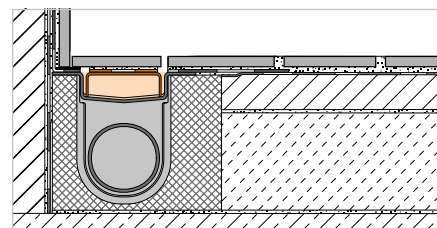


Note:

The length of the selected covering support must match the channel length.

Schlüter®-KERDI-LINE-D-G3


TILE design (frameless), stainless steel V4A

L (cm)	Art. No.	£ / U.	P (Unit)
49	KLD G3E 50	81.29	10
59	KLD G3E 60	85.84	10
69	KLD G3E 70	91.98	10
79	KLD G3E 80	97.48	10
89	KLD G3E 90	102.66	10
99	KLD G3E 100	109.09	10
109	KLD G3E 110	115.51	10
119	KLD G3E 120	120.68	10

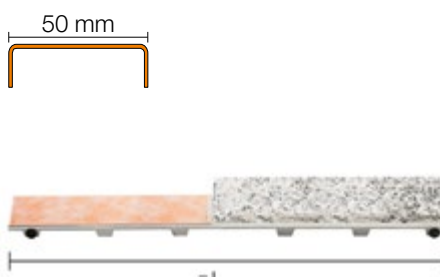





GRATE AND FRAME COMBINATION

Schlüter®-KERDI-LINE-STYLE

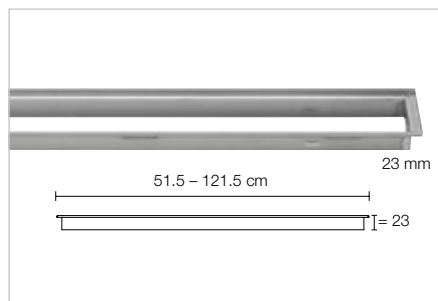

Schlüter-KERDI-LINE-STYLE are contour frames with elegant design covers made of brushed stainless steel to match Schlüter-KERDI-LINE channel bodies. The slim contour frame is seamlessly height-adjustable to accommodate covering materials in thicknesses from 6 to 18 mm. The covers are available in the design variants FLORAL, CURVE and PURE.

(Product data sheet 8.7)

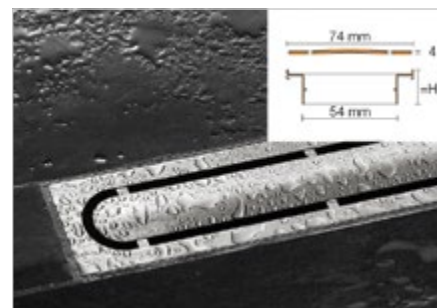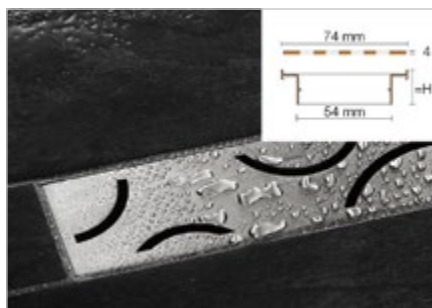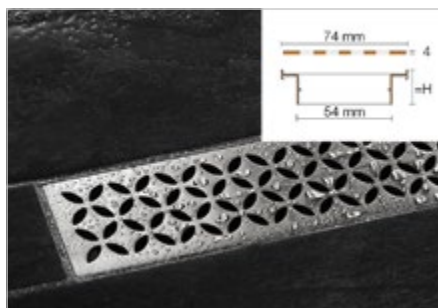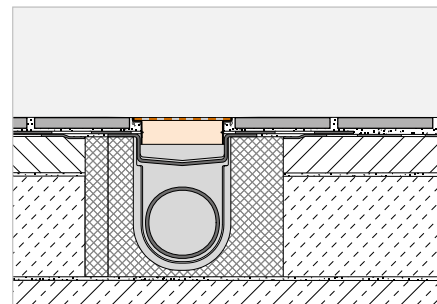

Schlüter®-KERDI-LINE-IF-E

FLORAL design, 23 mm frame, stainless steel V4A, brushed

L (cm)	H = 23 mm Art. No.	£ / Set	P (Set)
50	KLIFE 23 EB 50	280.69	10
60	KLIFE 23 EB 60	291.28	10
70	KLIFE 23 EB 70	301.88	10
80	KLIFE 23 EB 80	323.06	10
90	KLIFE 23 EB 90	344.25	10
100	KLIFE 23 EB 100	365.44	10
110	KLIFE 23 EB 110	386.62	10
120	KLIFE 23 EB 120	407.80	10

Schlüter®-KERDI-LINE-IF-F

CURVE design, 23 mm frame, stainless steel V4A, brushed

L (cm)	H = 23 mm Art. No.	£ / Set	P (Set)
50	KLIFF 23 EB 50	270.11	10
60	KLIFF 23 EB 60	280.69	10
70	KLIFF 23 EB 70	291.28	10
80	KLIFF 23 EB 80	307.18	10
90	KLIFF 23 EB 90	323.06	10
100	KLIFF 23 EB 100	338.95	10
110	KLIFF 23 EB 110	354.83	10
120	KLIFF 23 EB 120	370.72	10

Schlüter®-KERDI-LINE-IF-G

PURE design, 23 mm frame, stainless steel V4A, brushed

L (cm)	H = 23 mm Art. No.	£ / Set	P (Set)
50	KLIFG 23 EB 50	301.88	10
60	KLIFG 23 EB 60	312.48	10
70	KLIFG 23 EB 70	323.06	10
80	KLIFG 23 EB 80	338.95	10
90	KLIFG 23 EB 90	354.83	10
100	KLIFG 23 EB 100	370.72	10
110	KLIFG 23 EB 110	386.62	10
120	KLIFG 23 EB 120	407.80	10

Note:


H = 23 mm for covering thicknesses 6 - 18 mm

Covers and frames cannot be combined with Schlüter-KERDI-LINE-A/-B/-D-G3.






GRATE AND FRAME COMBINATION

Schlüter®-KERDI-LINE-A/-B

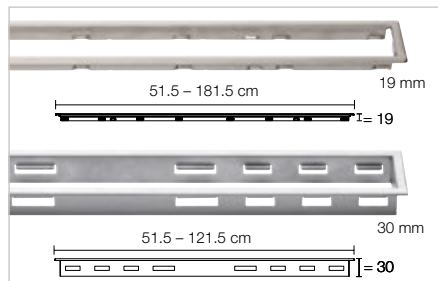

Schlüter-KERDI-LINE are profile frames made of brushed, polished or colour coated stainless steel with classic grate covers that match Schlüter-KERDI-LINE channel bodies. The profile frames are seamlessly height adjustable to accommodate covering materials in thicknesses from 3 to 25 mm. The covers are available in the design variants SOLID (A) and SQUARE (B).
(Product data sheet 8.7)

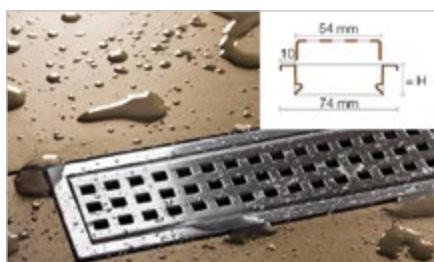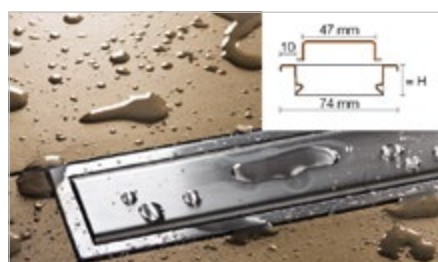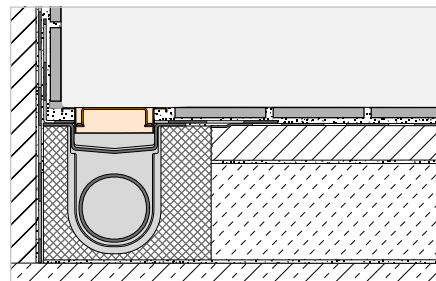

Schlüter®-KERDI-LINE-A

SOLID design, 19 mm frame, stainless steel V4A, brushed

L (cm)	H = 19 mm Art. No.	£ / Set	P (Set)
50	KLA 19 EB 50	217.09	10
60	KLA 19 EB 60	222.85	10
70	KLA 19 EB 70	228.50	10
80	KLA 19 EB 80	234.27	10
90	KLA 19 EB 90	239.92	10
100	KLA 19 EB 100	245.57	10
110	KLA 19 EB 110	251.60	10
120	KLA 19 EB 120	257.41	10



Schlüter®-KERDI-LINE-B

SQUARE design, 19 mm frame, stainless steel V4A, brushed

L (cm)	H = 19 mm Art. No.	£ / Set	P (Set)
50	KLB 19 EB 50	217.09	10
60	KLB 19 EB 60	222.85	10
70	KLB 19 EB 70	228.50	10
80	KLB 19 EB 80	234.27	10
90	KLB 19 EB 90	239.92	10
100	KLB 19 EB 100	245.57	10
110	KLB 19 EB 110	251.60	10
120	KLB 19 EB 120	257.41	10

Note:

H = 19 mm for covering thicknesses 3 - 15 mm

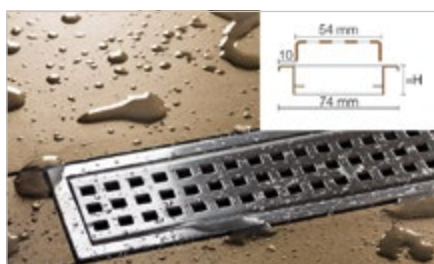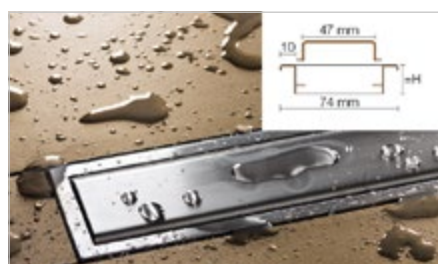

Schlüter®-KERDI-LINE-A

SOLID design, 30 mm frame, stainless steel V4A, brushed

L (cm)	H = 30 mm Art. No.	£ / Set	P (Set)
50	KLA 30 EB 50	223.78	10
60	KLA 30 EB 60	229.16	10
70	KLA 30 EB 70	234.95	10
80	KLA 30 EB 80	241.79	10
90	KLA 30 EB 90	246.64	10
100	KLA 30 EB 100	252.69	10
110	KLA 30 EB 110	258.60	10
120	KLA 30 EB 120	263.45	10


Schlüter®-KERDI-LINE-B

SQUARE design, 30 mm frame, stainless steel V4A, brushed

L (cm)	H = 30 mm Art. No.	£ / Set	P (Set)
50	KLB 30 EB 50	223.78	10
60	KLB 30 EB 60	229.16	10
70	KLB 30 EB 70	234.95	10
80	KLB 30 EB 80	241.79	10
90	KLB 30 EB 90	246.64	10
100	KLB 30 EB 100	252.69	10
110	KLB 30 EB 110	258.60	10
120	KLB 30 EB 120	263.45	10

Note:

H = 30 mm for covering thicknesses 13 - 25 mm

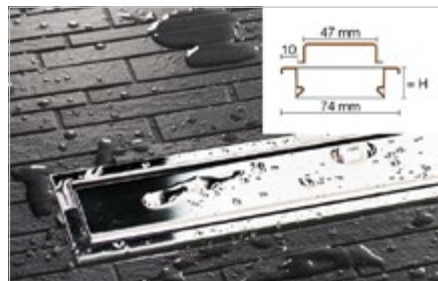

Schlüter®-KERDI-LINE-A

SOLID design, 19 mm frame,
polished stainless steel V4A

L (cm)	H = 19 mm Art. No.	£ / Set	P (Set)
50	KLA 19 EP 50	214.54	10
60	KLA 19 EP 60	220.25	10
70	KLA 19 EP 70	225.82	10
80	KLA 19 EP 80	231.52	10
90	KLA 19 EP 90	237.11	10
100	KLA 19 EP 100	242.69	10
110	KLA 19 EP 110	248.66	10
120	KLA 19 EP 120	254.39	10

Schlüter®-KERDI-LINE-B

SQUARE design, 19 mm frame,
polished stainless steel V4A



L (cm)	H = 19 mm Art. No.	£ / Set	P (Set)
50	KLB 19 EP 50	214.54	10
60	KLB 19 EP 60	220.25	10
70	KLB 19 EP 70	225.82	10
80	KLB 19 EP 80	231.52	10
90	KLB 19 EP 90	237.11	10
100	KLB 19 EP 100	242.69	10
110	KLB 19 EP 110	248.66	10
120	KLB 19 EP 120	254.39	10



Polished stainless steel to match
chrome finishes

Note:

H = 19 mm for covering thicknesses
3 - 15 mm

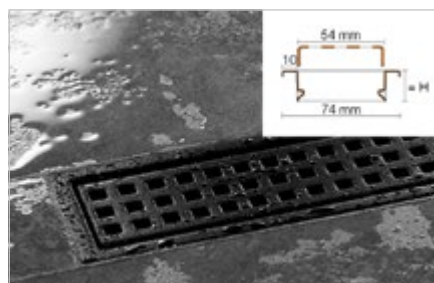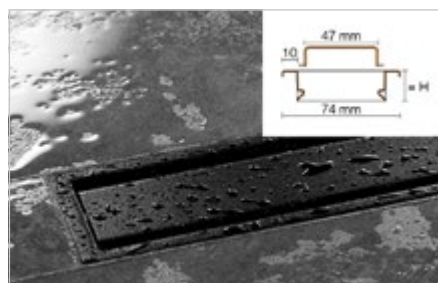

Schlüter®-KERDI-LINE-A



SOLID design, 19 mm frame,
colour coated stainless steel V4A, matte
graphite black

L (cm)	H = 19 mm Art. No.	£ / Set	P (Set)
50	KLA 19 MGS 50	254.93	10
60	KLA 19 MGS 60	261.73	10
70	KLA 19 MGS 70	268.33	10
80	KLA 19 MGS 80	275.11	10
90	KLA 19 MGS 90	281.77	10
100	KLA 19 MGS 100	288.40	10
110	KLA 19 MGS 110	295.46	10
120	KLA 19 MGS 120	302.30	10

Schlüter®-KERDI-LINE-B



SQUARE design, 19 mm frame,
colour coated stainless steel V4A, matte
graphite black

L (cm)	H = 19 mm Art. No.	£ / Set	P (Set)
50	KLB 19 MGS 50	254.93	10
60	KLB 19 MGS 60	261.73	10
70	KLB 19 MGS 70	268.33	10
80	KLB 19 MGS 80	275.11	10
90	KLB 19 MGS 90	281.77	10
100	KLB 19 MGS 100	288.40	10
110	KLB 19 MGS 110	295.46	10
120	KLB 19 MGS 120	302.30	10



Now also available in
matte graphite black (MGS)

Note:

H = 19 mm for covering thicknesses
3 - 15 mm



Schlüter®-KERDI

Fully matched complete system

Schlüter®-KERDI-LINE-G3 works hand-in-hand with the dependable range of Schlüter-KERDI components to provide a fully waterproofed integrated system solution.

These items are detailed on the following pages to give you an all-in-one reference for wetroom creation.

Typically the selection process would be:

- ✓ Choose the length of drainage channel (50 cm to 120 cm, in 10 cm increments)
- ✓ Choose the position of the outlet (centre, offset or dual)
- ✓ Choose the grate design, taking into account the thickness of the tiles being used on the floor of the shower area
- ✓ Choose the Schlüter®-SHOWER pre-formed shower tray, taking into account whether the drain is positioned against the wall/perimeter or in a intermediate/central position
- ✓ Choose the waterproof wall covering, either Schlüter-KERDI or /-KERDI-BOARD
- ✓ Choose the waterproof floor covering, either Schlüter-DITRA 25 or /-DITRA-HEAT-DUO
- ✓ Choose the sealing components such as Schlüter®-KERDI-KEBA, /-KERDI-KERECK-F and /-KERDI-MV
- ✓ Choose the sealing adhesives Schlüter®-KERDI-COLL-L and Schlüter®-KERDI-FIX

Other items in the Schlüter range, such as profiles, shelves and additional heating components can be found in the Schlüter®-PROFILES and -SYSTEMS Illustrated price list PS22.




SLOPED TRAY

Schlüter®-KERDI-SHOWER-LTS



Schlüter-KERDI-SHOWER-LTS is a sloped tray made of compression-resistant polystyrene with pre-adhered Schlüter-KERDI waterproofing. In showers, it creates a sufficient slope to the linear drainage Schlüter-KERDI-LINE positioned along walls. The sloped tray is installed on a level, flat, load bearing substrate and fitted to the drainage channel. In cases of vertical drainage, the sloped tray can also be installed directly on suitable substrates. Where necessary the trays can be cut to size with a utility knife, using the pre-marked cutting grooves on the underside of the tray.


(Product data sheet 8.8)

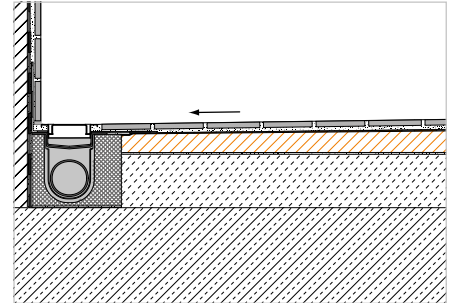

Schlüter®-KERDI-SHOWER-LTS

sloped tray for linear drainage, for installation in wall transition areas, short side

L x B (cm)	H (mm)	H1 (mm)	Art. No.	£ / U.	P (Unit)
200 x 136	39	13	KSLT 1365 / 2000 S*	235.08	10

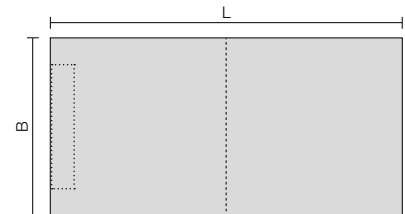


BONDED WATERPROOFING

Schlüter®-KERDI



Schlüter-KERDI is a polyethylene waterproofing membrane with an anchoring fleece laminated on both sides. It is suitable for waterproofing in conjunction with tiled surfaces on walls and floors. The high water vapour diffusion resistance of Schlüter-KERDI-DS makes it suitable as a vapour barrier in bonded floor assemblies with tile coverings.

(Product data sheet 8.1)

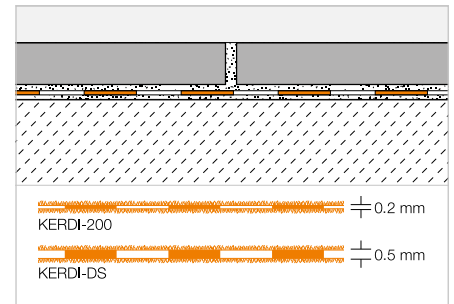

Schlüter®-KERDI-200

polyethylene rolls

L (m)	m²	width = 1.00 m Art. No.	£ / m²	PL (Roll)
5	5	KERDI 200 / 5M	20.24	75
10	10	KERDI 200 / 10M	18.30	50
30	30	KERDI 200	16.60	20
width = 1.50 m				
20	30	KERDI 200 150 / 20M	16.60	20
width = 2.00 m				
15	30	KERDI 200 200 / 15M	16.60	20

Schlüter®-KERDI-DS

polyethylene rolls, vapour barrier

L (m)	width = 1.00 m Art. No.	£ / m²	PL (Roll)
30	KERDI-DS	19.19	25

Tool Tip:

Schlüter-TROWEL, 4 x 4 notching, see page 291, PROFILES and SYSTEMS Illustrated price list PS 22.




SUBSTRATE PANEL

Schlüter®-KERDI-BOARD



Schlüter-KERDI-BOARD is a universal substrate for the installation of tiles on walls of any kind and can also be used in bonded waterproofing assemblies.
(Product data sheet 12.1)

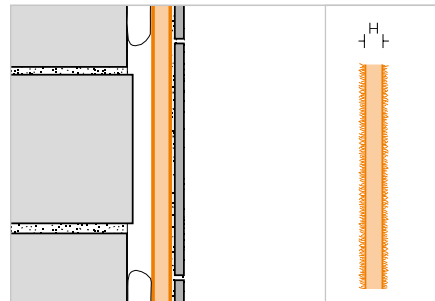

Schlüter®-KERDI-BOARD

substrate panel

H (mm)	62.5 x 260 cm = 1.62 m ² Art. No.	£ / m ²	PL (Unit)
5	KB 5 625 2600	29.62	140
9	KB 9 625 2600	31.05	80
12.5	KB 12 625 2600	32.53	60
19	KB 19 625 2600	33.97	42
28	KB 28 625 2600	37.73	28
29	KB 38 625 2600	42.38	21
50	KB 50 625 2600	47.62	15

Schlüter®-KERDI-BOARD


substrate panel

H (mm)	62.5 x 125 cm = 0.78 m ² Art. No.	£ / m ²	PL (Unit)
5	KB 5 625 1250	29.62	140
9	KB 9 625 1250	31.05	80
12.5	KB 12 625 1250	32.53	60
19	KB 19 625 1250	33.97	42
28	KB 28 625 1250	37.73	28
29	KB 38 625 1250	42.38	21
50	KB 50 625 1250	47.62	15




SEALING TAPE

Schlüter®-KERDI-KEBA

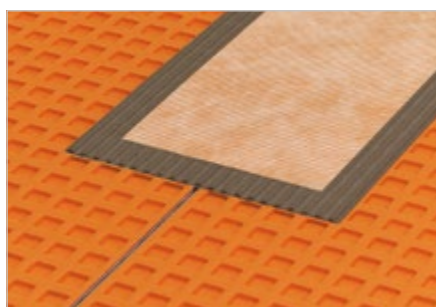

Schlüter-KERDI-KEBA is a sealing band to seal mat connections and wall to floor connections.
(Product data sheet 8.1)

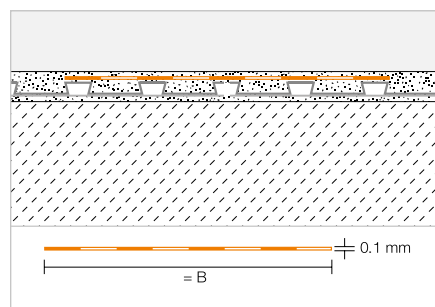

Schlüter®-KERDI-KEBA

polyethylene rolls

B (mm)	roll = 30 m Art. No.	£ / m	PL (Roll)
85	KEBA 100 / 85	2.27	336
125	KEBA 100 / 125	3.39	210
150	KEBA 100 / 150	3.57	210
185	KEBA 100 / 185	4.65	168
250	KEBA 100 / 250	6.02	126


Schlüter®-KERDI-KEBA/5M

polyethylene rolls

B (mm)	roll = 5 m Art. No.	£ / m	P (Roll)
85	KEBA 100 / 85 / 5M	3.22	10
125	KEBA 100 / 125 / 5M	4.26	10
150	KEBA 100 / 150 / 5M	4.56	10
185	KEBA 100 / 185 / 5M	5.54	10
250	KEBA 100 / 250 / 5M	6.94	10

CORNER SEAL

Schlüter®-KERDI-KERECK-F

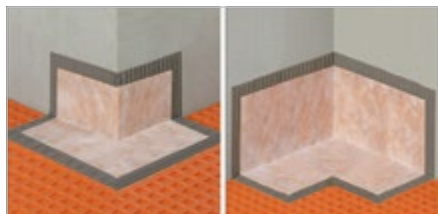

Schlüter-KERDI-KERECK-F are completely seam sealed, prefabricated parts to create internal and external corners.
(Product data sheet 8.1)

Schlüter®-KERDI-KERECK/FA

90° external corner, prefabricated

Thickness (mm)	set = 2 units Art. No.	£ / Set	P (Set)
0.1	KERECK / FA2	19.10	10
0.1	KERECK / FA10	80.53	10

Schlüter®-KERDI-KERECK/FI

90° internal corner, prefabricated

Thickness (mm)	set = 2 units Art. No.	£ / Set	P (Set)
0.1	KERECK / FI2	16.31	10
0.1	KERECK / FI10	66.83	10

Schlüter®-KERDI-KERECK/FI 135°

135° internal corner, prefabricated

Thickness (mm)	set = 2 units Art. No.	£ / Set	P (Set)
0.1	KERECK 135 FI2	19.34	10

WATERPROOFING COLLAR

Schlüter®-KERDI-MV

Schlüter-KERDI-MV are prefabricated collars for DIN 18534-compliant waterproofing of pipe penetrations. Thanks to their fleece-free inner zone, the collars are suitable for use with multiple pipe diameters (see table).

(Product data sheet 8.1)

Schlüter®-KERDI-MV

collar with fleece-free inner zone (includes: 1 unit)

Ø mm	For pipe diameter (mm)	Art. No.	£ / U.	P (Unit)
9	12 – 30	KMV 9	7.99	10
15	22 – 40	KMV 15	7.99	10
21	30 – 60	KMV 21	8.89	10
35	45 – 80	KMV 35	9.50	10
65	75 – 140	KMV 65	11.99	10
15	22 – 40	KMV 15 D	14.34	10

Schlüter®-KERDI-MV

collar with fleece-free inner zone (includes: 10 units)

Ø mm	For pipe diameter (mm)	Art. No.	£ / Package	P (Package)
15	22 – 40	KMV 15/10	64.26	10
15	22 – 40	KMV 15 D/10	118.04	10



KMV 9



KMV 15



KMV 21



KMV 35





KMV 65



KMV 15 D*

* centre line 150 mm






SEALING ADHESIVE

Schlüter®-KERDI-COLL-L



Schlüter-KERDI-COLL-L is a two component sealant adhesive based on a solvent free acrylate dispersion and a reactive cementitious powder. It is suitable for adhering and sealing overlaps of Schlüter-KERDI membranes. In addition, Schlüter-KERDI-COLL-L can be used to tightly adhere the sealing band Schlüter-KERDI-KEBA on bonded waterproofing assemblies made with suitable Schlüter-Systems products as well as on Schlüter-BARA edging profiles.


(Product data sheet 8.4)

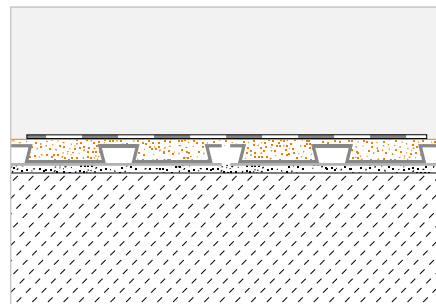

Schlüter®-KERDI-COLL-L

two-component sealing adhesive

Weight (kg)	Art. No.	£ / kg	PL (Unit)
1.85	KERDI-COLL-L 185	11.09	110
4.25	KERDI-COLL-L	9.13	75

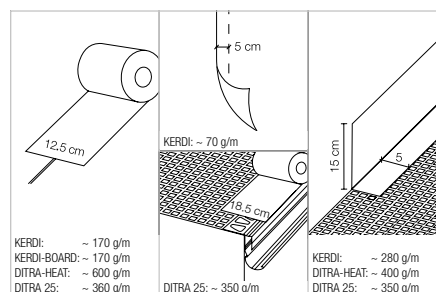

INSTALLATION ADHESIVE

Schlüter®-KERDI-FIX



Schlüter-KERDI-FIX is an MS polymer based elastic adhesive. It is suited for adjoining profiles and Schlüter-KERDI-BOARD as well as sealing the abutments and joint areas of Schlüter-KERDI waterproofing membrane sections.

(Product data sheet 8.3)



Schlüter®-KERDI-FIX

MS polymer adhesive

Fill volume (ml)	Art. No.	£ / U.	P (Unit)
290	KERDIFIX / BW	19.15	12
290	KERDIFIX / G	19.15	12




BONDED UNCOUPLING

Schlüter®-DITRA 25



Schlüter-DITRA 25 is a polyethylene mat with square, dovetailed recesses and an anchoring fleece laminated to the underside. In conjunction with tiled coverings, Schlüter-DITRA forms an uncoupling, waterproofing and vapour pressure equalisation layer. (Product data sheet 6.1)

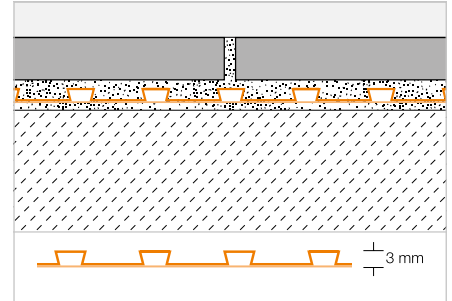

Schlüter®-DITRA 25

polyethylene rolls

L (m)	width = 1.00 m Art. No.	£ / m ²	PL (Roll)
5	DITRA 25 5M	19.76	22
30	DITRA 25 30M	16.40	6

Tool Tip:


Schlüter-TROWEL, 4 x 4 notching, see page 291, PROFILES and SYSTEMS Illustrated price list PS 22.

BONDED UNCOUPLING | HEATING

Schlüter®-DITRA-HEAT-DUO



Schlüter-DITRA-HEAT-DUO is a polypropylene membrane with a cut back stud structure and a special, 2 mm anchoring fleece laminated on the underside. The unique thermal break fleece, in addition to reducing impact sound by up to 13 dB, enables faster heating response. A universal substrate for tile coverings, which serves as a bonded waterproofing, uncoupling, crack bridging, and vapour pressure equalisation layer. Designed for the attachment of the matching system heating cables for a floor and wall solution. (Product data sheet 6.4)

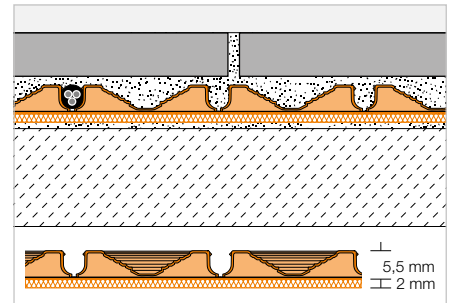

Schlüter®-DITRA-HEAT-DUO-MA

polyethylene mats with 2 mm thermal break fleece

L x B = m ²	Art. No.	£ / m ²	PL (Unit)
0.8 x 0.98 = 0.78	DH D 8 MA	23.59	100

Schlüter®-DITRA-HEAT-DUO

polyethylene rolls with 2 mm thermal break fleece

L x B = m ²	Art. No.	£ / m ²	PL (Unit)
10.2 x 0.98 = 10	DH D 810 M	20.92	6

Tool Tip:

Schlüter-TROWEL, 6 x 6 notching, see page 291, PROFILES and SYSTEMS Illustrated price list PS 22.





BONDED UNCOUPLING | HEATING THERMOSTAT

Schlüter®-DITRA-HEAT-E-R-WIFI



Schlüter-DITRA-HEAT-E-R-WIFI is a smart thermostat for full control of the electrical heating of floor and wall coverings with Schlüter-DITRA-HEAT-E. It can be operated via the 2" (5.1 cm) touchscreen display or remotely using a smartphone or tablet with the dedicated Schlüter-HEAT-CONTROL app for iOS and Android devices. The smart thermostat can either be used exclusively to set the covering temperature or for temperature control with room air adjustment. A spare sensor is included in the scope of supply.
(Product data sheet 6.4)

Schlüter®-DITRA-HEAT-E-R-WIFI

touchscreen thermostat (230 V)
with two remote sensors and WiFi function

Art. No.	£ / Set	P (Set)
DH E RT 5 / BW	255.62	10

BONDED UNCOUPLING | HEATING CABLE

Schlüter®-DITRA-HEAT-E-HK



Schlüter-DITRA-HEAT-E-HK is an electrical heating cable with a unilateral connection for installation in the uncoupling mat Schlüter-DITRA-HEAT.
(Product data sheet 6.4)

Schlüter®-DITRA-HEAT-E-HK

heating cable

L = (m)	Heated floor 136 W/m² *	Heated wall 200 W/m² **	Watts	Art. No.	£ / U.	PL (Roll)
	m²	m²				
4	0.4	0.25	50	DH E HK 4	98.27	10
6.76	0.6	0.43	85	DH E HK 6	104.40	10
12.07	1.1	0.7	150	DH E HK 12	162.07	10
17.66	1.6	1	225	DH E HK 17	191.61	10
23.77	2.2	1.5	300	DH E HK 23	213.52	10
29.87	2.7	1.8	375	DH E HK 29	251.84	10
35.97	3.3	2.2	450	DH E HK 35	290.16	10
41.56	3.8	2.6	525	DH E HK 41	323.01	10
47.67	4.4	2.9	600	DH E HK 47	370.10	10
53.77	5	3.3	675	DH E HK 53	410.63	10
59.87	5.5	3.7	750	DH E HK 59	438.00	10
71.57	6.6	4.4	900	DH E HK 71	503.68	10
83.77	7.7	5.1	1050	DH E HK 83	591.27	10
95.47	8.8	5.9	1200	DH E HK 95	673.40	10
107.67	10	6.6	1350	DH E HK 107	739.10	10
136.16	12.7	8.4	1700	DH E HK 136	885.95	10
164.07	15	10	2050	DH E HK 164	1059.74	10
192.27	17.7	11.8	2400	DH E HK 192	1239.91	10
216.27	20	13.2	2700	DH E HK 216	1393.56	10
244.37	22.7	15.1	3050	DH E HK 244	1563.13	10

* For use in floor and wall areas ** For use in wall areas only

Note:

Heating cables must not be shortened. When selecting the heating cable, please note that the table indicates the heated space in m², not the room size. To determine the heated space, deduct unheated zones such as perimeter areas and storage space from the room size.

BONDED UNCOUPLING | HEATING KITS



Schlüter®-DITRA-HEAT-E-DUO-S



Schlüter-DITRA-HEAT-E-DUO-S are complete sets for electrical heating of floor and wall coverings. They contain the uncoupling mats Schlüter-DITRA-HEAT-DUO-MA (0.8 x 0.98 m), the heating cables Schlüter-DITRA-HEAT-E-HK, and the touchscreen thermostat Schlüter-DITRA-HEAT-E-R or the WiFi touchscreen thermostat Schlüter-DITRA-HEAT-E-R-WIFI. Due to the unique anchoring fleece, the uncoupling mat not only reduces impact sound by up to 13dB, but also provide quicker heat-up response. Where necessary, the uncoupled area can be expanded with additional Schlüter-DITRA-HEAT-DUO membranes.

(Product data sheet 6.4)

All sets include:

- Schlüter-DITRA-HEAT-DUO-MA uncoupling mats, see table
- Heating cable Schlüter-DITRA-HEAT-E-HK; see table
(installation around every 3rd stud $\triangleq$ 136 W/m² / installation around every 2nd stud $\triangleq$ 200 W/m²)
- 1 x Schlüter-DITRA-HEAT-E-R WiFi touchscreen thermostat
- 2 x junction boxes
- 1 x conduit (3 m)

Schlüter®-DITRA-HEAT-E-DUO-S



complete set for floor and wall installations with WiFi

Schlüter®-DITRA-HEAT-DUO-MA		Schlüter®-DITRA-HEAT-E-HK				Art. No.	£ / Set	P (Set)
Number of mats	Uncoupled area in m²	Heated floor 136 W/m² *		Heated wall 200 W/m² **				
		m²	W	m²	W			
2	1.5	1.1	150	0.7	150	DH D RT5 S1	415.67	9
3	2.3	1.6	225	1	225	DH D RT5 S2	458.24	9
4	3.1	2.2	300	1.5	300	DH D RT5 S3	493.73	9
5	3.9	2.7	375	1.8	375	DH D RT5 S4	545.43	8
6	4.7	3.3	450	2.2	450	DH D RT5 S5	597.15	8
7	5.4	3.8	525	2.6	525	DH D RT5 S6	655.95	5
8	6.2	4.4	600	2.9	600	DH D RT5 S7	707.65	5
9	7	5	675	3.3	675	DH D RT5 S8	769.49	4
10	7.8	5.5	750	3.7	750	DH D RT5 S9	816.13	4


* For use in floor and wall areas

** For use in wall areas only



www.schluter-systems.com

Schlüter®-KERDI-BOARD



Information on the level of volatile substance emission in indoor air, presenting a risk of inhalation toxicity, on a scale ranging from A + (very low emissions) to C (high emissions)



Subject to the General Terms and Conditions of Schlüter-Systems Ltd.

All previous price lists lose their validity on the publication of this price list. Errors, changes, and printing mistakes as well as changes necessary in the interest of product innovation or shipping reserved. For reasons of printing, colours shown in this price list may differ from actual product colours.

You find the actual "General Terms and Conditions" of Schlüter-Systems Ltd. here:

www.schluter.co.uk/downloads.aspx



P R O F I L E O F I N N O V A T I O N

Schlüter-Systems KG · Schmölestraße 7 · D-58640 Iserlohn · Tel.: +49 2371 971-261 · Fax: +49 2371 971-112
info@schluter.de · www.schluter-systems.com

Schlüter-Systems Ltd · Units 3-5 Bardon 22 · Beveridge Lane · Coalville · Leicestershire · LE67 1TE
Tel.: +44 1530 813396 · Fax: +44 1530 813376 · technical@schluter.co.uk · sales@schluter.co.uk · www.schluter.co.uk