



Y-Pattern Strainer Valves Range

Conex Banninger Y-Pattern Strainer Valves

During installation and subsequent operation, debris and scale flowing through the system can cause considerable damage to pipeline systems. The use of Conex Banninger Y-Pattern Strainer Valves will assist in reducing any problems caused by foreign bodies in the pipe. The design of the strainer body has been created to minimise the pressure drop across the valve by using a curved profile which assists in reducing turbulence. Conex Banninger Y-Pattern Strainer Valves are sized to allow the valve to collect a reasonable amount of material before pressure reductions require the strainer to be cleaned.

Applications and uses

Y-Pattern Strainer Valves are typically used in applications where the amount of solids to be removed is small, and where frequent clean-out is not required. Conex Banninger Y-Pattern Strainer Valves are approved for drinking water, and are also suitable for low temperature hot water systems. In addition, bronze valves are suitable for chilled systems.

Valve materials

Valves made from yellow brass are suitable for general purpose applications. They are not recommended for chilled water systems because of a risk of stress corrosion cracking or waters which may result in dezincification.

Valves made from bronze are suitable for a broad range of applications as they are classed as immune to dezincification, stress corrosion cracking and are highly corrosion resistant. Stress corrosion cracking occurs occasionally in brass valves where high levels of stress in the component are combined with a corrosive environment causing cracks to form and grow. Common corrosive environments for brass are items that contain ammonia, or ammoniacal compounds. These can be found in cleaning fluids, refrigeration gases, sewage waste products, building materials and insulating materials.

For further information refer to Stress Corrosion Cracking at www.conexbanninger.com/standards

Quality assurance

Conex Universal Ltd is an ISO 9001 Quality Assured company and is registered with the BSI.

5-year warranty

When professionally fitted and in accordance with the installation instructions, Conex Banninger Valves are guaranteed against manufacturing defects for five years from first purchase date. Any alleged defects must be reported to Conex Universal Ltd within one month of the first occurrence, clearly setting out the nature of the claim. The warranty is limited to the repair and replacement of defective fittings at the discretion of Conex Universal Ltd and the company reserves the right to inspect and test the alleged defects. This warranty provided by Conex Universal Ltd does not affect your statutory rights. For more information visit www.conexbanninger.com.


General information

Performance data, including pressure - temperature ratings have been developed from published standards, supplier material specifications, design calculations and in-house testing. They cover typical applications for the Conex Banninger Valve product range and are provided as a general guideline.

For specific applications, users are advised to contact Conex Universal Ltd for technical advice. Failure to follow advised installation instructions may result in damage and personal injury for which Conex Universal Ltd cannot be held liable.

Contents

1802 Y-Pattern Strainer - PN16 - (Brass)	1
1804 Y-Pattern Strainer - PN16 - (Bronze)	3

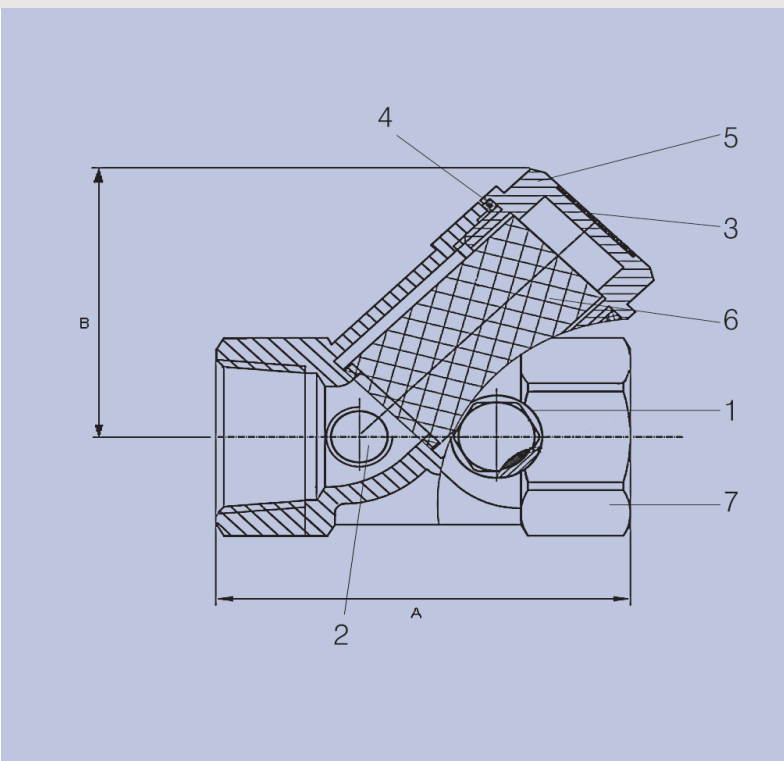

Valve range

1802 Y-Pattern Strainer - PN16 - (Brass)

Material specification

1802 - 1/2" - 4"

No	Component	Material	Specification
1	O-ring	EPDM	EN 2430:1995
2	Blanking Plug*	DZR Brass	EN 12164 CW602N
3	Rating Disc	Aluminium	EN 1706 LM6
4	Washer	PTFE	PTFE
5	Cap	Brass	EN 12165 CW617N-DW
6	Filter Screen	Stainless Steel	ISO.15510
7	Body	Brass	EN 12165 CW617N-DW

*Drilled and tapped bosses to special order.

Features and benefits:

- Streamlined design in order to minimise pressure drop.
- Stainless steel mesh, density 350 holes per square inch.
- Robust and compact design.
- Available with drilled and tapped bosses to special order.
- End connections, taper threads to EN 10226-2 (ISO 7-1).
- WRAS approved for drinking water applications.
- Suitable for low temperature hot water systems.
- Parallel threads to ISO 228 available to special order.

Y-Pattern Strainer - 1802

Order Code BS EN 10226-2 (ISO 7-1) thread	Size	DN	A	B	Kv Value	Weight (kg)
180210RR0160404	1/2"	15	65	42	2.35	0.152
180210RR0160606	3/4"	20	75	50	3.3	0.246
180210RR0160808	1"	25	90	56	6.5	0.358
180210RR0161010	1 1/4"	32	110	65	11	0.584
180210RR0161212	1 1/2"	40	120	75	13.5	0.868
180210RR0161616	2"	50	135	90	15.6	1.270
180210RR0162020*	2 1/2"	65	-	-	-	-
180210RR0162424*	3"	80	-	-	-	-
180210RR0163232*	4"	100	-	-	-	-

*Valves available to special order.

Valve suitability

Product	Steam	Water	Drinking Water	Oil	Air (Oil Free)	Gas (Inert)	Gas (Combustible)	Gas (Corrosive)	Gas (Oxygen)
1802	x	✓	✓	✓	x	x	x	x	x


The fluid to be transported is limited to Group 2 liquids i.e. non-hazardous and on no account should these valves be used for any Group 2 Gases, Group 1 Liquids or Group 1 Gases.


Max. working parameters

1802	Temperature °C	Pressure bar	Pressure psi
Water	-10 to +100	16	230

Specification clauses:

- Brass body.
- Brass screw in cap.
- Stainless Steel SS304 screen, density 350 holes per square inch.
- Test pressure 24 bar hydraulic.
- End connections, female taper threads to EN 10226-2 (ISO 7-1).
- WRAS approved for drinking water applications.

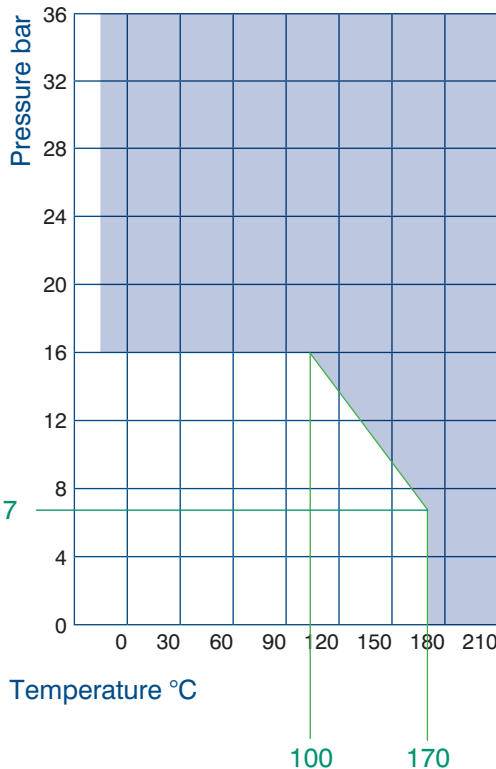

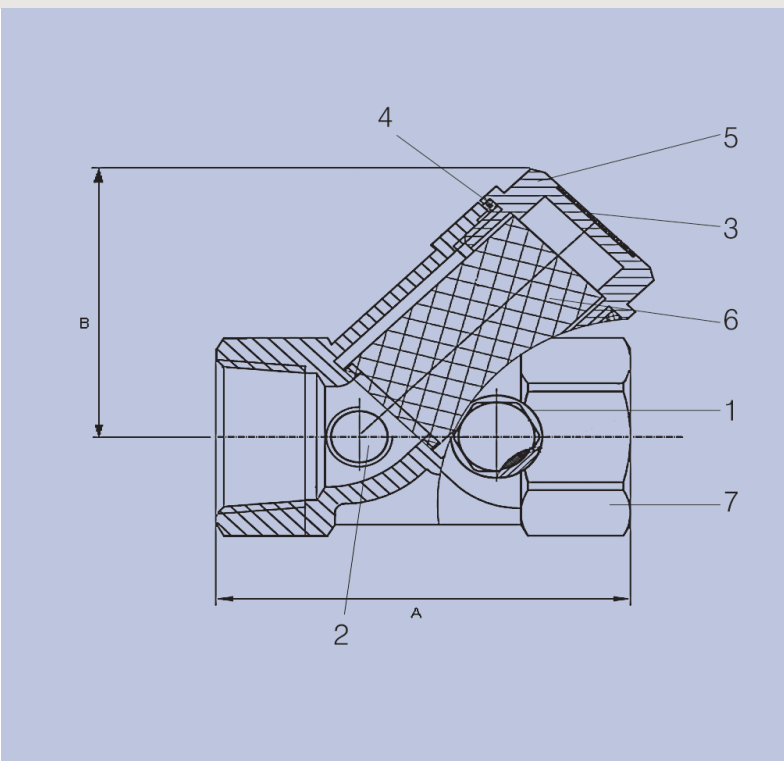

Valve range

1804 Y-Pattern Strainer - PN16 - (Bronze)

Material specification

1804 - 1/2" - 4"

No	Component	Material	Specification
1	O-ring	EPDM	EN 2430:1995
2	Blanking Plugs*	DZR Brass	EN 12164 CW602N
3	Rating Disc	Aluminium	EN 1706 LM6
4	Washer	PTFE	PTFE
5	Cap	Bronze	EN 1982 CC491K
6	Screen	Stainless Steel	ISO.15510
7	Body	Bronze	EN 1982 CC491K

*Drilled and tapped bosses to special order.

Features and benefits:

- Streamlined design in order to minimise pressure drop.
- Available with drilled and tapped bosses to special order.
- Suitable for low temperature hot water and chilled systems.
- Bronze body with streamlined internal contour to minimise pressure drop across valve.
- End connections, female taper threads to EN 10226-2 (ISO 7-1).
- Stainless steel mesh, density 350 holes per square inch.
- WRAS approved for drinking water applications.

Y-Pattern Strainer - 1804

Order Code BS EN 10226-2 (ISO 7-1) thread	Size	DN	A	B	Kv Value	Weight (kg)
180420RR0160404	1/2"	15	65	42	2.35	0.21
180420RR0160606	3/4"	20	75	50	3.3	0.32
180420RR0160808	1"	25	90	56	6.5	0.48
180420RR0161010	1 1/4"	32	110	65	11	0.76
180420RR0161212	1 1/2"	40	120	75	13.5	1.00
180420RR0161616	2"	50	135	90	15.6	1.61
180420RR0162020*	2 1/2"	65	-	-	-	-
180420RR0162424*	3"	80	-	-	-	-
180420RR0163232*	4"	100	-	-	-	-

*Valves available to special order

Valve suitability

Product	Steam	Water	Drinking Water	Oil	Air (Oil Free)	Gas (Inert)	Gas (Combustible)	Gas (Corrosive)	Gas (Oxygen)
1804	x	✓	✓	✓	x	x	x	x	x


The fluid to be transported is limited to Group 2 liquids i.e. non-hazardous and on no account should these valves be used for any Group 2 Gases, Group 1 Liquids or Group 1 Gases.

Max. working parameters

1804	Temperature °C	Pressure bar	Pressure psi
Water	-10 to +100	16	230

Specification clauses:

- Bronze body.
- Bronze screw in cap.
- Stainless steel SS304 screen, density 350 holes per square inch.
- End connections, female taper threads to EN 10226-2 (ISO 7-1).
- WRAS approved for drinking water applications.
- Suitable for low temperature hot water and chilled systems.

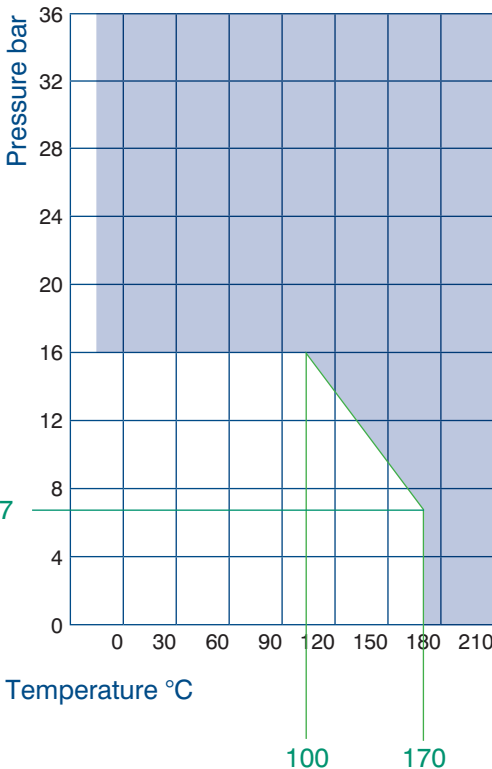

Conex | Bänninger



Conex Bänninger Conex Compression	Conex Bänninger >B< Press	Conex Bänninger >B< Press Carbon	Conex Bänninger Push-Fit	Conex Bänninger >B< Oyster	Conex Bänninger Series 3000
Conex Bänninger Triflow Solder Ring	Conex Bänninger >B< Press Gas	Conex Bänninger >B< Press Inox	Conex Bänninger Cuprofit	Conex Bänninger Medical Gas	Conex Bänninger Series 8000
Conex Bänninger Delcop End Feed	Conex Bänninger >B< Press Solar	Conex Bänninger >B< Flex	Conex Bänninger K65®	Conex Bänninger OEM	Conex Bänninger Series 8000 M
Conex Bänninger Delbraz	Conex Bänninger >B< Press XL	Conex Bänninger >B< Push	Conex Bänninger Valves	Conex Bänninger >B< ACR	



United Kingdom
Conex Universal Limited

Germany
IBP GmbH

Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: salesuk@ibpgroup.com | Website: www.conexbanninger.com

Spain/France
IBP Atcosa SL

Italy
IBP Banninger Italia srl

Poland Sales, Marketing and Logistics
IBP Instalittings Sp z o.o.

China
IBP China

The content of this publication is for general information only. It is the user's responsibility to determine suitability of any product for the purpose intended and reference should be made to our Technical Department if clarification is required. In the interests of technical development we reserve the right to change specification, design and materials without notice.

Conex Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: technical@ibpgroup.com. IBP trademarks are registered in numerous countries.