




An innovative press system which provides a secure fitting for gas applications.







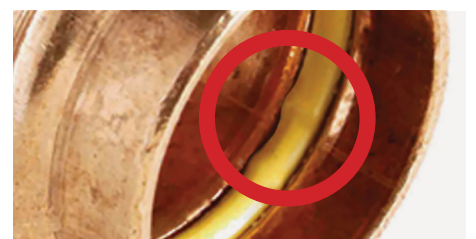











Features and benefits:

- Available in copper and red brass fittings.
- Flame-free installation for ensuring on site safety.
- >B< Profile 3-point press ensures a leak-free, secure and permanent joint.
- Quick and simple to install, saving time and money.
- Available in 15 mm to 54 mm.
- Compatible with various press tools and jaws.*
- Suitable for use with hard, half-hard and soft copper tubes to EN 1057.
- Manufactured and designed to EN 8537 copper tube press fittings.
- Designed for hydrostatic water pressure up to 16 bar.

*Please see compatibility list on website for more details



>B<Press Gas range

Straight Coupler  PG1 (P5270) From: 15 mm To: 54 mm	Slip Coupler  PG1S (P4275) From: 15 mm To: 54 mm	Female Straight Connector  PG2 (P4270G) From: 15 x 1/2" To: 54 x 2"	Male Straight Connector  PG3 (P4243G) From: 15 x 1/2" To: 54 x 2"	Fitting Reducer  PG6 (P5243) From: 22 x 15 mm To: 54 x 42 mm
90° Elbow  PG12 (PC5002) From: 12 mm To: 108 mm	90° Street Elbow  PG12S (P4001G) From: 15 mm To: 54 mm	90° Bend with Male Thread  PG13 (P4001G) From: 15 x 1/2" To: 54 x 2"	90° Elbow with Female Thread  PG14 (P4090G) From: 15 x 1/2" To: 54 x 2"	45° Obtuse Elbow  PG21 (P5041) From: 15 mm To: 54 mm
45° Obtuse Elbow  PG21S (P5040) From: 15 mm To: 54 mm	90° Street Bend  PG21S (P5001) From: 15 mm To: 108 mm	45° Obtuse Street Elbow  PG24 (P5130) From: 15 mm To: 54 mm	Tee Reduced Branch  PG25 (P5130) From: 22 x 15 x 22 mm To: 54 x 42 x 54 mm	Tee Reduced End  PG26 (P5130) From: 22 x 15 x 22 mm To: 28 x 22 x 28 mm
Tee Reduced End & Branch  PG27 (P5130) From: 22 x 15 x 15 mm To: 54 x 42 x 42 mm	Tee Reduced End & Branch  PG30 (P4130) From: 15 x 1/2 x 15 mm To: 54 x 1/2 x 42 mm	Stop End  PG61 (P5301) From: 15 mm To: 108 mm		

*Conex|Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: technical@ibpgroup.com.

Conex Universal Limited: Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM.
Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: sales@ibpgroup.com | Website: www.conexbanninger.com

This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.