


SCREEN VISION

**SV 3%**

**KOOLBLACK™**

SV 3% KOOLBLACK™

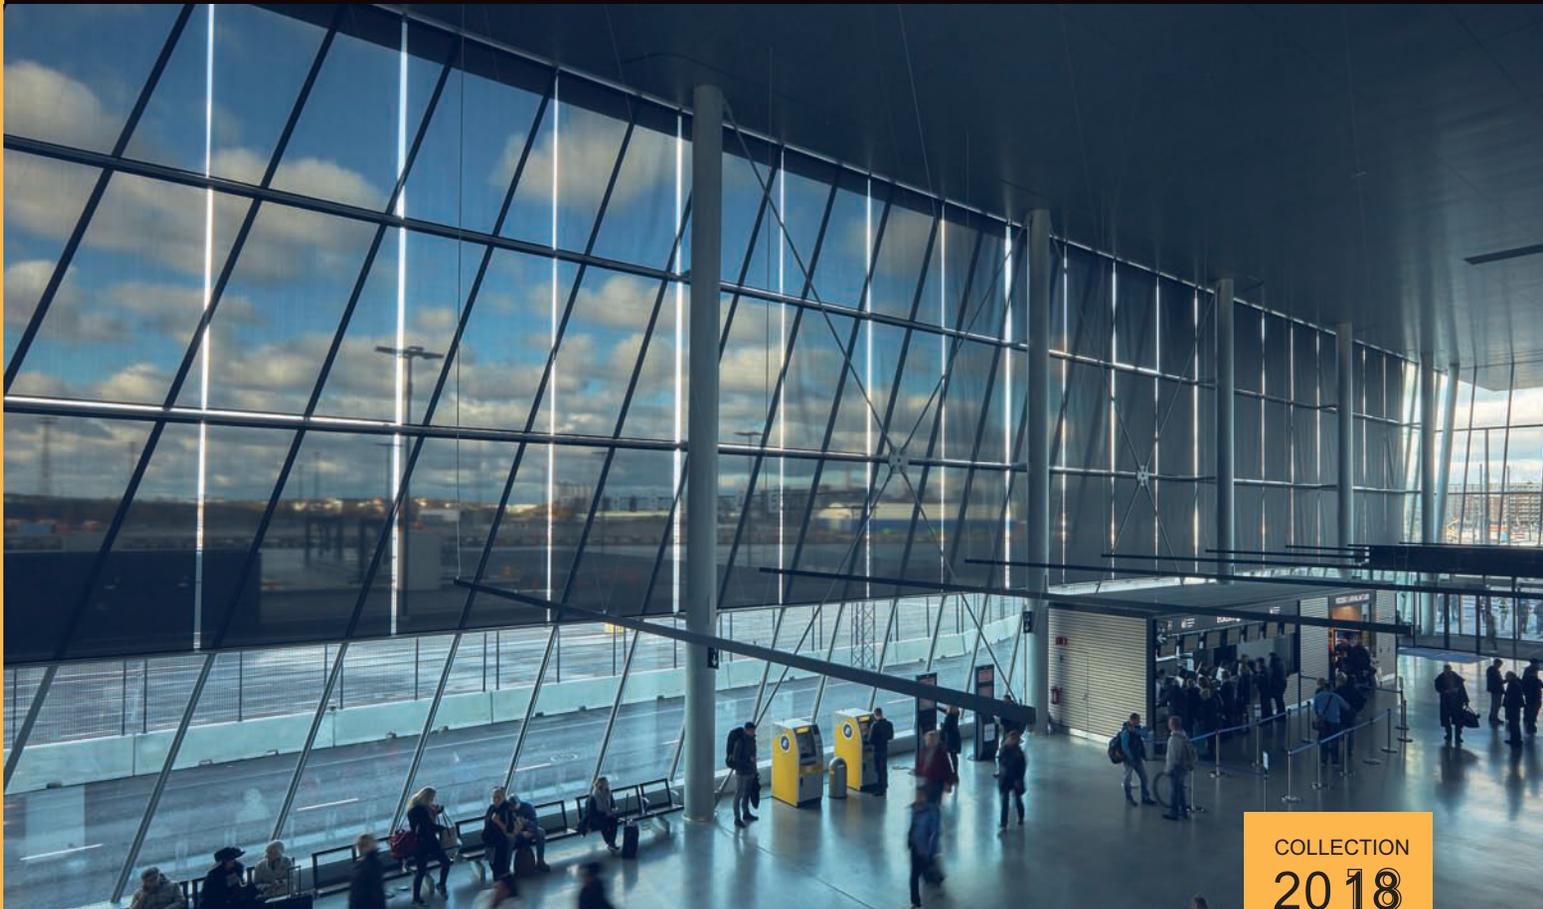

SCREEN VISION

COLLECTION  
**2018**  
**2021**

INTELLIGENT FABRICS FOR SOLAR PROTECTION



INTERNAL  
APPLICATION

[www.mermet.co.uk](http://www.mermet.co.uk)  
01989 750910  
[info@mermet.co.uk](mailto:info@mermet.co.uk)

# SV 3% KOOLBLACK™

THE FIRST DARK-COLOURED SCREEN THAT  
COMBINES VISUAL AND THERMAL COMFORT

**INVISIBLE**  
THROUGH GLASS  
FACADES

THERMAL  
**COMFORT** : 69%  
OF SOLAR RADIATION REFLECTED

■ OPTIMAL CONTROL OF INDOOR HEAT with improved solar reflectance ( $R_s = 29\%$ ), thanks to the patented KOOLBLACK technology which increases SOLAR REFLECTANCE of dark colours

■ EXCELLENT GLARE CONTROL: 95% of light rays filtered ( $T_v = 5\%$ ), comfort classification 3 (good effect) according to EN 14501 standard

■ Optimum OUTWARD VISIBILITY

■ PERFECT VISUAL INTEGRATION into the building facade when viewed from the exterior

■ EXTRA-WIDE WIDTH: 310 CM for large windows to create a seamless aesthetic

■ DIMENSIONAL STABILITY, DURABILITY (test of 10.000 cycles, class 3 NF EN 13120), MECHANICAL RESISTANCE: perfect flatness even in large dimensions

## TECHNICAL DATA

SV 3% KOOLBLACK™			
Composition	36% Fibreglass - 64% PVC		
Fire, smoke classification and other official test reports	FR (USA) - NFPA 701 BS (GB) - 5867		
Health, safety	Greenguard®: Guarantee of indoor air quality (VOC) Antibacterial: More than 99% of bacteria destroyed - ASTM E 2180		
Openness factor	3%		
UV screen	95%		
Width	310 cm		
Weight/m²	385 g ± 5% - ISO 2286 - 2		
Thickness	0,51 mm ± 5% - ISO 2286 - 3		
Colour Fastness to light (scale of 8)	7/8 - ISO 105 B02		
Mechanical resistance	Breaking	Tear	Folding
Warp	> 140 daN/5 cm	≥ 4 daN	≥ 20 daN/5 cm
Weft	> 130 daN/5 cm	≥ 3 daN	≥ 20 daN/5 cm
	ISO 1421	EN 1875-3	ISO 1421
Elongation (warp and weft)	< 5% - ISO 1421		
Packaging	Rolls of 27 lm		
Making up	Advice note on request		

This product's technical data are in conformity with this brochure as of the date of publication. MERMET SAS reserves the right to change the technical data; only those provided on the company's website [www.sunscreen-mermet.com](http://www.sunscreen-mermet.com) shall be deemed to be authentic. Where applicable, MERMET SAS also reserves the right to withdraw this product from sale should any of the technical properties or characteristics set out above prove to be inadequate or rendered impossible as a result of a change in regulations or in knowledge or understanding. Reports available on request, please contact Mermet Internal procedure derived from ISO 1421 standard

# SV 3% KOOLBLACK™



3535

Colours may be slightly different from the actual ones

WIDTH: 310 CM

## THERMAL AND OPTICAL FACTORS according to the European standard EN 14501

SV 3% KOOLBLACK™ OF 3%	Thermal factors					Optical factors
	Fabric			Fabric + Glazing / gtot internal blind		Tv
Colour	Ts	Rs	As	C : gv = 0,59	D : gv = 0,32	
3535 Charcoal	13	29	58	0,51 <span style="color: red;">①</span>	0,31 <span style="color: red;">②</span>	5

gv = 0,59: Solar factor of standard glazing (C), low-emission 4/16/4 double glazing filled with Argon (U value thermal transmittance = 1,2 W/m²K).

gv = 0,32: Solar factor of standard glazing (D), reflecting low-emission 4/16/4 double glazing filled with Argon (U value thermal transmittance = 1,1 W/m²K).

Classification according to EN 14501 standard: ① very little effect ② little effect ③ moderate effect ④ good effect ⑤ very good effect

Samples tested according to EN 14500 standard defining the measurements and calculation methods as specified in the standard EN 13363-2 "Solar protection devices combined with glazing calculation of solar and light transmittance - part 2: EN 13363-2 detailed method" and EN 410 "Glass in building - Determination of luminous and solar characteristics of glazing".

### SERVICE


- Calculation of solar factor gtot (glazing + blind)
- Spectral values and thermal & optical factors available on request
- Specification sheet
- A4 samples and prototypes
- Training on fabrics functionality

# SV 3% KOOLBLACK<sup>®</sup>

3535



## INTERNAL APPLICATIONS

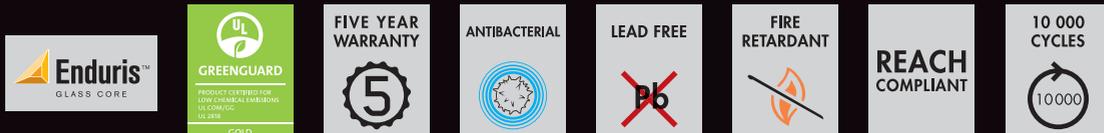


# KOOLBLACK™ TECHNOLOGY: TRANSPARENT THERMAL PROTECTION


## What is KOOLBLACK™ Technology ?

KOOLBLACK™ Technology is a patented technology that enhances dark coloured yarn's energy reflectivity by increasing its near infrared reflection (NIR). While conventional dark screen fabric provides superior view through and exceptional glare control, it absorbs the energy that is created by near infrared wavelength. KOOLBLACK™ Technology enables the fabric to reflect more solar heat, therefore, absorb less energy.

### CONVENTIONAL DARK SCREEN FABRIC

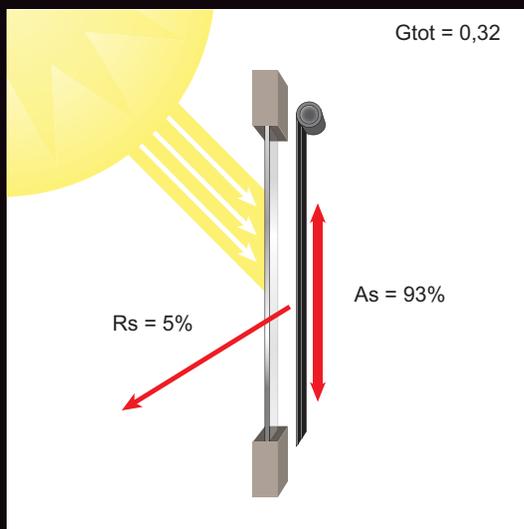

### SV 3% KOOLBLACK™ TECHNOLOGY FABRIC COLOUR CHARCOAL

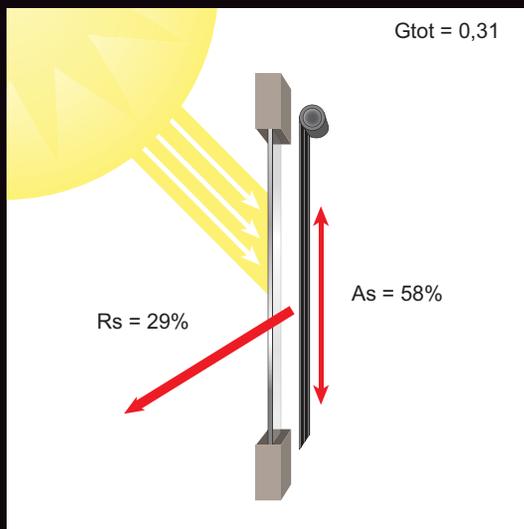


Rs: Solar reflectance      As: Solar absorbance  
Gtot: Solar factor, fabric + glazing

## KOOLBLACK™ Technology at Work


KOOLBLACK™ Technology increases the energy efficiency of dark solar shade fabrics to the levels comparable with light colours ! Only dark solar shade fabrics with KOOLBLACK™ Technology provide exceptional glare control, comfortable view through and elegant streetside aesthetics while reducing heat.

### CONVENTIONAL DARK SCREEN FABRIC - 57.8° C

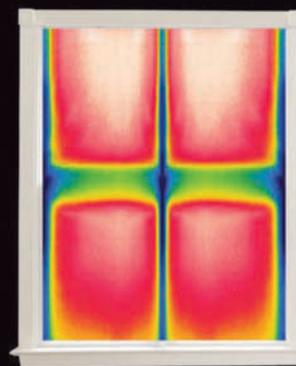

Superior view through  
Exceptional glare control  
Coordinated exterior building design


### SV 3% KOOLBLACK™ TECHNOLOGY FABRIC - 47.8° C COLOUR CHARCOAL

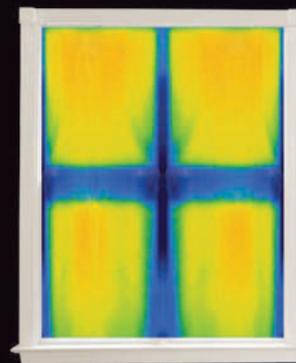

Superior view through  
Exceptional glare control  
Coordinated exterior building design  
IMPROVED HEAT CONTROL  
INCREASED ENERGY SAVINGS

(East facing window 10:00 am SC USA in April)


[www.mermet.co.uk](http://www.mermet.co.uk)

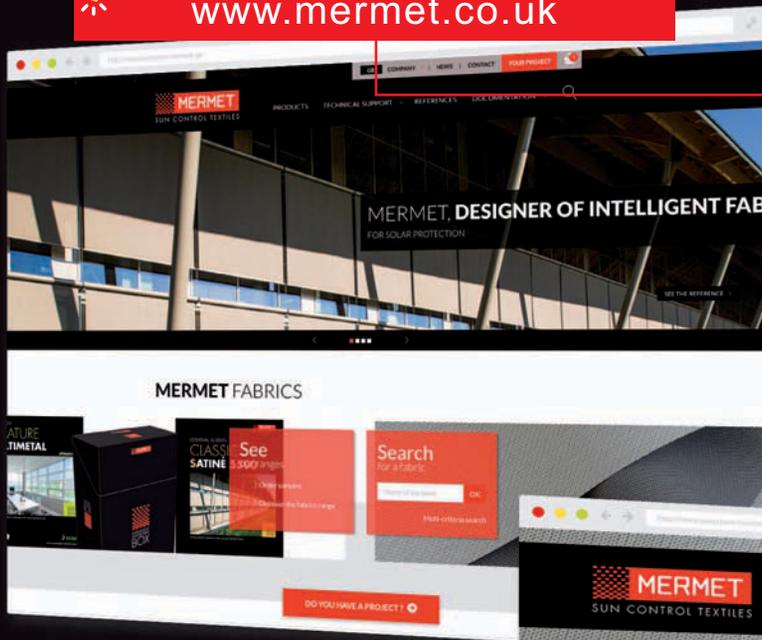

## FIND IN 3 CLICKS THE FABRIC BEST SUITED to your project

- A search engine with performances criteria
- Many documents for download
- All products information available
- A library of references

Go directly to the  
products catalog >

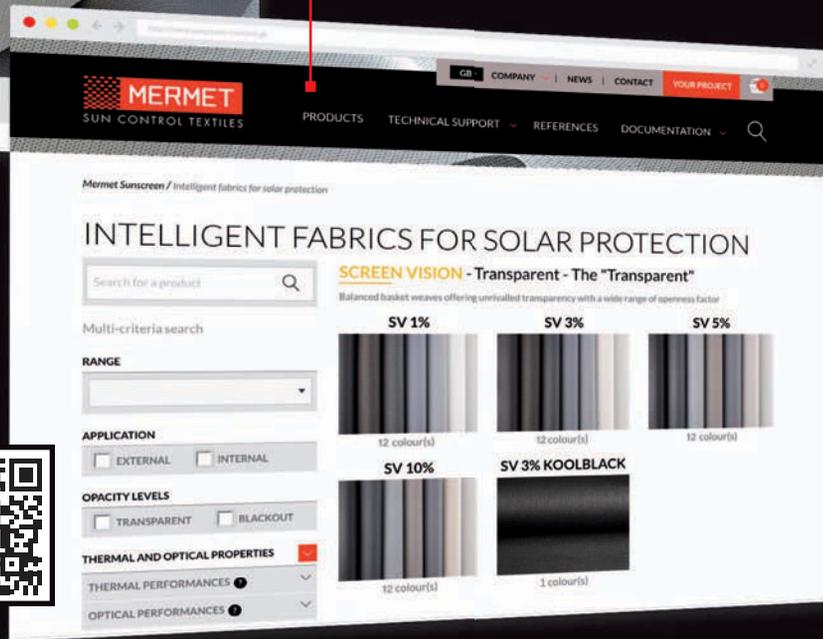

**MERMET COLLECTION** offers a wide choice of fabrics for external and internal application, from transparency to total darkness, for thermal and optical comfort. To receive other brochures from the collection, contact us

SCREEN VISION / DESIGN / THERMIC / LOW

EXTERNAL SCREEN CLAS

SCREEN NA

BLACKOUT 100 %

ACOUSTIC



**MERMET U.K. Ryeford Hall, Ryeford, Ross-on-Wye HR9 7PU**  
Phone 01989 - 750910 Fax 01989 750768 [info@mermet.co.uk](mailto:info@mermet.co.uk)

This brochure must be read and interpreted in accordance with the General Terms & Conditions of Sale of MERMET SAS, with which it forms an indissoluble whole. The General Terms & Conditions of Sale that are current at any time are those contained on the MERMET SAS website at the following address: [www.sunscreen-mermet.com](http://www.sunscreen-mermet.com).