

Main Features

Stainless steel, hermetically tight solder version

- High connection strength
- High corrosion resistance
- Capillary tube joints of high strength and vibration resistance

Bimetal connections

- Straightforward and fast soldering (no wet cloth or refrigeration pliers required).

Laser-welded **power element** in stainless steel

- Longer diaphragm life
- High pressure tolerance and working pressure
- High corrosion resistance


Compact design

- Small dimensions and low weight

Can be supplied with **MOP**

(Maximum Operating Pressure)

- Protects the compressor motor against excessive evaporating pressure during normal operation

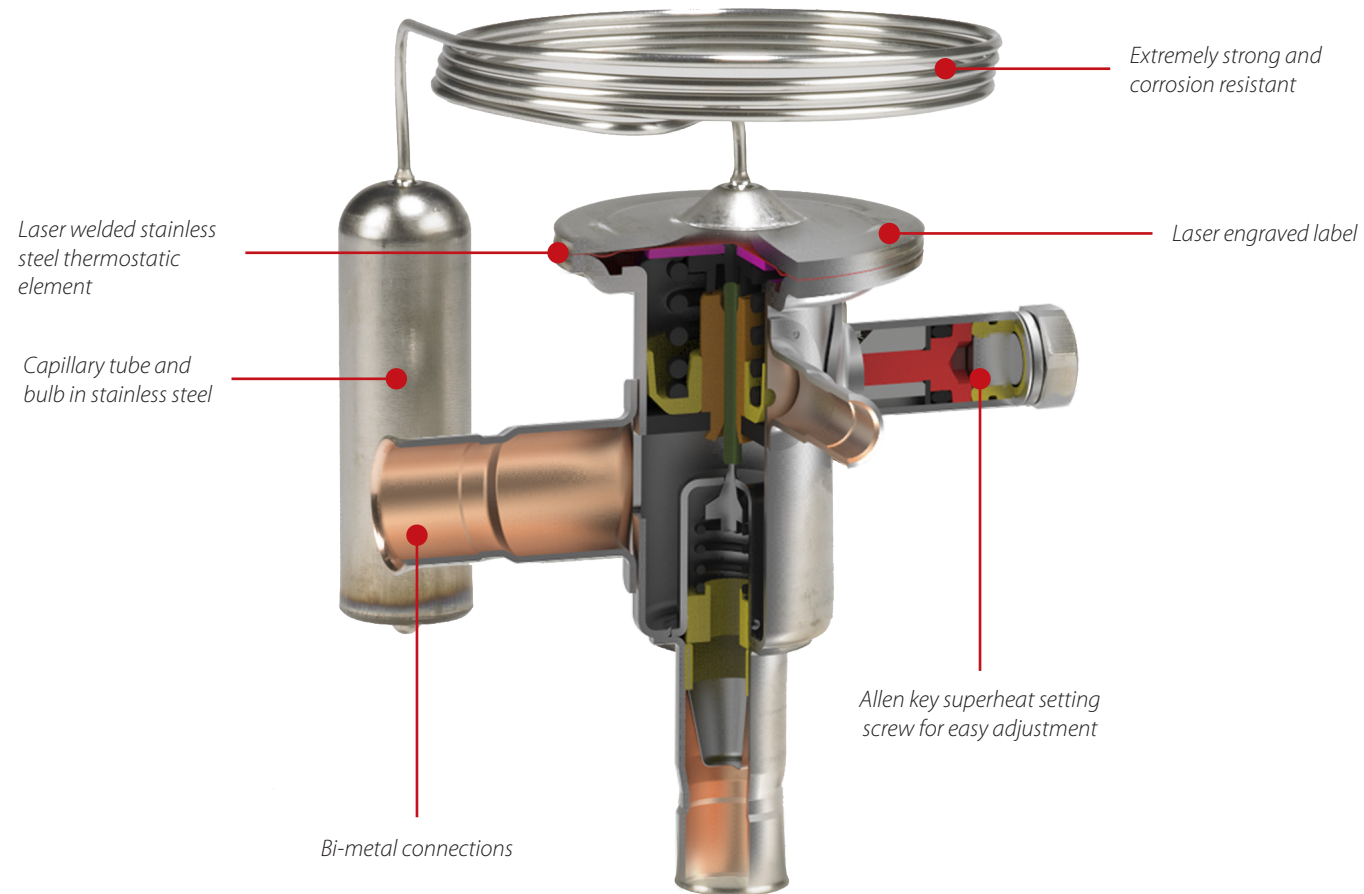

TUBE Thermostatic Expansion Valve



For more information, please check
Coolselector.danfoss.com

Learn more at ra.danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

AD135086437198en-000601


© Danfoss | DCS (az) | 2022.02

Achieve the highest precision flow control - regardless of the system conditions

Wide range of thermostatic expansion valves

Future proof

Qualified for
A2L and natural
refrigerants

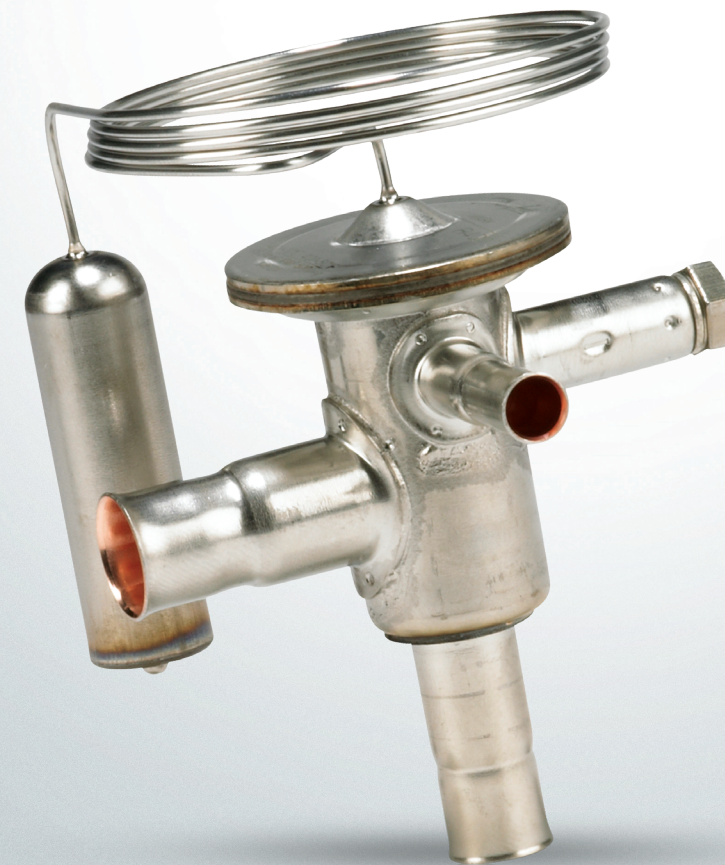

Choose the optimum solution



		Type	TD1 series		T2 series		TUA series		TUB series		TCAE		TCBE		TR6 ⁽⁵⁾		TGE series		TE 5 - TE 55 series			
			• Designed for small applications • Wide temperature range		• Standard valve for multiple applications		• Compact design and light weight • With steel / copper bi-metal connections for fast soldering				• Compact design and light weight • With steel / copper bi-metal connections for fast soldering				• Compact design and light weight • With steel / copper bi-metal connections for fast soldering		• With dual diaphragm for long lifetime		• Supplied as Parts programme - element, orifice and valve body			
Main applications		A/C Systems																				
		Transport Refrigeration																				
		Display Cabinets																				
		Ice Making Machine																				
		Water Chiller																				
		Cold Room																				
		Heat Pumps																				
Main Charac- teristics (sub types)	Orifice type		Fixed		Exchangeable		Exchangeable		Fixed		Exchangeable		Fixed		Fixed		Fixed		Exchangeable			
	Superheat		Fixed / Adjustable		Adjustable		Adjustable		Adjustable		Adjustable		Adjustable		Adjustable		Adjustable		Adjustable			
	Equalisation		Internal • TD 1	External • TDE 1	Internal • T2	External • TE2	Internal • TUA	External • TUA E	Internal • TUB	External • TUBE	External		External		External		External		External			
	Max. working pressure (PS)		34 bar		34 bar		34 bar (R410A: 45.5 bar)		34 bar (R410A: 4.5 bar)		34 bar (R410A: 45.5 bar)		34 bar (R410A: 45.5 bar)		45.5 bar		46 bar		28 bar			
Technical Specifications	Capacity for:	R134a/ R513A	0.4 – 3.8 kW • 0.1 – 1.1 TR		0.5 – 8.6 kW • 0.1 – 2.5 TR ⁽²⁾		0.2 – 7.7 kW • 0.1 – 2.2 TR ⁽²⁾				7.7 – 16.5 kW • 2.2 – 4.7 TR ⁽²⁾				–		6 – 102 kW • 1.5 – 29 TR		5 – 165 kW • 1.5 – 47 TR			
		R448A/ R449A	0.9 – 6.7 kW 0.2 – 1.9 TR		0.9 – 19.8 kW • 0.2 – 5.7 TR ⁽³⁾ 0.8 – 19.1 kW • 0.2 – 5.5 TR ⁽⁴⁾		0.4 – 13.9 kW • 0.1 – 4.1 TR ⁽³⁾ 0.4 – 13.6 kW • 0.1 – 4.2 TR ⁽⁴⁾				17.6 – 25.1 kW • 5.1 – 7.4 TR ⁽³⁾ 16.9 – 23.9 kW • 4.9 – 7 TR ⁽⁴⁾				–		–		9 – 225 kW 2.5 – 64 TR			
		R452A	0.7 – 5.6 kW • 0.2 – 1.6 TR		0.6 – 15.8 kW • 0.2 – 4.4 TR		0.2 – 7.2 kW • 0.1 – 2.1 TR				12.6 – 18.1 kW • 3.6 – 5.2 TR				–		–		7 – 172 kW • 2 – 49 TR			
		R407C	0.5 – 5.3 kW • 0.1 – 1.5 TR		0.9 – 19.7 kW • 0.2 – 5.6 TR		0.4 – 14 kW • 0.1 – 3.9 TR		0.4 – 13.9 kW • 0.1 – 3.9 TR		17.8 – 25.3 kW • 5.0 – 7.1 TR		17.8 – 25.3 kW • 5.07 – 7.1 TR		10.6 – 24.6 kW • 3 – 7 TR		9 – 148 kW • 2.5 – 42 TR		11 – 232 kW • 3 – 66 TR			
		R404A	0.4 – 4.2 kW • 0.1 – 1.2 TR		–		–		–		–		–		–		7 – 105 kW • 2 – 30 TR		7 – 183 kW • 2 – 52 TR			
		R1234yf	Not Approved		0.5 – 7.3 kW • 0.1 – 2.1 TR		0.3 – 6.6 kW • 0.1 – 1.9 TR				–				–		Not Approved		5.6 – 24.8 kW • 1.6 – 7.1 TR ⁽¹⁾			
		R454C	Not Approved		0.8 – 14.8 kW • 0.2 – 4.2 TR		0.5 – 11.2 kW • 0.1 – 3.2 TR				–				–		Not Approved		9.1 – 40.7 kW • 2.6 – 11.6 TR ⁽¹⁾			
		R455A	⁽⁶⁾		0.9 – 18.3 kW • 0.2 – 5.2 TR		0.5 – 12.9 kW • 0.1 – 3.7 TR				–				–		Not Approved		10.3 – 46.1 kW • 2.9 – 13.1 TR ⁽¹⁾			
		R410A	–		–		–		–		–		–		–		12 – 182 kW • 3.5 – 52 TR		–			
		R452B	–		–		–		–		–		–		–		12 – 208 kW • 3.5 – 59 TR		–			
		R454B	–		–		–		–		–		–		–		14 – 229 kW • 4 – 65 TR		–			
		R290	0.6 – 5.6 kW • 0.16 – 1.6 TR		Not Approved		0.49 – 27.9 kW • 0.14 – 7.9 TR				–		–		–		10 – 152 kW • 3 – 43 TR		Not Approved			
	Standard temperature ranges available			-40 – 10 °C		-40 – 10 °C		-40 – 10 °C		-40 – 10 °C		-40 – 10 °C		-40 – 10 °C		-10 – 15 °C		-40 – 10 °C		-40 – 10 °C		
				–		-40 – -5 °C		-		-40 – -5 °C		-		-40 – -5 °C		–		–		-40 – -5 °C		
				–		-40 – -15 °C		-40 – -15 °C		-40 – -15 °C		-40 – -15 °C		-40 – -15 °C		–		–		-40 – -15 °C		
				–		-60 – -25 °C		-60 – -25 °C		-60 – -25 °C		-60 – -25 °C		-60 – -25 °C		–		–		-60 – -25 °C		
				-25 – 10 °C		–		–		–		–		–		–		-25 – 10 °C		–		
				–		–		–		–		–		–		–		-30 – 15 °C		–		
				-25 – 15 °C		–		–		–		–		–		–		–		–		
	Valve body configuration		Angleway / Straightway		Angleway		Straightway		Angleway / Straightway		Straightway		Straightway		Straightway		Straightway		Straightway		Angleway / Straightway	
	Connections		Copper solder		SAE Flare / Copper solder		Bi-metal solder		Bi-metal solder		Bi-metal solder		Bi-metal solder		Copper solder / Flare / Threaded version		Copper solder / Flare / MIO / ORFS		Brass solder / Flange / Flare			
	Approvals		UL (angleway only)		GOST / EAC		GOST		GOST		GOST		GOST		UL • GOST		UL • GOST		GOST			
Materials	Element		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel			
	Valve body		Brass		Brass		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Brass		Brass		Brass			
	Bulb and capillary tube		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel		Stainless steel			

⁽¹⁾ Capacity data is only for TE 5 ⁽²⁾ Capacities are for R513A only ⁽³⁾ Capacities are for R448A only ⁽⁴⁾ Capacities are for R449A only

⁽⁵⁾ TR6 is for North America only ⁽⁶⁾ Approved but capacity data not available yet