

HEXPARKET PRODUCT INFORMATION

Hexparket

Junkers Hexparket is produced as untreated hexagonal tiles in 3 separate pieces, see fig. 1.

Each tile is provided with a groove on all sides. Delivered with loose tongues, 180 mm of length.

Nominal Board Dimensions:

Thickness: 20.5 mm (± 0.2 mm)

Size: 370 x 370 x 370 mm (± 0.2 mm)

Drying Methods: Kiln dried.

Moisture Content:

Oak: 8 % (± 2 %)

Black Oak: 9% (± 2 %)

Precision Engineering:

Landing Deviation: 0.4 mm.

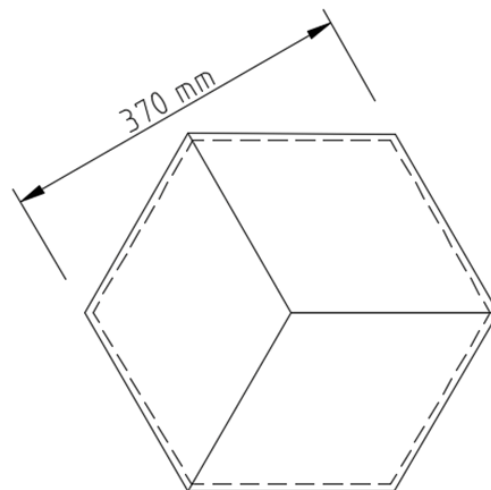


Fig. 1

TECHNICAL PROPERTIES

Resistance to Indentation: 3.4 Hardness Brinell

Fire Classification: D_{fl} – S₁ (DIN EN 13501-1: 2002)

Thermal Conduction: (Transmission Coefficient):

Approx. 0,17 W/mK

Heat Resistance: Approx. 0.12 m² K/W

Surface: Final sanding to grit 150

PRODUCT RANGE

Wood Species	Tile size [mm]	Grade	Surface
Oak Black Oak	20.5 x 370 x 370 x 370	Harmony	Untreated

PACKING AND WEIGHT

The tiles are wrapped in polythene.

Tiles / m ²	Tiles / pack	m ² / pack	Kg / pack
8.44	8	0.95	14