

BUSHINGS PRODUCT INFORMATION




GENERAL DESCRIPTION

Junckers Bushings are removable access covers designed to be installed as a flush fitting in sports floors.

They are ideally suited to provide access to post hole sockets for a wide range of sports requirements.

A rubber suction cup for easy removal of Bushing Covers is also available from Junckers.

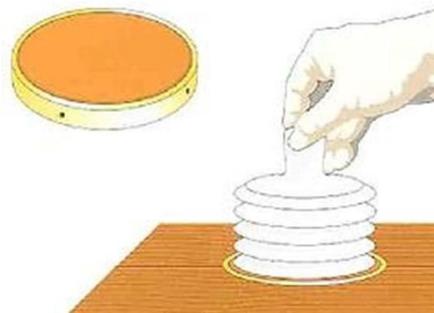

TECHNICAL DATA

| Sizes | Diameter [mm] | Free Hole Size [mm] | Thickness [mm] |
|----------------------|---|---------------------|----------------|
| | 95 | 75 | 20 |
| | 126 | 106 | 20 |
| | 170 | 150 | 20 |
| Frame | Available in the colour brass, predrilled with four screw holes. | | |
| Bushing Cover | Available in veneered Beech plywood with five spring-loaded catches for secure fixing. Also available in maple, ash and beech sylvaket on request. | | |

Using a template and a router, cut a circular hole in the surface of the Junckers 22 mm thickboard to allow the Frame to sit flush.

Mark out the clear opening and cut this out of the board to give access to below the floor.

Screw the frame to the edge of the board using No. 6 cs/k wood screws. The cover sits in the frame and is held in place by spring loaded catches. Use the rubber Suction Cup to remove the cover.

