

DIMENSIONS (mm)
H: 300 W: 410 D: 585

WEIGHT(kg)
176

RESISTANCE
BS 5051 G1, G2
EN 1522 FB4
BS EN 1063 BR4

CONSTRUCTION
Outer frame and external door primed ready for finishing on site. BTU is powder coated light grey vision panel and external audio cover finished in satin and polished stainless steel.

PART NUMBER
011721

WALL REQUIREMENTS
Prepared structural opening of 800mm x 1000mm with cavities closed and finished

MERIDIAN MODULE

Safetell's Meridian Module combines two of our proven products, the Stalwart Steel Door and the Bulk Transfer Unit, providing secure transfer of cash to external locations. The combination offers significant manual and ballistic attack resistance. The security vision panel allows staff to see who is on the other side of the transfer unit with the Stalwart Door offering increased vandal and weather resistance.

MAIN FEATURES

- The external door can either be opened by an authorised key holder or by the courier alerting staff by the call button/microphone
- Transfer capacity 70ltrs
- With the external door open, the internal staff control the access of the electronically controlled Bulk Transfer Unit
- Only one door of the BTU can be opened at any one time. Closing is assisted by gas springs to ensure positive latching
- Outer frame is secured into a prepared opening
- Electrical points are required for the BTU and electrical door release and intercom

OPTIONAL

- Nationwide installation if required
- If the installation position does not have sufficient wall width to support the unit, Safetell can provide an enhancement with CityWall



STAFF VIEW




CUSTOMER VIEW

**SERVICE &
MAINTENANCE
AVAILABLE**

+44 (0) 1322 223 233

sales@safetell.co.uk safetell.co.uk

TECHNICAL DRAWINGS

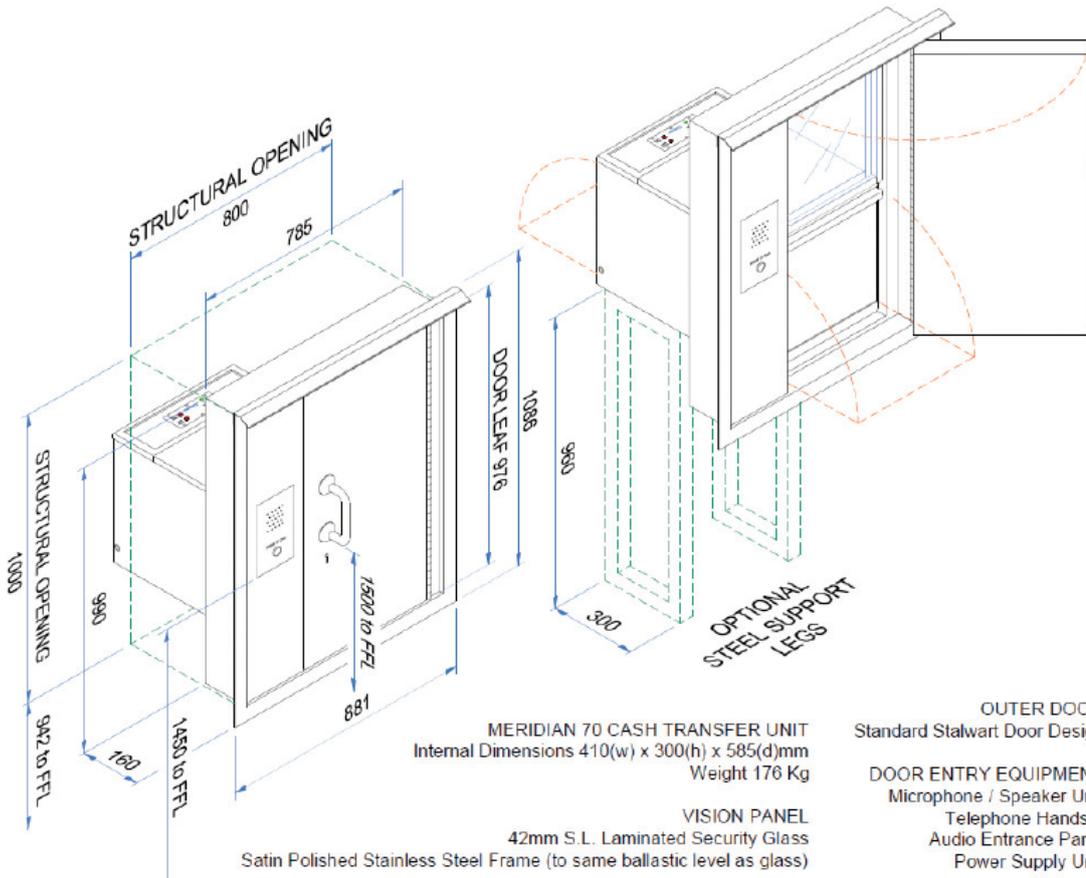

WE ARE FULLY ACCREDITED



+44 (0) 1322 223 233

