


Complete Fire Protection Ltd

Manufacturers of Intumescent Products

Surface Mounted Acoustic Door Seal – No Routing Required.

Intumescent Surface Mounted Door Seal - FSAS

2100mm Lengths - White - Brown or Black Available.

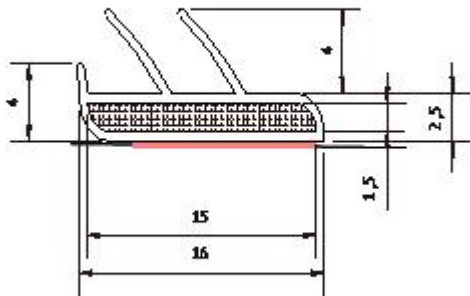

Fire Smoke & Acoustic Seal All in One.

Description

FSAS was designed primarily as a retro fit profile for upgrading existing non fire rated doors to FD30s.

This Seal also gives an added protection against noise and smoke.

It is easily fitted to the frame with little or no disruption to the door assembly and has been

Fire Tested to BS EN: 1634-1:2008.

Product Features

- Excellent compression and deflection performance
- Low closing forces due to low co-efficient material used in the integral fins
- Supplied with a high performance adhesive backing

Door Gap

A gap of **4 to 5mm** should be allowed for best result

Product Range

Available in a standard colour range of Black, White, Lt Brown(oak)

Also available in any RAL colour as a special (volume dependant)

Standard length 2.1m (other lengths available as special)

Fixing

No tools required, as the FSAS has a strong self adhesive tape, suitable for many surfaces including bare smooth wood, painted surfaces, metal and MDF.



PLEASE NOTE that ironmongery should be protected using Fireplug Hinge Strip and Lock (ref Fireplug CFPM).