

Complete Fire Protection Ltd

Manufacturers of Intumescent Products


Surface Mounted Strip – No Routing Required.

FIREPLUG Surface Mounted Strip

Description

When fire strikes, gaps around doors are a perfect escape route for the fire to travel, therefore it is crucial to halt the spread of flame and smoke by fitting Intumescent Door Seals.

- 60 minutes of fire integrity - even with a gap of 11mm at the head of the door!
- No rebating or drilling needed, these are self-adhesive and surface-mounted
- Stop fire and smoke (intumescent strip and brush seals)
- Save time and labour costs
- Only requires a minimum 4mm gap at top and closing side of door and a minimum of 4mm on the hinge side of the door
- Seals provided:
 - 2 x FP102 1mm thick strips for fitting to the hinge jamb
 - 3 x FP202 2mm thick strips for fitting to closing lock jamb and door head
- Available in white or brown
- Available in sets for single or double doors
- Can be fitted directly over hinges with no hinge binding
- Independently tested to BS 476-22:1987

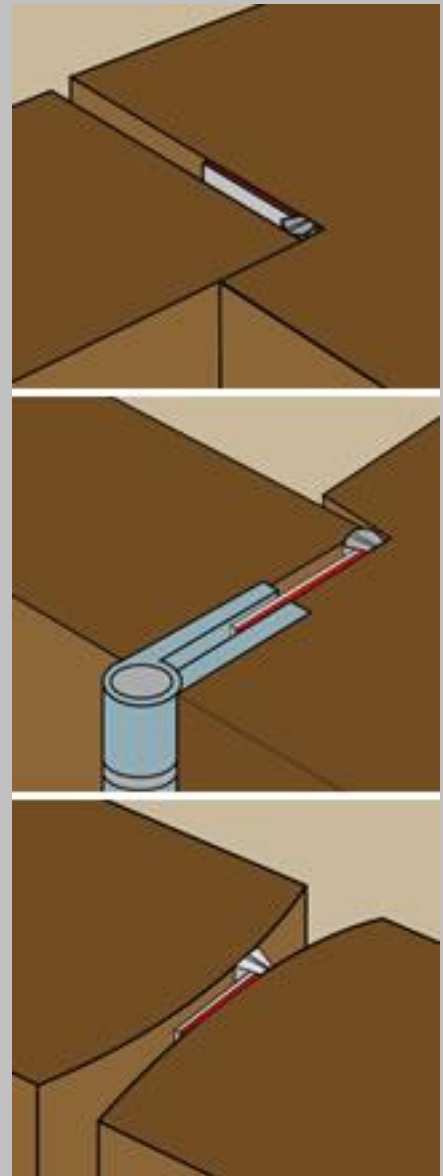

PLEASE NOTE that ironmongery should be protected using Fireplug Hinge Strip and Lock (ref Fireplug CFPM).