
## **Eastern White Pine**



## for millwork applications

The Eastern White Pine, a species native to Quebec, is the tallest conifer in eastern Canada. Its wood is the least resinous of all pines. It is a fast-growing tree, sometimes reaching heights of 90 metres and diameters of 250 centimetres. With its uniform

texture, Eastern White Pine is used for mouldings, cabinetwork, doors, windows, siding, panelling and do-it-yourself (DIY) projects. Its wood is tender and ranges from creamy white to yellow. It is valued for its fine grain and workability.

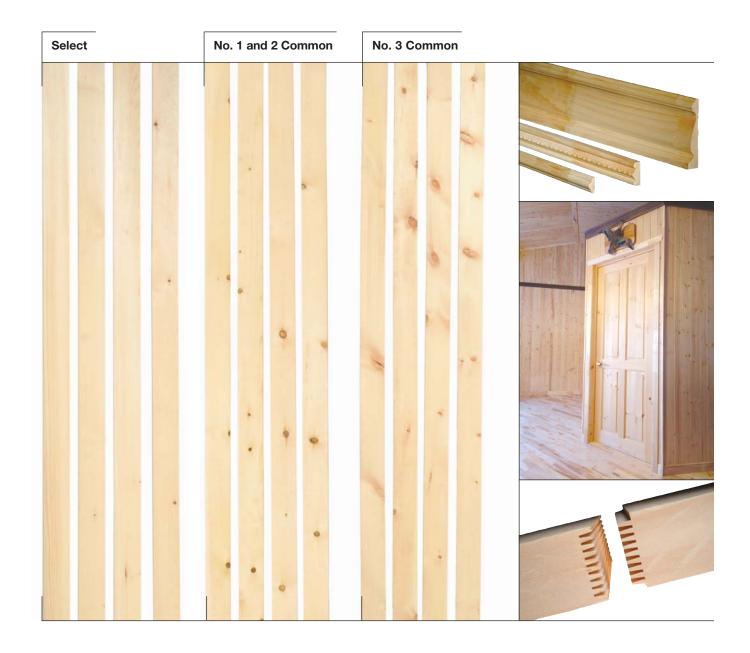

## Eastern White Pine | for millwork applications | Pinus strobus

Colour	The sapwood is white or creamy white whereas the hardwood ranges from pale yellow to pale or reddish brown.				
Texture	The wood grain is generally regular. Its texture is medium and uniform.				
Common usage	No. 1 and 2 Common: Grade Panelling, framing, edge trim,	soffit, doors, windows and DIY ma	and tight knots and wood that is naturally light in colour.		

		Eastern White Pine	Red Pine	Jack Pine	Scots Pine	Southern Yellow Pine	Suger maple	Yellow Birch
		Pinus Strobus	Pinus resinosa	Pinus banksiana	Pinus sylvestris	Pinus palustris	Acer saccharum	Betula alleghaniensis
erties	Density (kg/m³)	368 <sup>1</sup>	401 <sup>1</sup>	444 <sup>1</sup>	512 <sup>2</sup>	657 <sup>2</sup>	659 <sup>1</sup>	608 <sup>1</sup>
Physical Properties	Modulus of rup- ture (kiln-dried) MOR (Mpa)	65 <sup>1</sup>	70 <sup>1</sup>	78 <sup>1</sup>	84 <sup>2</sup>	97 <sup>2</sup>	115 <sup>1</sup>	106 <sup>1</sup>
Physic	Modulus of elasticity MOE (Mpa)	9380 <sup>1</sup>	9 450 <sup>1</sup>	10 200 <sup>1</sup>	10 100 <sup>2</sup>	13500 <sup>2</sup>	14 100 <sup>1</sup>	14 100
	Hardness Jenka (N)	1650 <sup>1</sup>	2120 <sup>1</sup>	2560 <sup>1</sup>	N/A	N/A	7 290 <sup>1</sup>	5 930 <sup>1</sup>
	Dimensional shrinkage	8%	11 %	10%	7%	12%	14%	17%
ies	Machinability	****	***	***	**	***	****	****
Properties	Stability	**			***	**	**	**
	Gluing	***	**	****	***	***	**	**
Morking	Nailability	**	****	***	***	***	**	**
Wol	Mortising	**	**	**	**	***	***	**
	Turning	***	**	***	**	***	**	**
	Planing	***	***	**	***	***	***	**
	Sandability	**	***	***	**	***	***	**
	Paintability	***	**	***	**	**	**	**
	Stainability	***	***	***	**	**	**	***

Excellent: ★★★★ Very good: ★★★ good: ★★ Fair: ★ N/A: Not available

1. Jessome, A.P., Strength and Related Properties of Woods Grown in Canada, Forintek Canada Corp., 1995. 2. The Wood Explorer, Version 1.0, 2001-2002.

Standard dimensions available*				
Grades	Select; No. 1 and 2 Common; No. 3 Common			
Nominal <sup>1</sup> thickness in inches (millimetres)	4/4", 5/4", 6/4", 7/4", 8/4" (25.4 mm; 31.8 mm; 38.1 mm; 44.5 mm; 50.8 mm)			
Net <sup>2</sup> thickness in inches (millimetres)	3/4", 1 1/8", 1 3/8", 1 3/4" (19 mm; 28.6 mm; 34.9 mm; 44.4 cm)			
Nominal <sup>1</sup> width in inches (millimetres)	2", 3", 4", 5", 6", 8", 10" (50.8 mm; 72.2 mm; 100 mm; 127 mm; 152.4 mm; 203 mm; 254 mm)			
Net <sup>2</sup> width in inches (millimetres)	1 1/2", 2 1/2, 3 1/2", 4 1/2", 5 1/2", 7 1/4", 9 1/4" (38 mm; 64 mm; 89 mm; 114 mm; 140 mm; 184 mm; 235 mm)			
Length in feet (metres)	6', 7', 8', 10', 12', 14', 16' (1.83 m; 2.13 m; 2.44 m; 3.05 m; 3.66 m; 4.27 m; 4.88 m)			

<sup>\*</sup> Other dimensions and grades produced are available upon request

Comparision of pine grades				
NLGA Eastern White Pine	NeLMA Eastern White Pine			
Select	D and better Select			
No. 1 Common	Finish			
No. 2 Common	Premium			
No. 3 Common	Standard			
No. 4 Common	Industrial			
No. 5 Common				

**NLGA:** National Lumber Grades Authority NeLMA: North East Lumber Manufacturers Association



Canada Wood Produits de bois canadien

Quebec Wood Export Bureau



**1** (418) 650-6385

**1** (418) 650-9011

info@quebecwoodexport.com www.quebecwoodexport.com

<sup>1.</sup> Nominal: rough lumber 2. Net: lumber planed on four sides