

GTF 150mm (6") ENERGY EFFICIENT

KEY FEATURES


- ▶ Comply with current Building Regulation requirements
- ▶ Offers a very low SFP down to 0.48 (W/l/s)
- ▶ Quiet in operation
- ▶ Style fascia to fit interior design scheme
- ▶ Reduces carbon emissions
- ▶ Suitable for kitchen and utility
- ▶ Ideal for new-build and replacement



Technical data

Description	230V
Max Extract Volume (l/s)	60
Max Extract Volume (m³/h)	216
Max Pressure (Pa)	50
Supply Frequency (Hz)	50
Specific Fan Power (W/l/s)	0.48
Max Power (W)	29/Standby 0.2
Max Sound dB(A) @ 3m	49
Weight (kg)	0.8
IP Rating	X4
Max Operating Temperature (°C)	40
Wall-Fit Hole Diameter (mm)	160
Warranty	2 yrs
Window-Fit Hole Diameter (mm)	182-192
Suitable for Glass Thickness (mm)	3-22

PERFORMANCE

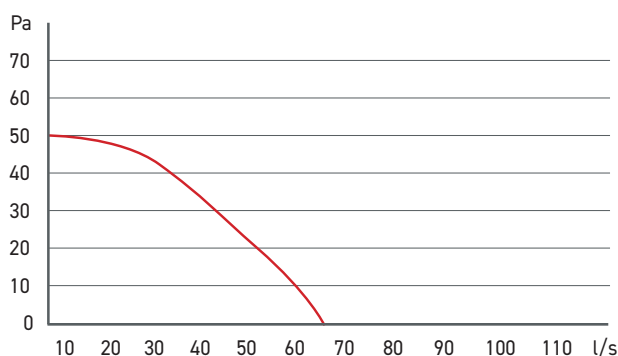


Models

Product Code	Pull Cord	Timer	Humidistat
GTF150-S			
GTF150-PC	•		
GTF150-T		•	
GTF150-H		•	•

Accessories

15W	Window fitting kit
15K	Wall fitting kit

DIMENSIONS

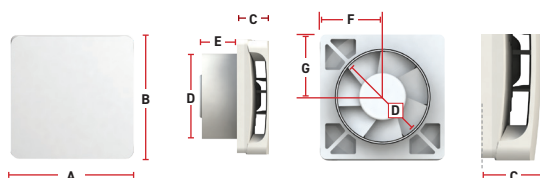

Measured in mm

A: 201 B: 201 C: 44 D: 150 E: 61 F: 100.5 G: 100.5

**YOUR
VENTILATION
SPECIALIST**

03443 715 523

www.domusventilation.co.uk

domusventilation_

