

1261.US28 Door Closer

[Standard Duty Closer w. Backcheck, Plastic Cover - Adjustable Power Size 1-4.](#)
[Pull Side of Door, Push Side of Door or Push Side Transom. Silver w. Matching Arm](#)

Best suited to standard duty situations on perimeter and internal doors where a medium level of traffic is anticipated. The 1261 is adjustable through spring sizes 1-4 and mounts to the most common commercial footprint. The 1260 Series also features a complete line of regular and extra duty arms and LCN's peel-n-stick installation templates.


The 1261 is LCN's most competitively priced closer designed for demanding standard duty applications.

CE/UKCA Certification applies to all applications.

Suits doors <136 kilos

- Hinge (Pull Side) Mounting
- Top Jamb (Push Side) Mounting
- Stop Face (Push Side) Mounting
- Non-handed for right and left swinging doors
- Adjustable hydraulic backcheck cushions opening swing prior to 90 degrees
- Separate regulation of general closing speed and latching speed
- Joints in arm and shoe adapt to uneven trim
- Reversible shoe to boost latching power on double lever arms
- All Weather Fluid - Performs without variation:
 - Manual Closers - between -35° to +49°C
 - Electronic HO Closers & Automatic Operators - between +2° to +49°C
 At approx. +75°C the fluid will begin to leak from the mechanism. The flash point is approx. 110°C

Hinge (Pull Side) Mounting

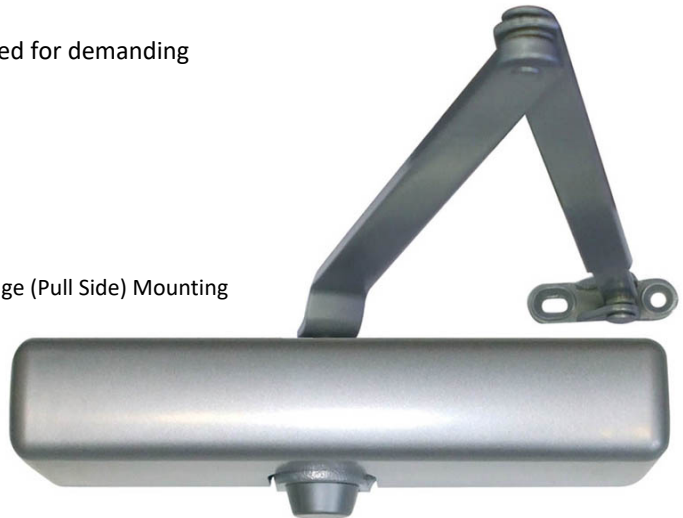

Stop Face (Push Side) Mounting



Top Jamb (Push Side) Mounting



UK Fire Certification in accordance with BS EN 1634-1:2014 (timber) - 120 mins
WFR No. 142058

EN 1154: 1996 + A1: 2002/AC:2006



[LCN 1000 Series Door Closers](#)

The LCN 1260 Series combines the best features from the previous 1070 and 1370 series into a single versatile and economical cast iron closer, with dual mounting capability.