

OBEXION ID4 INDUSTRIAL DOOR

ACCREDITATIONS

- Independently tested by the Loss Prevention Certification Board (LPCB)
- Certified to LPS 1175 Issue 8, D10 (SR4)
- Secured by Design Police Preferred Specification



CERTIFIED PROTECTION AGAINST:



Forced Entry:
Bodily Force

Mitigation of opportunist intruder attempts using manual or bodily force including tools.



Forced Entry:
Power Tools

Protecting against deliberate forced entry of premises using mechanically-enhanced power tools.



Bespoke

Securing people, property and assets against bespoke risks and severe threats.

The Obexion ID4 is an industrial door certified to LPS 1175 Issue 8, D10 (SR4) standard. It is designed to resist a sustained and experienced attempt at forced entry, using an extended range of hand and power tools.

Catering for applications where there is a severe threat to people, property or assets, the Obexion ID4 can be used for high-risk commercial buildings, critical infrastructure, government and defence buildings as well as prison, custodial and law enforcement facilities.

Thermal, acoustic and high wind resistance upgrades are available and the Obexion ID4 can be fitted with either manual or automatic locking systems.

- Galvanised steel or stainless steel curtain construction
- Polyester powder coat to any standard RAL / BS colour
- Manual or auto locking
- High or standard duty cycle motors
- Thermal insulation upgrade
- Acoustic insulation upgrade

OBEXION ID4 INDUSTRIAL DOOR

SUITABLE APPLICATIONS INCLUDE:

- High risk commercial buildings
- Government & Defence
- Critical Infrastructure
- Laboratories

APPROVED DIMENSIONS

Minimum Certified Width: 1750
Maximum Certified Width: 8000
Minimum Certified Height: 1000
Maximum Certified Height: 8000

CURTAIN

Double Wall Stainless Steel
Double Wall Galvanised Steel

BOTTOM RAIL

Reinforced steel
Weather seal

OPTIONS

- Thermal upgrade available
- Acoustic upgrade available
- High wind resistance upgrade available

FINISH


Finish as delivered: Polyester powder coated in standard RAL/BS colours

PRODUCT REFERENCE

Obexion ID4 Industrial Door

PERFORMANCE

Certified to LPS 1175 Issue 8 D10 (SR4)

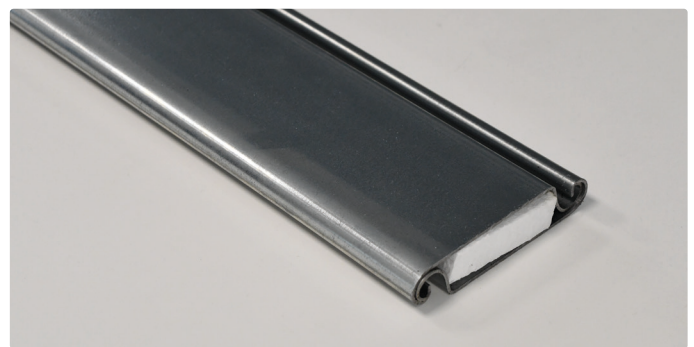

SUITABLE SUBSTRATES:

- Reinforced masonry
- Reinforced concrete
- Structural Steelwork
- Sub assembly steel framework

FRAMES/GUIDES

Two-part galvanised steel guide with rubber seals

OPERATION/LOCKING

Hold-to-run operation with manual locks
Automatic operation with electronic locks
Safety on close as assessment directs



LPS 1175 Issue 8
Cert. No. 1075f



Asse. to ISO 9001:2015
Cert./LPCB ref. 1396



Secured by Design



Police Preferred Specification