

## OBEXION ID2 INDUSTRIAL DOOR

### ACCREDITATIONS

- Independently tested by the Loss Prevention Certification Board (LPCB)
- Certified to LPS 1175 Issue 8, B3 (SR2)
- Secured by Design Police Preferred Specification



### CERTIFIED PROTECTION AGAINST:



Forced Entry:  
Bodily Force

Mitigation of opportunist intruder attempts using manual or bodily force including tools.

The Obexion ID2 is an industrial door certified to LPS 1175 Issue 8, B3 (SR2) standard. It is designed to withstand attack by a determined opportunist, using bodily force and mechanically advanced tools of medium size.

This industrial door is ideal for commercial buildings with a medium security risk, utilities buildings, as well as data and communications centres.

Optional upgrades such as thermal and acoustic insulation can be included in the specification, as well as wind resistance.

Obexion ID2 is also available as a perforated single wall version in steel, giving vision and airflow through the door.

- Aluminium, galvanised steel or stainless steel curtain construction
- Single skin steel curtain construction with full or partial perforation
- Polyester powder coated to any standard RAL/BS colour
- Manual or auto locking
- High or standard duty cycle motors
- Thermal insulation upgrade
- Acoustic insulation upgrade

## OBEXION ID2 INDUSTRIAL DOOR

### SUITABLE APPLICATIONS INCLUDE:

- Medium risk commercial buildings
- Utilities Buildings
- Data centres

### APPROVED DIMENSIONS

Minimum Certified Width: 1000  
Maximum Certified Width: 8000  
Minimum Certified Height: 1000  
Maximum Certified Height: 8000

### CURTAIN

Single Wall Aluminium  
Single Wall Galvanised Steel  
Single Wall Perforated Steel\*  
Double Wall Aluminium  
Double Wall Galvanised Steel  
Double Wall Stainless Steel

### BOTTOM RAIL

Extruded aluminium  
Reinforced steel  
Weather seal

### OPTIONS

- Galvanised steel offers the option of perforated curtain profile for vision and ventilation\*
- Thermal upgrade available
- Acoustic upgrade available
- High wind resistance upgrade available

### FINISH

Finish as delivered: Polyester powder coated in standard RAL/BS colours


\*Minimum width 2400mm

### PRODUCT REFERENCE

Obexion ID2 Industrial Door

### PERFORMANCE

Certified to LPS 1175 Issue 8 B3 (SR2)

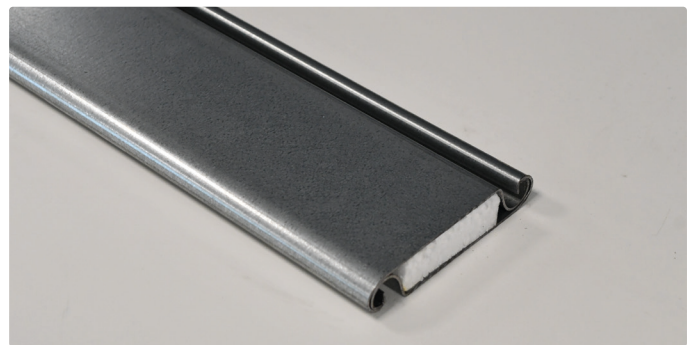

### SUITABLE SUBSTRATES:

- Brickwork
- Blockwork
- Concrete
- Structural Steelwork
- Sub assembly steel framework

### FRAMES/GUIDES

Two-part galvanised steel guide with rubber seals

### OPERATION

Hold-to-run operation with manual locks  
Automatic operation with electronic locks  
Safety on close as assessment directs



LPS 1175 Issue 8  
Cert. No. 1075d



Asse. to ISO 9001:2015  
Cert./LPCB ref. 1396



Secured by Design



Police Preferred Specification