


OBEXION MD XR SECURITY SHUTTER

National Protective Security Authority

ACCREDITATIONS

- Independently tested by the NPSA (formerly known as the CPNI)
- Approved for UK Government use
- For details, please contact NPSA

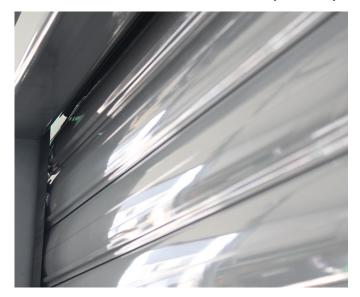

CERTIFIED PROTECTION AGAINST:



Forced Entry: Bodily Force Mitigation of opportunist intruder attempts using manual or bodily force including tools.



Forced Entry: Power Tools Protecting against deliberate forced entry of premises using mechanically-enhanced power tools.



Bespoke

Securing people, property and assets against be-

spoke risks and severe threats.

The Obexion MD XR security shutter is the approved for UK government use by the National Protective Security Authority (NPSA), and is the most secure, third party accredited shutter system currently on the market. Supplied and manufactured by Charter Global, NPSA is the government authority that provides protective security advice to businesses and organisations involved, in any way, with the UK national infrastructure or UK defence.

LOCKDOWN TECHNOLOGY

No auxiliary locking required, manual or electronic.

Unique profiles lock shutter in any stop position - fully closed or otherwise.

Allows external first point-of-entry through the shutter.





OBEXION MD XR SECURITY SHUTTER

SUITABLE APPLICATIONS INCLUDE:

- Critical National Infrastructure
- Defence Estate
- Military and National Security

SHUTTER CURTAIN

Extruded aluminium LockDown profiles.

Finish as delivered: polyester powder coated in standard RAL/BS colour.

BOTTOM RAIL

Reinforced extruded aluminium section with strengthened core.

CONTROLS

Full range of compatible controls including push button switch, key switch, radio control or integration into existing building management systems and third party alarm.

Safety on close as assessment directs.

Contact NPSA for further information.



PRODUCT REFERENCE

Obexion MD XR Security Shutter

PERFORMANCE

Approved for UK Government use

SUITABLE SUBSTRATES:

Certified installation onto:

- Reinforced Concrete
- Structural Steelwork

FRAMES/GUIDES

Heavy duty guide profiles anchored direct to the structure.

Finish as delivered: polyester powder coated in standard RAL/BS colour.

OPERATION

Motorised to allow controlled ascent and descent. 240v - Low duty cycle or where limited to single phase supply.

415v - High duty cycle or for larger apertures.





