



Sovereign


the gold standard in building products

Technical
Data Sheet

322

Sovereign Timber Preservative

Sovereign Timber Preservative is a ready-to-use solvent based wood preservative for amateur, professional and industrial use.

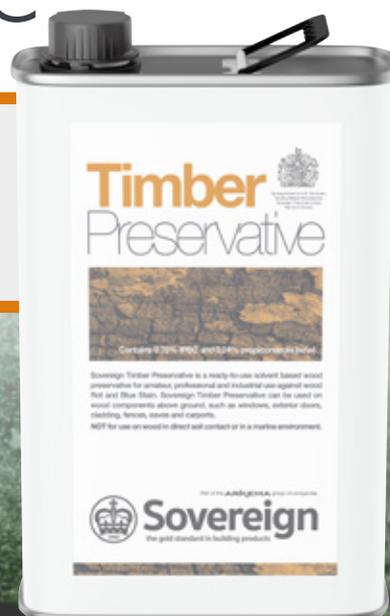

Product Code
30806490

Description

Sovereign Timber Preservative is a ready-to-use solvent based wood preservative for amateur, professional and industrial use against wood rot and blue stain. It can be used on wood components above ground such as windows, exterior doors, cladding, fences, eaves and carports.

Form Supplied: Solvent based, ready to use

Pack Sizes: 5 Litres

Colour Range: Clear

Contains: 0.75% w/w IPBC 0.24% Propiconazole

Properties

Sovereign Wood Preservative will prevent the onset of wet rot, dry rot and blue stain. It is based on a non flammable, deep penetrating solvent.

Preparation

Sovereign Timber Preservative can be applied by brush, spray, dip and double vacuum impregnation. Ensure timber is free from any dirt or debris, and that any coatings have been removed.

Timber must be dry (<18% MC) and free of dust and coatings to ensure penetration into the surface.

Timber must be sanded to clean and bright and all workings carried out before application. Do not sand treated timber as this will remove the upper layer with the highest concentration of protection.

After application allow the solvent to fully dry from the timber before applying any further coatings.

The drying time is dependant on many factors and we would recommend that a minimum of 24 hours is allowed in good drying conditions and longer in low temperatures etc. Timber should be stacked to allow a good airflow around treated materials.

GENERAL

Suitable for all types of soft and hardwood applications such as:

- ✓ Windows and Doorframes
- ✓ Skirtings and Rails
- ✓ Floorboards
- ✓ Roofing Timbers
- ✓ Soffits
- ✓ Sheds and Fencing
- ✓ Garden Furniture

GUIDELINES FOR USE IN DIP TANKS

1. Empty and clean out the tank thoroughly on a regular basis (at least every 6 months).
2. Always cover when not in use.
3. Stir gently before use.
4. Use as much 'old' material up as possible before topping up the tank.
5. Do not dip damp wood.
6. The wood to be dipped must be free from sawdust, wood shavings, or other extraneous materials.
7. Use a grate raised above the bottom of the tank so that any debris, etc. is deposited below.
8. Ensure that the dip tank is not contaminated with, for example, solvent washings from paint brushes, etc. as this can also lead to settlement/separation.
9. Do not blend with other wood preservatives, as they could be incompatible with Sovereign Wood Preservative.

CLEAN UP

Use Sovereign Turps Substitute, white spirit or brush cleaner on tools and brushes.

PRECAUTIONS

External timber must be protected with a weatherproof coating.

COVERAGE

Approximately
Dip: 3 minutes minimum
Brush/Spray: 5 m²/litre

DILUTION

Timber Preservative must never be diluted.

Storage: Between 5°C - 30°C.

Shelf Life: 12 months unopened.

HEALTH & SAFETY

- ! Keep out of reach of children. Keep away from food, drink and animal feeding stuff. When using do not eat, drink or smoke. Avoid contact with skin and eyes.



**Health & safety information
available on request**



Important Disclaimer

The information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that product, techniques and codes of practice are under constant review and changes occur without notice. Please ensure you have the latest updated information.



Sovereign

the gold standard in building products

Sovereign Support: 01229 870800 | www.sovchem.co.uk

FIND US HERE

