


Data Sheet

Date: 02/03/2022
Revision no: 4
Page no: 1/1

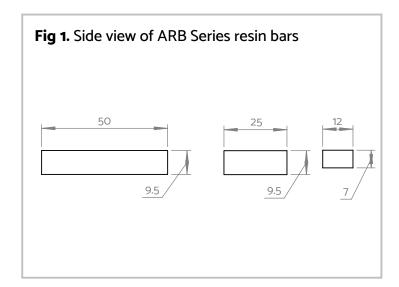

Item: AATi[™] Resin-based Carburaati[™] Insert Bar with antislip particles bonded onto the foot contact surface.

Application: For use on most stair and walkway surfaces, particularly smooth/polished wood, marble, stone etc, which can be unacceptably slippery, particularly when wet.

Materials: MMA Resin base. The standard colour is black but other RAL Colours are available. The finished colour required influences whether silicon carbide, alumnium oxide or quartz particles are used as the antislip ingredient.

Compliance: This anti-slip insert provides colour contrast & slip resistance in the spirit of British Standards BS 8300 & Building Regulations Part M. Please speak to our technical team to assist you with selecting the correct product for your application. Information on light reflectance values available upon request.

Cut to suit: Anti-slip Insert Bars can be produced to suit any stair width (**Fig 2**). Individual profiles can be made up to 1200mm. Longer lengths shall be supplied in multiple pieces. All products are supplied cut to length, with Marfix adhesive and with production drawings submitted for client approval.

