
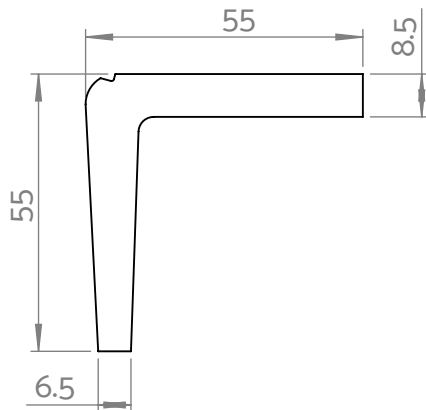


**Fig 1.** Side view of SN9/55P stair nosing.



**Fig 2.** Plan view of SN9/55P stair nosing.

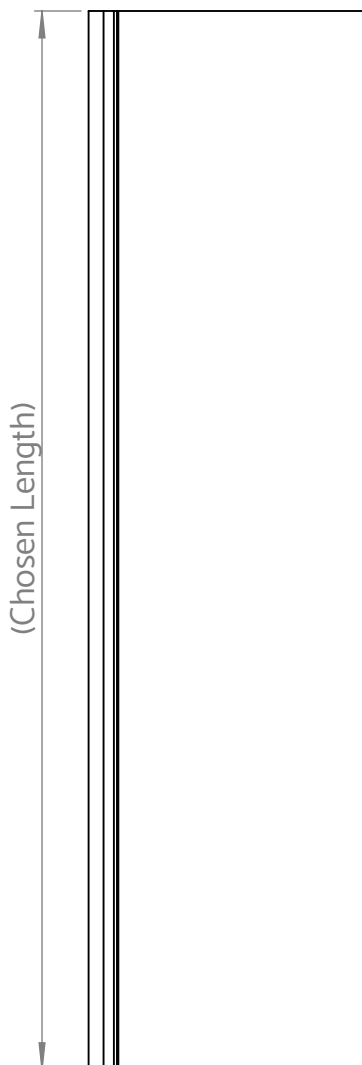

**Item:** AATi™ type SN9/55P<sup>®</sup> - anti-slip stair nosing with silicon carbide granules cast into the metal matrix of the wearing surface. This is a protected and registered design:

<sup>®</sup> - Protected by European Registered Design No. 002178 178-0001/6.

**Application:** This anti-slip stair nosing is suitable for many different applications and exhibits the same longevity and hard wearing/heavy duty characteristics as our larger profile nosings. Suitable for highly populated interior & exterior applications.


**Materials:** Nickel Bronze, Gunmetal, Aluminium & Cast Iron (*\*zinc plated black*). Different materials increase the longevity of the product, please speak to AATi technical team for further information.

**Environment:** Metals are sustainably sourced coming from predominantly recycled origins and all the metals we use through our production process can be 100% recycled in our factory.

**Compliance:** This anti-slip stair nosing provides colour contrast & slip resistance in accordance with British Standards BS 8300 & Building Regulations Part M & K. Please speak to our technical team to assist you with selecting the correct product and material for your application. Information on light reflectance values available upon request.

**Cut to suit:** Anti-slip stair nosings can be produced to suit any stair width (**Fig 2**). Individual profiles can be made up to 1900mm in Cast Aluminium, Nickel Bronze & Gunmetal. Cast Iron (*\*zinc plated black is only available in max length of 1.7m*). Longer lengths shall be supplied in multiple pieces. All products are supplied cut to length, pre-drilled and countersunk with production drawings submitted for client approval.

**Fig 3.** 3D view SN9/55P stair nosing.

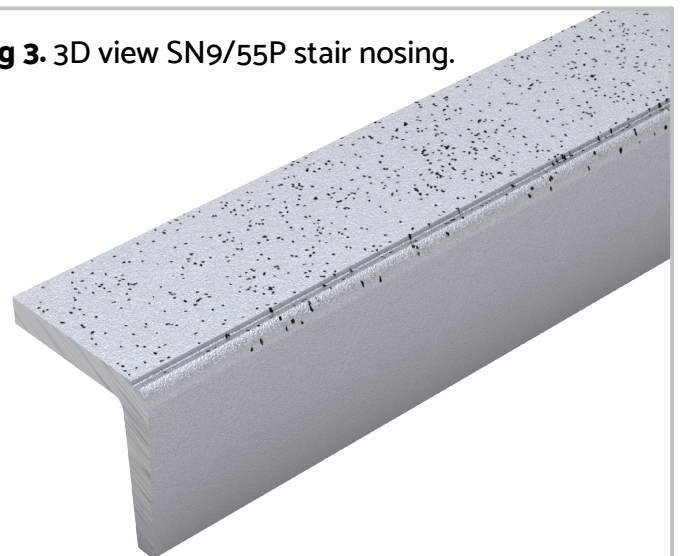

**NB:** Nosing's must be installed in such a way that standing water is omitted. Please refer to AATi O&M Manual  
All AATi products are subject to our manufacturing tolerances and should be taken into consideration when installing