

PANEL PLUS FREESTANDING

ELEGANCE, SIMPLICITY AND POWER

Streamlined, elegant design. The compact style of the Panel Plus allows creative freedom to the designer and saves space too! The sober design with a top grille included gives the Panel Plus an understated quality. Panel Plus is a super compact and solid freestanding solution but is also available as a horizontal or vertical wall radiator.



PRESENTING PANEL PLUS FREESTANDING



DREAM
A FUTURE


PANEL PLUS FREESTANDING



DIMENSIONS (in mm)

PANEL PLUS FREESTANDING

- standard connection
- variant

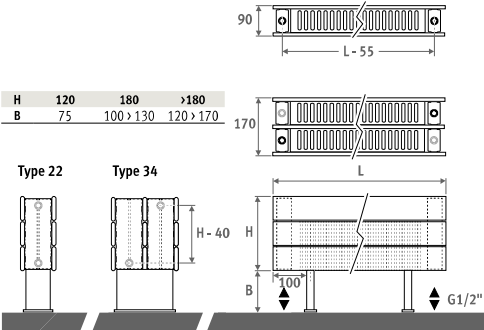

DELIVERY

Product is made to order, please contact our customer service team on 01531 631 533 to discuss your requirements.

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (333), smooth satin matt
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

CONNECTION

Code:

1° number = flow

2° number = return

Standard connection:

Code 18, reversible 18 or 81

Other connections (no surcharge):

- side connection:
 - one-sided: code 32 or 67 instead of 18
 - cross-over: code 37 or 62 instead of 18
- single point connection: code 11 (left) or 88 (right) instead of 18.

Always use a vertical diffusion tube (ø 10 to 12mm) min. 100 mm long and a reduction washer.


VALVES

See page 96.

BENCH RADIATOR

L	T	S*	V*
1200	99.0	2	2
1600	69.5	3	2
2000	89.5	3	2
2400	109.5	3	3
2800	86.5	4	3

* S = number of bench supports,
V = number of feet

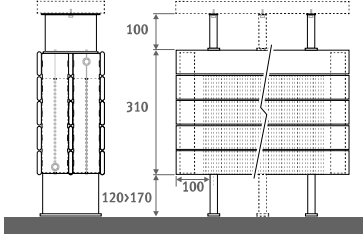

Horizontal version: see p. 100.
Vertical version: see p. 154.

HEIGHT 180-310 ■ OUTPUT TABLES

PPHF.HHH.LLL.TT.XXX/18/GR


L	HEIGHT 180			HEIGHT 240			HEIGHT 310		
	Type	Watts	Watts	Type	Watts	Watts	Type	Watts	Watts
mm		75/65	55/45		75/65	55/45		75/65	55/45
600	N/A	N/A	N/A	22	477	239	22	571	287
	N/A	N/A	N/A	34	875	417	34	1018	485
800	N/A	N/A	N/A	22	636	319	22	761	382
	N/A	N/A	N/A	34	1166	555	34	1357	647
1000	22	626	314	22	794	399	22	951	477
	34	1140	543	34	1458	694	34	1697	809
1200	22	751	377	22	953	478	22	1142	573
	34	1369	652	34	1749	833	34	2036	970
1400	22	876	440	22	1112	558	22	1332	669
	34	1597	761	34	2041	972	34	2375	1132
1600	22	1001	503	22	1271	638	22	1522	764
	34	1825	869	34	2332	1111	34	2715	1294
1800	22	1126	565	22	1430	718	22	1713	860
	34	2053	978	34	2624	1250	34	3054	1455
2000	22	1252	629	22	1589	798	22	1903	955
	34	2281	1086	34	2915	1388	34	3393	1617
2200	22	1377	691	22	1748	878	22	2093	1051
	34	2509	1195	34	3207	1527	34	3733	1779
2400	22	1502	754	22	1907	957	22	2283	1146
	34	2737	1304	34	3498	1666	34	4072	1940
2600	22	1627	817	22	2065	1037	22	2474	1242
	34	2965	1412	34	3790	1805	34	4411	2102
2800	22	1752	880	22	2224	1117	22	2664	1337
	34	3193	1521	34	4081	1944	34	4751	2264
3000	22	1877	942	22	2383	1196	22	2854	1433
	34	3421	1629	34	4373	2083	34	5090	2426

Panel Plus freestanding is available from height 60 mm up to 310 mm and length 600 mm up to 4600 mm. See: www.jaga.co.uk

EN442 output at 20°C room temperature

PANEL PLUS BENCH RADIATOR ■ OUTPUT TABLE

Bench not included

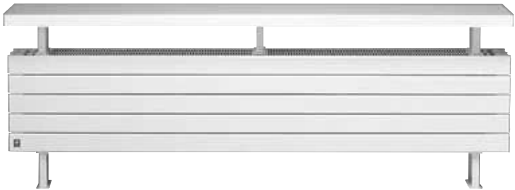

PPHF.031.LLL.34.XXX/18/BE

L	HEIGHT 310		
	Type	Watts	Watts
mm		75/65	55/45
1200	34	2199	1158
	34	2932	1544
1600	34	3665	1929
	34	4398	2315
2000	34	5131	2701
	34	5864	3087

Bench not included

EN442 output at 20°C room temperature