

PANEL PLUS

ELEGANCE, SIMPLICITY AND POWER

Streamlined, elegant design. The Panel Plus can be fitted as a wall mounted radiator, but Jaga also offers a super compact, solid skirting model or horizontal version ! The simple design of the Panel Plus radiator with its hidden rear collectors provides an elegant simplicity that oozes quality.



jaga



CREATE
EMOTION


PRESENTING PANEL PLUS





DIMENSIONS (in mm)

- standard connection
- variant

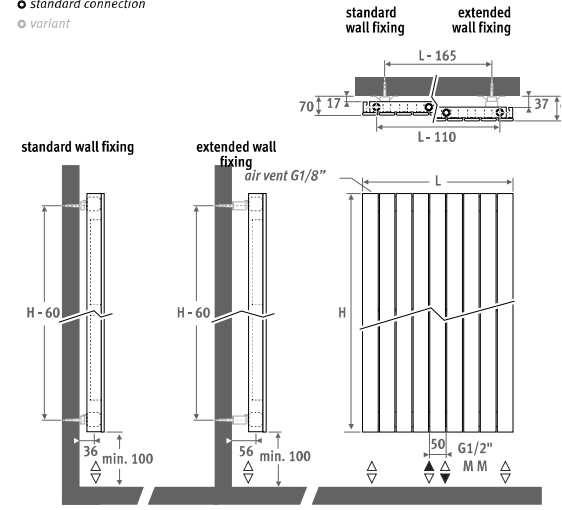

DELIVERY

Product is made to order, please contact our customer service team on 01531 631 533 to discuss your requirements.

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (333), smooth satin matt
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

CONNECTION


Code:

1° number = flow

2° number = return

Standard connection:

Universal central connection at the bottom, code MM, flow left or right. Connection 18 or 81 at the bottom is also possible with code MM.



Top connection (no surcharge): enter code 45 or 54, provide an air vent on the central heating pipework.

Vertical : pipe centres for horizontal based on 1/8 connections. Length of radiator MINUS (-) 110mm. E.g. 430mm long - 110mm = 320mm pipe centres.

VALVES

See page 182.

Horizontal version: see p. 164
Freestanding version: see p. 178

PPVW.HHH.LLL.XXX/MM

HEIGHT 1800

L mm	Watts 75/65	Watts 55/45
240	584	297
310	730	371
370	875	444
430	1021	519
500	1167	593
560	1313	667
620	1459	741
690	1605	815
750	1751	889
810	1897	964
870	2043	1038
940	2189	1112

HEIGHT 2000

L mm	Watts 75/65	Watts 55/45
240	644	329
310	805	411
370	965	493
430	1126	575
500	1287	657
560	1448	739
620	1609	821
690	1770	904
750	1931	986
810	2092	1068
870	2253	1150
940	2414	1232

HEIGHT 2200

L mm	Watts 75/65	Watts 55/45
240	700	359
310	876	450
370	1051	539
430	1226	629
500	1401	719
560	1576	809
620	1751	899
690	1926	988
750	2101	1078
810	2276	1168
870	2451	1258
940	2627	1348

HEIGHT 2400

L mm	Watts 75/65	Watts 55/45
240	754	389
310	943	486
370	1131	583
430	1320	681
500	1508	777
560	1697	875
620	1885	972
690	2074	1069
750	2262	1166
810	2451	1264
870	2639	1361
940	2828	1458

EN442 output at 20°C room temperature