


Product specification Euroslide patio doors



All together better

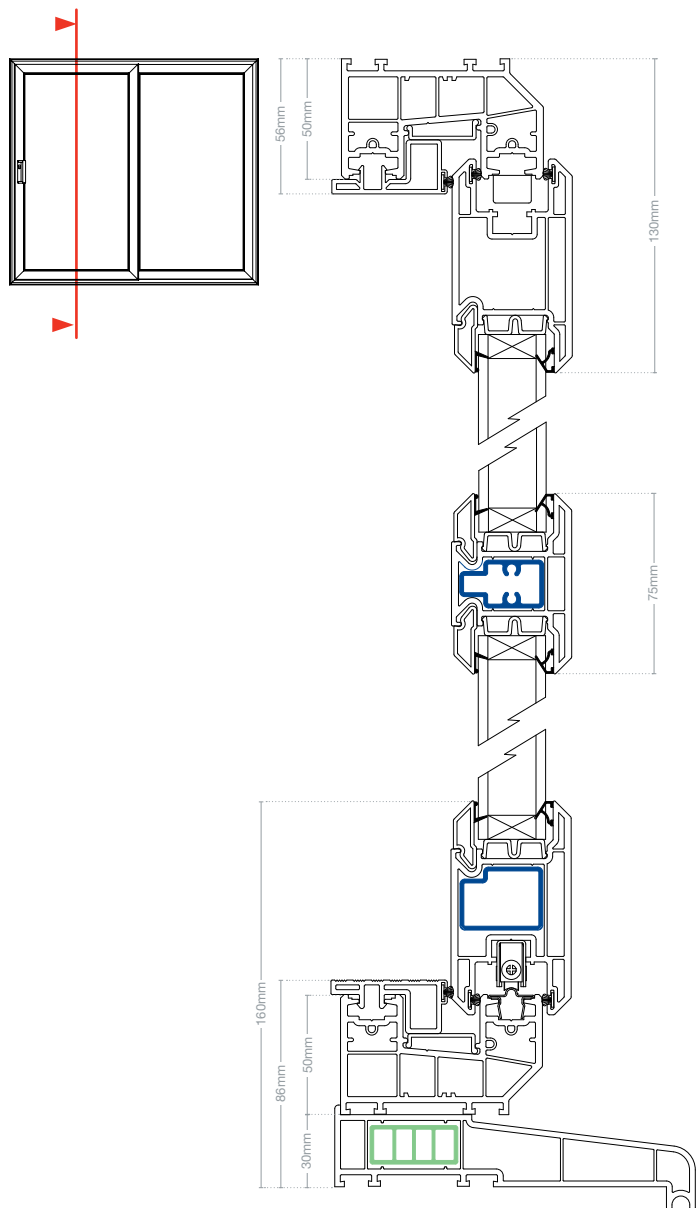

EUROSLIDE DOUBLE GLAZED SPECIFICATION

Profiles

– Eurocell **euroslide** system

Reinforcements

– Aluminium

Cill options

Standard: 85mm (130mm*), 150mm (195mm*) and 180mm (225mm*)

* When used with cill extender

Accreditations

– BS 6375-1

Style



Chamfered



Ovolo (beads only)

Colour options

Standard colours



Extended lead-time colours



Non-standard options

Eurocell profiles are available in any colour from our made-to-order range. These are available on a three-week lead-time.

Min /max sizes

If the patio doors to be manufactured are outside these sizes, please consult Eurocell's technical department.

System	Width (mm)	Height (mm)
2 pane	Max: 3000	Max: 2455
	Min: 1650	Min: 1950
3 pane	Max: 4500	Max: 2455
	Min: 2480	Min: 1950
4 pane	Max: 5930	Max: 2455
	Min: 3220	Min: 1950

Thermal performance

System	External pane	Internal pane	Gas fill	Spacer bar	U Value
euroslide	Float	Pilkington K	Argon	Non-metallic warm edge	1.7
euroslide	Float	AGC Planibel A	Air	Non-metallic warm edge	1.8
euroslide	Float	AGC Planibel A	Argon	Metallic spacer	1.7
euroslide	Float	AGC Planibel A	Argon	Non-metallic warm edge	1.6
euroslide	Float	SG Planitherm Total Plus	Air	Non-metallic warm edge	1.7
euroslide	Float	SG Planitherm Total Plus	Argon	Metallic spacer	1.6
euroslide	Float	SG Planitherm Total Plus	Argon	Non-metallic warm edge	1.5

Note: The calculations left should be used for guideline purposes only. Other options also available. To have **euroslide** performance simulated, please contact Eurocell's technical department.