


Product specification Vertical sliding sash windows

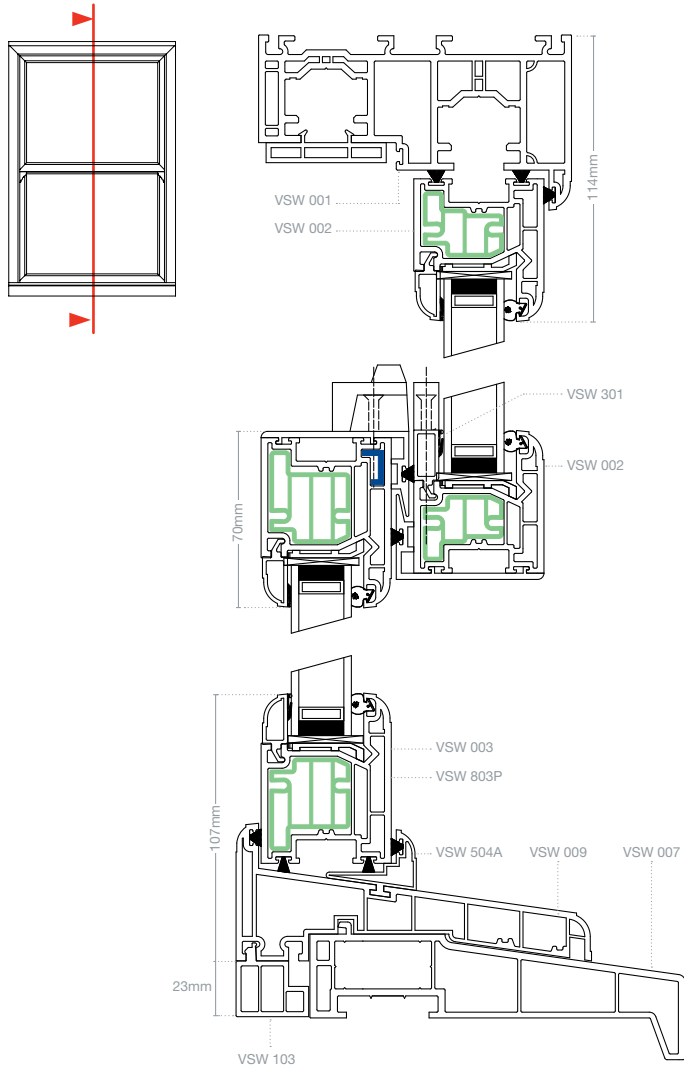

CHARISMA SPECIFICATION 1 DOUBLE GLAZED

Profiles

– Eurocell **charisma** profile system

Reinforcements

– PVC-U Thermal Inserts

Cill options

Sizes: 180mm and 150mm (shown)
Ovolo cill adaptor available (shown)

Accreditations

– Eurocell **charisma** profile system is BBA certified (assessment report number 2571)
– BS EN 12608, BS 7412, BS 6375, BS 7950

Colour options

Standard colours



Non-standard options

Eurocell profiles are available in any colour from our made-to-order range. These are available on a three-week lead-time.

Thermal performance

Config	Glass 1 (external)	Glass 2 (internal)	Gas	Spacer bar	Reinforcing	WER	Energy Index	U-value
4/16/4	Pilkington Optiwhite	Pilkington KS	Argon	Superspacer Premium	PVC-U TI	A ⁺	12	1.4
4/16/4	SG Diamant	SG Planitherm Total Plus	Argon	Superspacer Premium	PVC-U TI	A ⁺	10	1.4
4/16/4	Pilkington Optiwhite	Pilkington KS	Argon	Swisspacer Ultimate	PVC-U TI	A	9	1.4
4/16/4	SG Diamant	SG Planitherm Total Plus	Argon	Swisspacer Ultimate	PVC-U TI	A	7	1.4
4/16/4	Float	Pilkington KS	Argon	Superspacer Premium	PVC-U TI	A	5	1.4

The above calculations should be used for guideline purposes only. Other options also available. To have **charisma classic** performance simulated, contact the Eurocell technical department.

Decorative options

– Decorative horns
– Georgian bars

Min /max window sizes

If windows are to be manufactured outside these sizes, please consult Eurocell's technical department.

System	Width (mm)	Height (mm)
Vertical sliding sash windows	Min: 400 Max: 1250*	Min: 640 Max: 1500*
	*1600 for steel / all	*2400 for steel / all

Reinforcements are to be used:

Cill adaptor and sashes: All
Outer frames (vertical): 1400m+
Outer frames (horizontal): 1000m+
Woodgrain profiles: All