


Product specification Vertical sliding sash windows

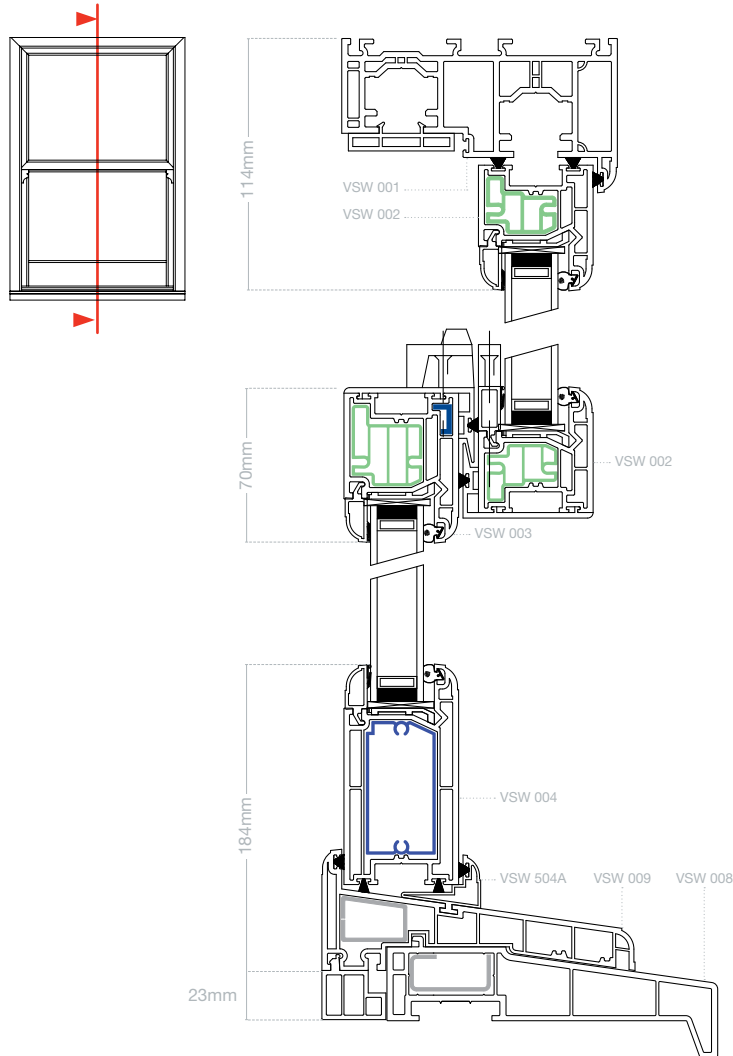

CHARISMA CLASSIC SPECIFICATION 1 DOUBLE GLAZED

Profiles

- Eurocell **charisma** profile system
- **charimsa classic** deep bottom rail

Reinforcements

- PVC-U Thermal Inserts
- Aluminium

Cill options

- Sizes:** 180mm (shown) and 150mm
- Ovolo cill adaptor** available (shown)

Accreditations

- Eurocell **charisma** profile system is BBA certified (assessment report number 2571)
- BS EN 12608, BS 7412, BS 6375, BS 7950

Colour options

Standard colours



Non-standard options

Eurocell profiles are available in any colour from our made-to-order range. These are available on a three-week lead-time.

Thermal performance

Config	Glass 1 (external)	Glass 2 (internal)	Gas	Spacer bar	Reinforcing	WER	Energy Index	U-value
4/16/4	Pilkington Optiwhite	Pilkington Optitherm S1+	Argon	Swisspacer Ultimate	PVC-U TI + AlI	B	-9	1.3

The above calculations should be used for guideline purposes only. Other options also available. To have **charisma classic** performance simulated, contact the Eurocell technical department.

Decorative options

- Unique-design **charisma classic** run through horns
- Georgian bars

Min /max window sizes

If windows are to be manufactured are outside these sizes, please consult Eurocell's technical department.

System	Width (mm)	Height (mm)
Vertical sliding sash windows	Min: 400	Min: 640
	Max: 1250*	Max: 1500*
	* 1600 for steel / ali	* 2400 for steel / ali

Reinforcements are to be used:

- Cill adaptor and sashes:** All
- Outer frames (vertical):** 1400m+
- Outer frames (horizontal):** 1000m+
- Woodgrain profiles:** All