


BELDEN ALTERNATIVE - 94 RANGE

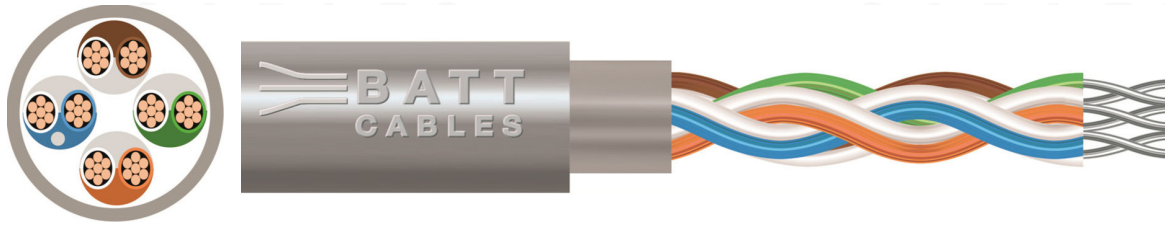

Belden Alternative power cables serve as the foundation for industrial setups, facilitating signal and power transmission within cable trays and enclosures. These cables adhere to rigorous standards, ensuring high-speed and high-quality end-to-end data transmission across various communication technology applications. They cover a wide range of industries including automation & process control, power generation, and data centres. With a focus on meeting Electronic Industries Alliance (EIA) standards, Belden equivalent cables are engineered to support high-speed data transmission, offering scalability to accommodate different project sizes. Reliable data transmission is crucial for businesses, underscoring the importance of installing top-quality cables for seamless operations.

CONDUCTOR	Tinned Copper
STRANDING	Class 2
INSULATION	PVC
INDIVIDUAL SCREEN	Individual Aluminium Mylar
OUTERSHEATH	PVC
OUTERSHEATH COLOUR	Grey
RATED VOLTAGE	300V
OPERATING TEMPERATURE	80°C

SPECIFICATION DATA

BATT Part No	Belden Reference	No. of Pairs	AWG No. of strands	Approx overall diameter	Weight
91089	9402	2 Pair	20 AWG	7.6	72
91093	9463	2 Pair	20 AWG	6.2	52

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

sales@battcables.com | www.batt.co.uk | 01322 441165

©2024 Batt Cables Limited

