



AUTOPA


TopLok Parking Post FB Galvanised, Galvanised & Colour or Stainless



Shown with optional lock



Shown with optional lock

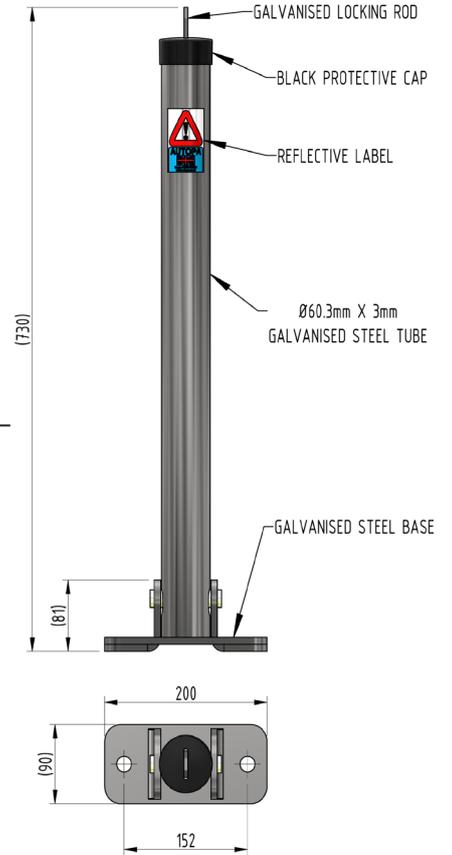

The hinged parking post is still the preferred choice for the protection of individual parking spaces throughout Britain.

The extremely durable and reliable design of the hinged parking post ensures your parking space will always be available. The reflective, high visibility label ensures your parking post will always be seen.

The TopLok parking post is unlocked by removing the padlock from the locking bar. The post is then fully raised or lowered and relocked by securing with the padlock (padlock not supplied - available as an optional extra)

For emergency access the TopLok Parking Post FB has a removable hinge pin which is secured with a Fire Brigade padlock (lock & key both available separately)

Available Galvanised, Galvanised and Colour Coated, or Stainless Steel (Grade 304)

Part Number	Description	Weight (kg)
138 301 311	Galvanised	6kg
138 301 314	Galvanised & Colour	6kg
138 301 315	Galvanised & Yellow	6kg
138 301 316	Galvanised & Black	6kg
138 301 319	Stainless Steel (Grade 304)	5kg

Product details

- 110mm minimum vehicle clearance
- Removable Hinge Pin
- Each post requires 2 x M16 bolts (available extra)
- 60mm diameter tube
- Base recess must be clear to allow locking

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP



FM 31071 EMS 503166 OHS 552103