


Removable Post 750mm Above Ground 60mm - 90mm Diameter Galvanised or Galvanised & Colour





The Removable Post offers an effective, simple and robust way to protect premises and vehicles. Removable Bollards are particularly suitable for locations where occasional access is required, the simple tab and padlock system provides an easy to operate solution for locking the bollard in place. The Removable Bollard is 750mm above ground and is available in a range of outside tube diameter size 60mm, 76mm and 90mm. Padlock to secure is available at an extra cost.

The Removable Post 750 is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways and can be used in conjunction with fixed bollards as part of a security system for all types of premises.

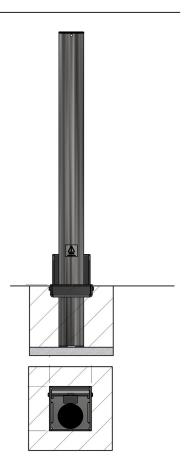

Part Number	<u>Description</u>	Lift Weight (kg)	Weight (kg)
138 100 221	60mm Galvanised - Removable	4kg	8kg
138 100 222B	60mm Galvanised & Black - Removable	4kg	8kg
138 100 222Y	60mm Galvanised & Yellow - Removable	4kg	8kg
138 100 222	60mm Galvanised & Colour - Removable	4kg	8kg
138 100 641	76mm Galvanised - Removable	5kg	9kg
138 100 642B	76mm Galvanised & Black - Removable	5kg	9kg
138 100 642Y	76mm Galvanised & Yellow - Removable	5kg	9kg
138 100 642	76mm Galvanised & Colour - Removable	5kg	9kg
138 100 361	90mm Galvanised - Removable	6kg	10kg
138 100 362B	90mm Galvanised & Black - Removable	6kg	10kg
138 100 362Y	90mm Galvanised & Yellow - Removable	6kg	10kg
138 100 362	90mm Galvanised & Colour - Removable	6kg	10kg

Product details

- 750mm (Height above ground)
- 3mm Wall thickness
- Black plastic cap

- Socket 220mm (below ground)
- Price excludes padlock to secure

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

