


Square Removable Bollard 900 Above Ground 90mm - 150mm Diameter Galvanised or Galvanised & Colour





The AUTOPA Square Removable Post is ideal for securing areas only occasional access is needed. The post is locked into the ground socket using a padlock (available separately) and can be removed as required to allow access. Additional ground sockets are available to safely store the post when it is not in use.

The Square Removable Post is available in sizes; 750mm, 900mm and 1000mm above ground. Manufactured from galvanised mild steel as standard and can be colour coated as required (BS/RAL codes must be specified at time of order). Also available in Black with a White reflective band.

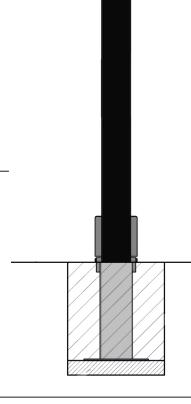

Part Number	<u>Description</u>	Lift Weight (kg)	Weight (kg)
138 100 661	90mm x 90mm Galvanised - Removable	10kg	14kg
138 100 665	90mm x 90mm Galvanised & Colour - Removable	10kg	14kg
138 100 665Y	90mm x 90mm Galvanised & Yellow - Removable	10kg	14kg
138 100 656	100mm x 100mm Galvanised - Removable	11kg	19kg
138 100 656C	100mm x 100mm Galvanised & Colour - Removable	11kg	19kg
138 100 656Y	100mm X 100mm Galvanised & Yellow - Removable	11kg	19kg
138 100 648	120mm x 120mm Galvanised - Removable	22kg	30kg
138 100 648C	120mm x 120mm Galvanised & Colour - Removable	22kg	30kg
138 100 648Y	120mm x 120mm Galvanised & Yellow - Removable	22kg	30kg
138 100 646	150mm x 150mm Galvanised - Removable	27kg	35kg
138 100 646C	150mm x 150mm Galvanised & Colour - Removable	27kg	35kg
138 100 646Y	150mm x 150mm Galvanised & Yellow - Removable	27kg	35kg

Product details

- Socket 220mm (below ground) 90mm diameter
- 90mm and 100mm 3mm wall thickness
- 120mm and 150mm diameters complete with handles
- Socket 300mm (below ground) 100mm 150mm diameter
- 120mm and 150mm 5mm wall thickness
- · Price excludes padlock to secure

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

