



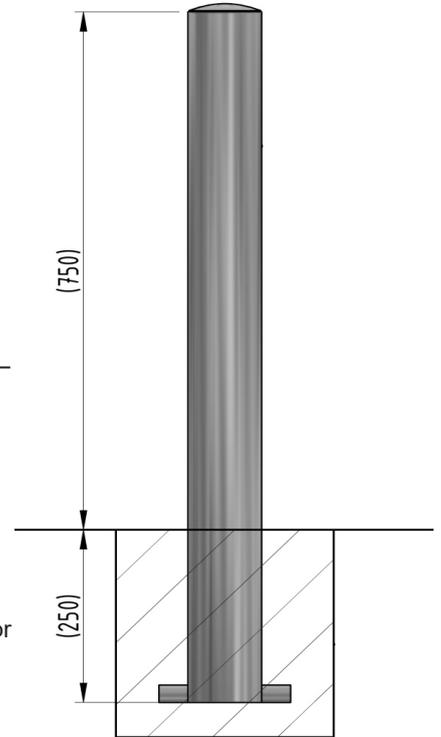

Fixed Bollard 750mm Above Ground 127mm - 193mm Diameter Galvanised

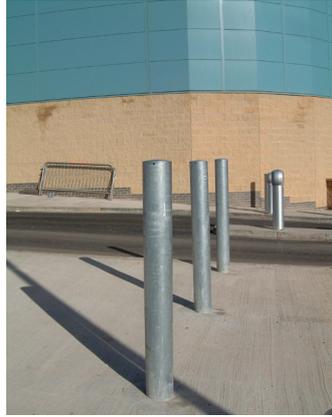

The galvanised mild steel range of 750mm tall fixed bollards are suitable for a range of applications and are ideal as a complement to the Autopa ranges of Parking Posts, RemovaPosts and RetractaPosts.

The round bollards are available in 60mm - 193mm diameter tube and come finished with a welded steel cap.

The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available extra.

Part Number	Diameter and Fixing Detail	Weight (kg)
138 121 553	127mm Galvanised - Concrete In	9kg
138 121 554	127mm Galvanised - Bolt Down	12kg
138 121 623	139mm Galvanised - Concrete In	17kg
138 121 626	139mm Galvanised - Bolt Down	19kg
138 121 674	152mm Galvanised - Concrete In	11kg
138 121 654	152mm Galvanised - Bolt Down	14kg
138 121 723	168mm Galvanised - Concrete In	20kg
138 121 724	168mm Galvanised - Bolt Down	21kg
138 121 783	193mm Galvanised - Concrete In	23kg
138 121 784	193mm Galvanised - Bolt Down	23kg

Product details

- 3mm wall thickness - 127mm and 152mm
- 5mm wall thickness - 139mm, 168mm, and 193mm
- Cast in 250mm (below ground)
- 4 bolts required per bollard (bolt down)
- Square flange plate - 250mm sq x 10mm

Installation & use

Bolt down to a suitable concrete surface.
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

