



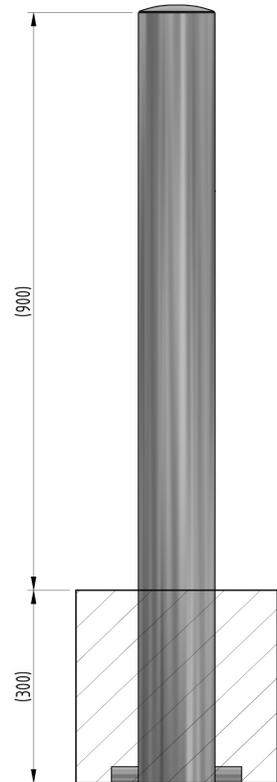

Fixed Bollard 900mm Above Ground 48mm -114mm Diameter Galvanised

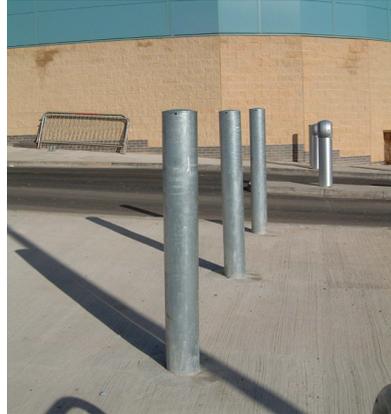

The galvanised mild steel range of 900mm tall fixed bollards are suitable for a range of applications and are ideal as a complement to the Autopa ranges of Parking Posts, RemovaPosts and RetractaPosts.

The round bollards are available in 48mm - 193mm diameter tube and come finished with a welded steel cap.

The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available.

<u>Part Number</u>	<u>Diameter and Fixing Detail</u>	<u>Weight (kg)</u>
138 121 033	48mm Galvanised - Concrete In	4kg
138 121 038	48mm Galvanised - Bolt Down	3kg
138 121 113	60mm Galvanised - Concrete In	5kg
138 121 118	60mm Galvanised - Bolt Down	4kg
138 121 243	76mm Galvanised - Concrete In	6kg
138 121 242	76mm Galvanised - Bolt Down	5kg
138 121 293	90mm Galvanised - Concrete In	7kg
138 121 292	90mm Galvanised - Bolt Down	6kg
138 121 313	101mm Galvanised - Concrete In	8kg
138 121 311	101mm Galvanised - Bolt Down	7kg
138 121 413	114mm Galvanised - Concrete In	10kg
138 121 412	114mm Galvanised - Bolt Down	8kg

Product details

- 3mm wall thickness
- Concrete in 300mm (below ground)
- 3 bolts require per bollard (bolt down)
- Round flange plate – 133mm x 5mm – 48mm and 60mm diameters
- Round flange plate – 180mm x 5mm – 76mm to 114mm diameters

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

