




# Plain Round Bollard 1000mm Above Ground 244mm - 406mm Diameter Galvanised

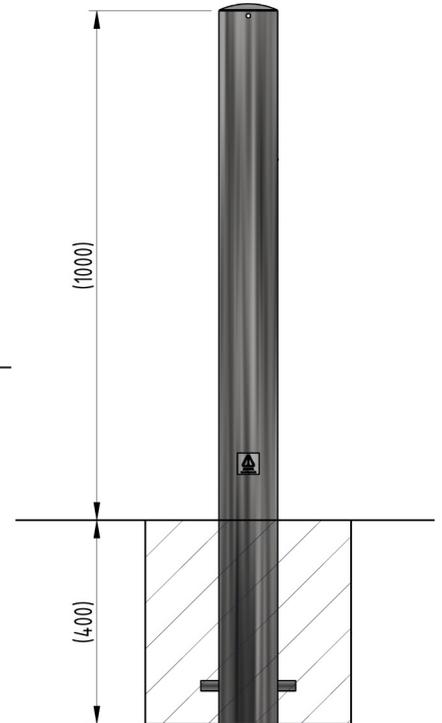

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 48mm to 406mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated and removable versions are also available.

<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 122 053	244mm Galvanised - Concrete In	65kg
138 122 103	273mm Galvanised - Concrete In	76kg
138 121 153	305mm Galvanised - Concrete In	106kg
138 121 203	323mm Galvanised - Concrete In	90kg
138 121 253	355mm Galvanised - Concrete In	124kg
138 121 303	368mm Galvanised - Concrete In	129kg
138 121 353	406mm Galvanised - Concrete In	142kg

## Product details

- 8mm wall thickness - 244mm, 273mm and 323mm
- 10mm wall thickness - 305mm, 355mm, 368mm and 406mm
- Concrete in 400mm (below ground)

## Installation & use

Bolt down to a suitable concrete surface.  
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.  
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.  
Products are guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

