

Plain Round Bollard 1000mm Above Ground 60mm - 114mm Diameter Galvanised & Yellow






AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Yellow bollards are suitble for use where high visability is paramount and can be used around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 60mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Additional colour coated options and removable versions are also available.

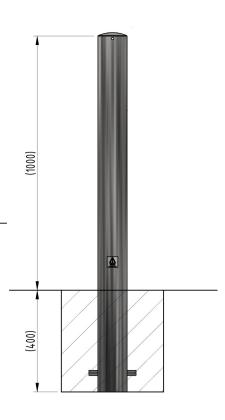

Part Number	<u>Description</u>	Weight (kg)
138 121 124Y	60mm Galvanised & Yellow - Concrete In	6kg
138 121 129Y	60mm Galvanised & Yellow - Bolt Down	6kg
138 121 201Y	76mm Galvanised & Yellow - Concrete In	7kg
138 121 207Y	76mm Galvanised & Yellow - Bolt Down	7kg
138 121 286Y	90mm Galvanised & Yellow - Concrete In	9kg
138 121 279Y	90mm Galvanised & Yellow - Bolt Down	9kg
138 121 306Y	101mm Galvanised & Yellow - Concrete In	10kg
138 121 304Y	101mm Galvanised & Yellow - Bolt Down	10kg
138 121 405Y	114mm Galvanised & Yellow - Concrete In	12kg
138 121 407Y	114mm Galvanised & Yellow - Bolt Down	12kg

Product details

- · 3mm wall thickness
- Concrete in 400mm (below ground)
- 3 bolts required per bollard (bolt down)

- Round flange plate 133mm x 5mm 60mm diameter
- Round flange plate 180mm x 5mm 76mm to 114mm diameters

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).





