




AUTOPA

Plain Square Bollard 1000mm Above Ground 50mm² - 150mm² Galvanised

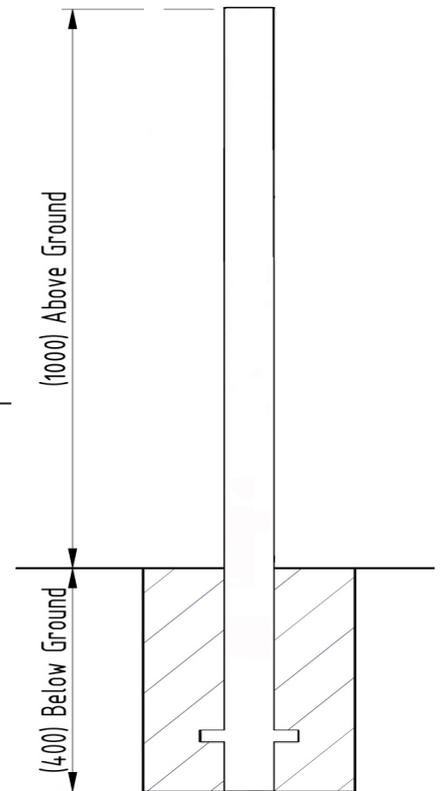

AUTOPA's range of Plain Square Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Square Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Square Bollards are available in diameters from 50mm² to 150mm² and are available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated and removable versions are also available.

| <u>Part Number</u> | <u>Description</u> | <u>Weight (kg)</u> |
|--------------------|--|--------------------|
| 138 121 860 | 50mm x 50mm Galvanised - Concrete In | 6kg |
| 138 121 850 | 60mm x 60mm Galvanised - Concrete In | 7kg |
| 138 121 871 | 70mm x 70mm Galvanised - Concrete In | 9kg |
| 138 121 878 | 80mm x 80mm Galvanised - Concrete In | 10kg |
| 138 121 880 | 90mm x 90mm Galvanised - Concrete In | 11kg |
| 138 121 820 | 100mm x 100mm Galvanised - Concrete In | 13kg |
| 138 121 830 | 120mm x 120mm Galvanised - Concrete In | 25kg |
| 138 121 840 | 150mm x 150mm Galvanised - Concrete In | 32kg |

Product details

- 3mm wall thickness - 50mm - 100mm diameters
- 5mm wall thickness - 120mm - 150mm diameters
- Concrete in 250mm (below ground)

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP



FM 31071 EMS 503166 OHS 552103