


## Hooped Perimeter Barrier 60mm Diameter Stainless Steel, Bolt Down



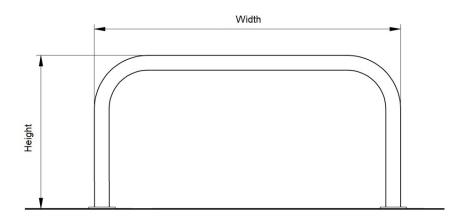

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 205 291	500 x 750 Stainless Steel Grade 304 - Bolt Down	5kg
138 205 289	500 x 1000 Stainless Steel Grade 304 - Bolt Down	5kg
138 205 285	500 x 1500 Stainless Steel Grade 304 - Bolt Down	6kg
138 205 281	500 x 2000 Stainless Steel Grade 304 - Bolt Down	7kg
138 205 274	750 x 1000 Stainless Steel Grade 304 - Bolt Down	6kg
138 205 270	750 x 1500 Stainless Steel Grade 304 - Bolt Down	7kg
138 205 217	750 x 2000 Stainless Steel Grade 304 - Bolt Down	8kg
138 205 259	1000 x 1000 Stainless Steel Grade 304 - Bolt Down	7kg
138 205 255	1000 x 1500 Stainless Steel Grade 304 - Bolt Down	8kg
138 205 251	1000 x 2000 Stainless Steel Grade 304 - Bolt Down	10kg

## **Product details**

- · 2mm wall thickness
- 6 bolts required per barrier
- Round flange plate 120mm x 5mm

Brushed finish

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

