




Hooped Perimeter Barrier

76mm Diameter

Stainless Steel, Concrete In

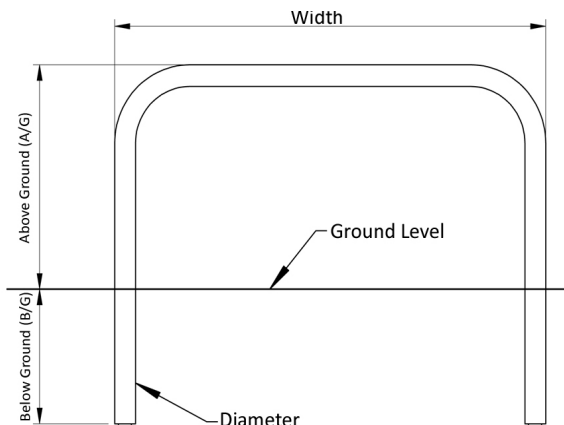

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Galvanised, Stainless steel, galvanised and colour coated available.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 205 341	500 x 750 Stainless Steel Grade 304 - Concrete In	7kg
138 205 339	500 x 1000 Stainless Steel Grade 304 - Concrete In	7kg
138 205 335	500 x 1500 Stainless Steel Grade 304 - Concrete In	9kg
138 205 331	500 x 2000 Stainless Steel Grade 304 - Concrete In	11kg
138 205 324	750 x 1000 Stainless Steel Grade 304 - Concrete In	9kg
138 205 320	750 x 1500 Stainless Steel Grade 304 - Concrete In	11kg
138 205 316	750 x 2000 Stainless Steel Grade 304 - Concrete In	13kg
138 205 309	1000 x 1000 Stainless Steel Grade 304 - Concrete In	11kg
138 205 305	1000 x 1500 Stainless Steel Grade 304 - Concrete In	13kg
138 205 301	1000 x 2000 Stainless Steel Grade 304 - Concrete In	15kg

Product details

- 2mm wall thickness
- Concrete in 300mm (below ground)
- Brushed finish

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

