


## Square RetractaPost 745 745mm Galvanised or Galvanised & Colour





The Square RetractaPost 745 is an effective means of preventing unauthorised vehicle access. When not in use, the post retracts into its integrated socket and is covered by the integral lid. The post can be raised to restrict vehicle access and secured with a padlock (available separately).

Simple and unobtrusive, the Square RetractaPost 745 is perfect for use on commercial car parks, vehicle forecourts and domestic driveways. The Square RetractaPost 745 is manufactured from galvanised mild steel and can be colour coated to any standard BS/RAL number (please state codes at time of order).

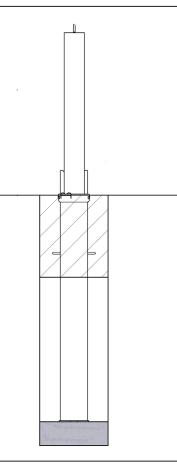

<u>Description</u>	Lift Weight (kg)	Weight (kg)
60mm x 60mm Galvanised	6kg	19kg
60mm x 60mm Galvanised & Black	6kg	19kg
60mm x 60mm Galvanised & Yellow	6kg	19kg
60mm x 60mm Galvanised & Colour	6kg	19kg
70mm x 70mm Galvanised	7kg	26kg
70mm x 70mm Galvanised & Black	7kg	26kg
70mm x 70mm Galvanised & Yellow	7kg	26kg
70mm x 70mm Galvanised & Colour	7kg	26kg
	60mm x 60mm Galvanised 60mm x 60mm Galvanised & Black 60mm x 60mm Galvanised & Yellow 60mm x 60mm Galvanised & Colour 70mm x 70mm Galvanised 70mm x 70mm Galvanised & Black 70mm x 70mm Galvanised & Yellow	60mm x 60mm Galvanised 6kg 60mm x 60mm Galvanised & Black 6kg 60mm x 60mm Galvanised & Yellow 6kg 60mm x 60mm Galvanised & Colour 6kg 70mm x 70mm Galvanised 7kg 70mm x 70mm Galvanised & Black 7kg 70mm x 70mm Galvanised & Yellow 7kg

## **Product details**

- 745mm (Height above ground when raised)
- Other colours can be provided on request (RAL no. to be advised)
- 3mm wall thickness Galvanised and galvanised & colour
- Socket 1010mm (below ground)
- Red/White chevron tape available extra

## Installation & use

AUTOPA recommends that posts are placed no further than 1,200mm apart to ensure that no vehicle may pass between them.

An excavated hole (no less than 1,200mm deep and 300mm2) is required for installation.

Provision for suitable drainage must be made at the bottom of the hole. The uppermost 300 - 400mm must be set into concrete.

The lid of the post should be no more than 10mm above finished ground level.

This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

