




GFC1900 (Slough) 900mm Galvanised or Galvanised & Colour

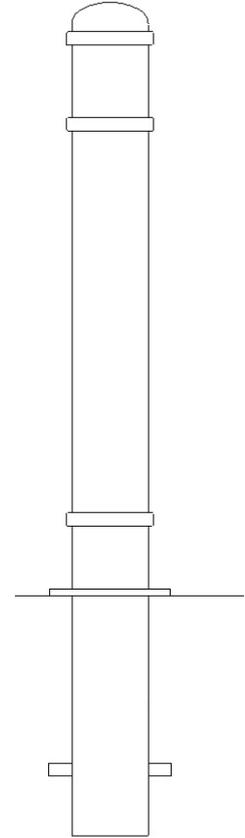

The GFC1900 (Slough) Ornamental Mild Steel Bollard from AUTOPA is suitable for a wide range of locations and purposes. Constructed using mild steel, then galvanised to ensure its longevity. Cap and rings are welded onto the steel tube to complete the design.

Supplied concrete in as standard, bolt down and removable versions are also available.

The bollards are available in a galvanised and galvanised and coated finish (RAL numbers must be specified at time of order).

Eyelets, hooks and chains can be added to these bollards to complete the decorative effect.

<u>Part Number</u>	<u>Description</u>	<u>Lift Weight (kg)</u>	<u>Weight (kg)</u>
138 120 021	Galvanised - Concrete In		13kg
138 120 022	Galvanised & Black - Concrete In		13kg
138 120 023	Galvanised & Colour - Concrete In		13kg
138 120 024	Galvanised - Bolt Down		13kg
138 120 025	Galvanised & Black - Bolt Down		13kg
138 120 026	Galvanised & Colour - Bolt Down		13kg
138 120 027	Galvanised - Removable	13kg	21kg
138 120 028	Galvanised & Black - Removable	13kg	21kg
138 120 029	Galvanised & Colour - Removable	13kg	21kg

Product details

- 900mm height above ground
- 114mm diameter
- 3mm wall thickness
- Concrete in 300mm (below ground)
- Price excludes fixing down bolts and padlock to secure
- Socket - 300mm (below ground)

Installation & use

Bolt down to a suitable concrete surface.
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

