
Double Swing Height Restrictor 6m, 8m, 10m, 12m and 14m Galvanised and Colour



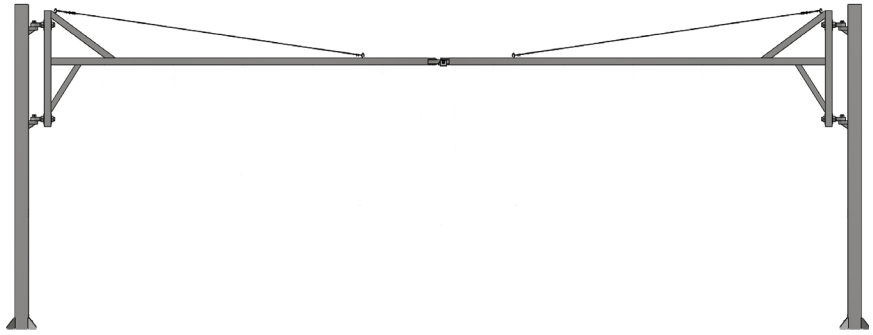


The AUTOPA Double Swing Height Restrictor has a standard clearance of 2.05m, limiting access to high sided vehicles. Ideal for use on commercial sites such as retail parks, it spans two carriageways, preventing vehicles from circumnavigating access control measures. The booms of the height restrictor can be opened when required to allow full access and locked in the open position if needed using additional catch posts.

Manufactured from galvanised mild steel, the body of the height restrictor is coated red as standard (other colours are available upon request; please state RAL numbers at time of order). The AUTOPA Double Swing Height Restrictor is available ragged or flanged and as an optional extra can be fitted with a knocking bar and/or a maximum height warning sign.

Knock bars to suit the barrier can be supplied at an extra cost.

The standard clearance is 2.05m with a knock bar, 2.2m without a knock bar.

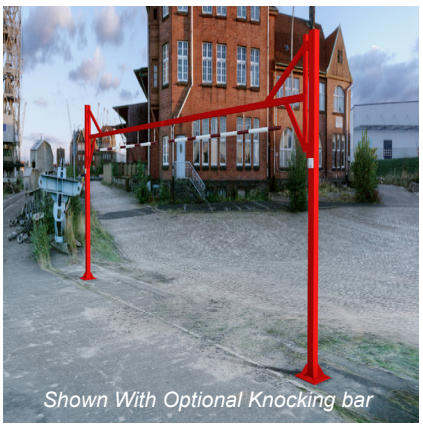

Part Number	Description
138 106 880	6m Galvanised & Colour - Bolt Down
138 106 880R	6m Galvanised & Colour - Concrete In
138 106 881	8m Galvanised & Colour - Bolt Down
138 106 881R	8m Galvanised & Colour - Concrete In
138 106 882	10m Galvanised & Colour - Bolt Down
138 106 882R	10m Galvanised & Colour - Concrete In
138 106 883	12m Galvanised & Colour - Bolt Down
138 106 883R	12m Galvanised & Colour - Concrete In
138 106 884	14m Galvanised & Colour - Bolt Down
138 106 884R	14m Galvanised & Colour - Concrete In

Product details

- Standard Clearance: 2.2m (without a knock bar)
- Standard Clearance: 2.05m (with a knock bar) **- Optional Extra**
- Main Body: 90mm x 90mm square tube
- Main Gate Arm: 60mm x 60mm square tube
- 3mm wall thickness
- Concrete in 600mm (below ground)

Installation & use

Bolt down Height Restrictors require bolting down to a suitable concrete surface (no less than 600mm3) by means of four M16 bolts per leg.
Concrete in Height Restrictors require an excavated hole (no less than 600mm3) for installation.
It is recommended that suitable signs are installed to ensure vehicles are aware of the obstruction.
This product is guaranteed for 12 months (if installed and used correctly).

British Made

www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

bsi
ISO 9001 Quality Management Systems CERTIFIED FM 31071
ISO 14001 Environmental Management CERTIFIED EMS 503166
ISO 45001 Occupational Health and Safety Management CERTIFIED OHS 552103