



The Oast, 62 Bell Road
Sittingbourne, Kent, ME10 4HE
T: 01795 423400 F: 01795 436070
E: info@therodingroup.co.uk W: www.therodingroup.co.uk

TECHNICAL DATASHEET - COMMERCIAL

MINI THERMOSTATIC EXPOSED SHOWER VALVE WITH CHROME LEVER


Product Specification

Product Code:	TS1203 EL C, TS1203 TO C
Finish:	Chrome
Product Type:	Commercial
Construction:	Body is of brass construction and is designed to conform to BS EN 1111:1999 (HP) & BS EN 1287:1999 (LP)
Valve Type:	Thermostatic Cartridge
Supply:	Suitable for all plumbing systems (Preferably balanced)
Inlet Connections:	15mm compression elbows
Outlet Connections:	½" BSP
Working Pressures:	Min 0.2bar, Max 8.0bar Maximum Static Pressure: 10.0 bar
Dimensions for Fitting:	110-155mm inlet centres



Additional Information

- Single sequential control for both temperature & flow.
- Automatic thermostatic shut-off in the event of hot or cold water failure.
- Check valves and serviceable filters as standard
- Supplied as 'valve only' ready to be customised by selecting a water saving hand-held or wall mounted shower head along with other accessories from our showering range.
- Adjustable inlet centres between 110 - 155mm +/- 1mm.
- Chrome plated to BS EN 248.

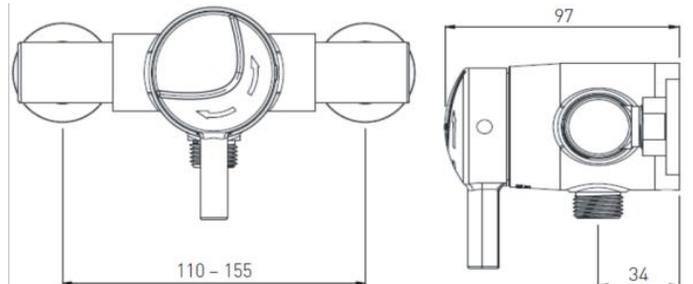

Technical Advice: For further information please call 01795 423400 or email info@therodingroup.co.uk

Guarantee: 1 year covering manufacturing faults.

Compliance / Approvals

WRAS: Certificate N^o: 1905901

TMV2: Certificate N^o: NSF2126/0619

TMV3: Certificate N^o: NSF2125/0619



Flow Rates (litres per minute)

System Pressure	0.2bar	0.6bar	1bar	2bar	3bar	4bar	5bar
Open Outlet	12.0	22.0	29.0	42.0	52.0	60.0	66.0