




Plank Grating 02

Steel 240 YP

Safety gratings Type 02™ are applied where high demands for slip resistance and weight is required. The closely spaced holes forms an even and transparent surface and gives the safety gratings an optimal strength/weight ratio. Gratings Type 02™ are produced in different dimensions and profiles.

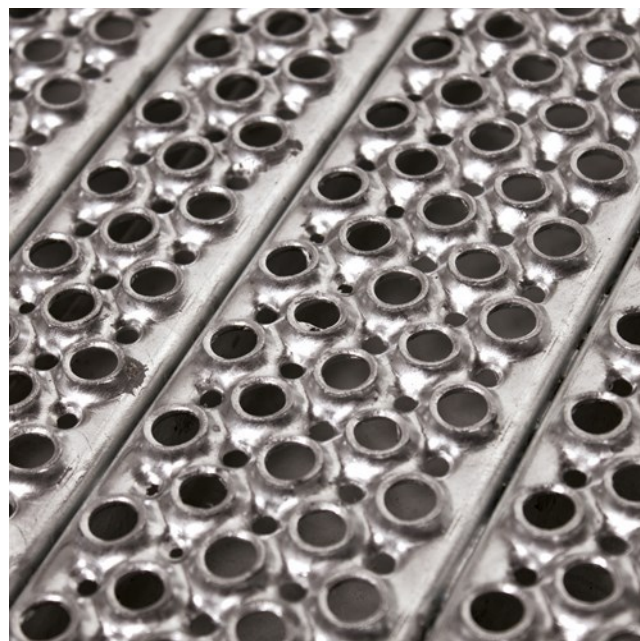

Specifications

Free area: 20-25 %

Load capacity: 1,5 kN / 100 x 100 mm acc. to EN ISO 14122-2

PTV guidelines: 36+ Low Slip Potential acc. to BS 7976

Dry PTV average: 66 multi-directional acc. to BS 7976

Wet PTV average: 50 multi-directional acc. to BS 7976

Slip resistance: R13 acc. to DIN 51130

Punched holes: dia. 9 mm

Drainage holes: dia. 5 mm


C-C grid: 25 x 25 mm

Ball proof: 15 mm in accordance with BS 4592

Suitable application areas

Access Walkways & Maintenance Platforms

Balconies

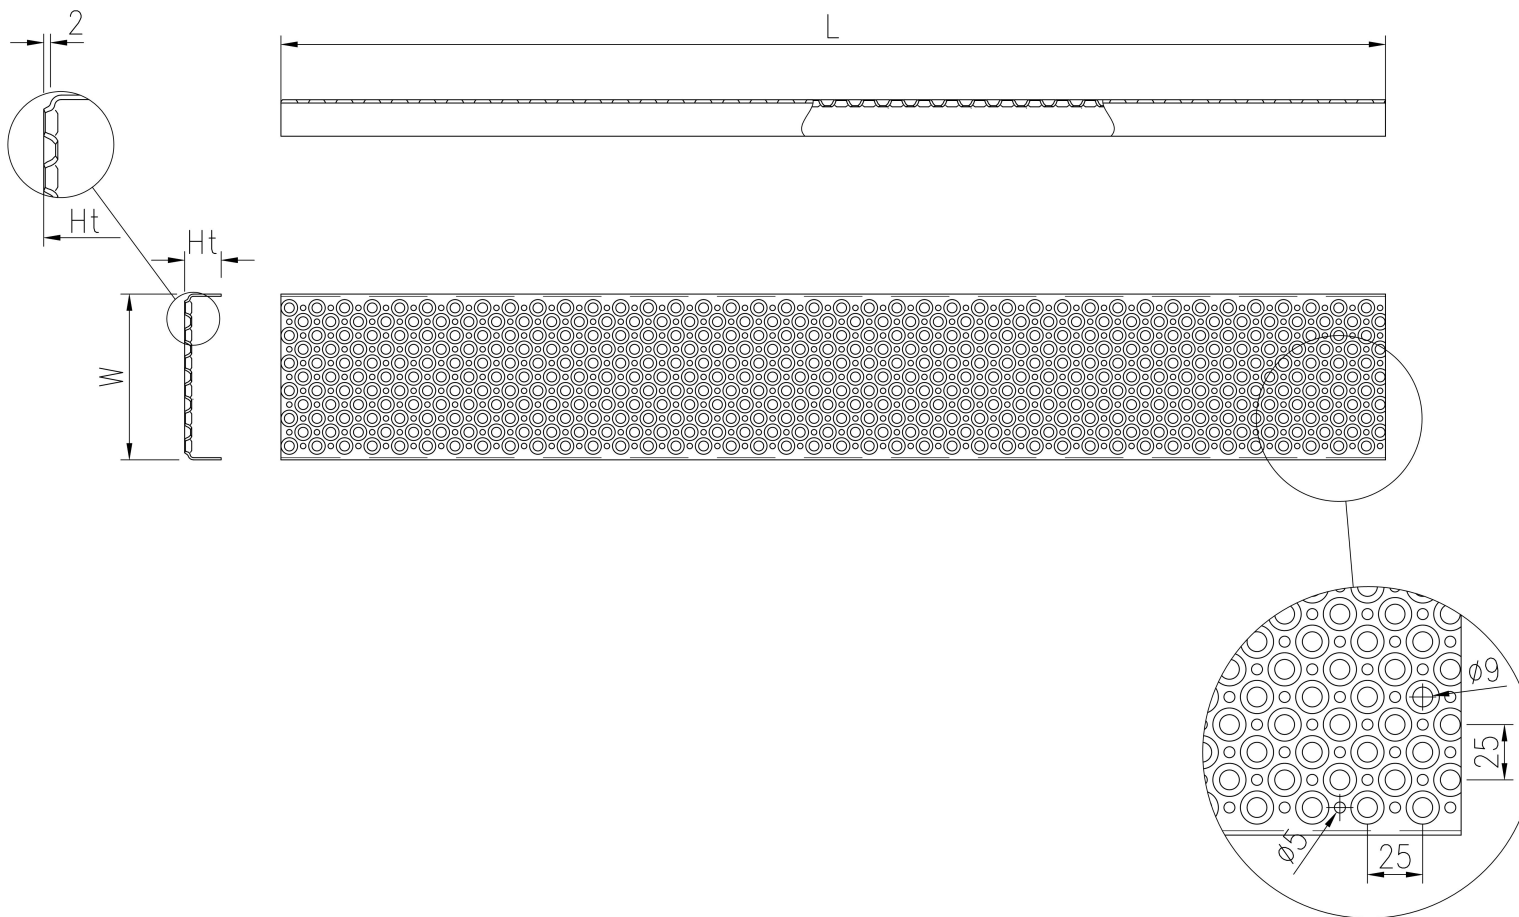

Product name
OPTIMO Plank O2