ARMAGIRT™ Z-GIRT

Product Submittal Sheet

ARMATHERM™
THERMAL BRIDGING SOLUTIONS

ARMAGIRT™ Z-GIRT

Non-metallic Z-girts are an ideal product for furring exterior walls on a new/existing masonry or steel stud backing. The ArmaGirt was developed to reduce heat loss in the building envelope while increasing the effective R-value of the total wall assembly.

PRODUCT DATA:

Material: Fibre-reinforced plastic
Stock Lengths: 9'0" long

10% of a crate "Bundle"

Z-Girt Depth	Lineal Footage	Sticks	Weight (lbs)
1.5"	360	40	200
2"	333	37	222
2.5"	306	34	221
3"	270	30	210
3.5"	171	19	219
4"	162	18	216
6"	126	14	217


Full Crates

Z-Girt Depth	Lineal Footage	Sticks	Weight (lbs)
1.5"	3,600	400	2,100
2"	3,303	367	2,302
2.5"	2,997	333	2,271
3"	2,700	300	2,200
3.5"	1,701	189	2,174
4"	1,602	178	2,236
6"	1,251	139	2,155

Item	Dimensions, mm		
	B	C	S
ArmaGirt™ Z-Girt 1.5"	38.1 ± 0.20	38 ± 0.20	4.0 ± 0.2
ArmaGirt™ Z-Girt 2"	50.8 ± 0.25	38 ± 0.20	4.0 ± 0.2
ArmaGirt™ Z-Girt 2.5"	65.5 ± 0.30	38 ± 0.20	4.0 ± 0.2
ArmaGirt™ Z-Girt 3"	76.2 ± 0.35	38 ± 0.20	4.0 ± 0.2
ArmaGirt™ Z-Girt 3.5"	89 ± 0.4	45.7 ± 0.20	5.0 ± 0.2
ArmaGirt™ Z-Girt 4"	101.6 ± 0.5	51 ± 0.25	5.0 ± 0.2
ArmaGirt™ Z-Girt 6"	154.1 ± 0.6	45.7 ± 0.20	5.0 ± 0.2



ArmaGirt™ Z-Girt with a steel stud backing

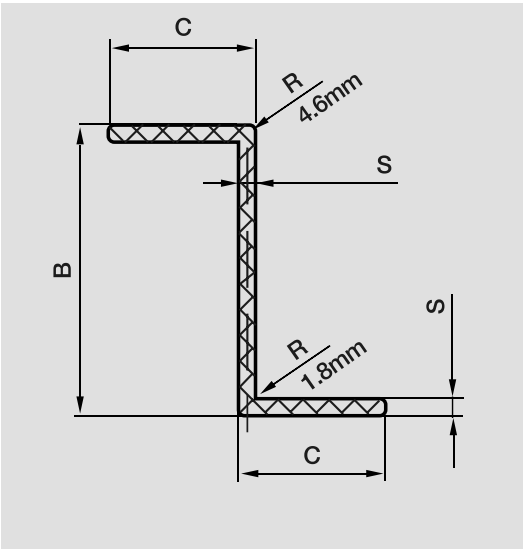

ArmaGirt™ Profile

Armatherm Inc
1 Titleist Drive, Acushnet, MA 02743
844 360 1036
sales@armatherm.com
armatherm.com

ARMAGIRT™ Z-GIRT

Product Submittal Sheet

ARMATHERM™
THERMAL BRIDGING SOLUTIONS

PROJECT INFORMATION

Project Name:

Address:

Girt Depth:

CONTRACTOR INFORMATION

Name:

Contact:

Phone:

Fax:

ARCHITECT INFORMATION

Name:

Contact:

Phone:

Fax:

Armatherm Inc
1 Titleist Drive, Acushnet, MA 02743
844 360 1036
sales@armatherm.com
armatherm.com