


## Specifications

Product name - group	Cavi 60 MWR 200
Exposure rating	Very severe
Cavity - standard sizes accommodated	Up to 200mm maximum
Special cavity widths accommodated	Yes – State actual cavity dimension
Common cavity wall applications	Yes – build in cavicheck as illustrated
Corners and links	Lap and butt options
Product sizes	1.2m x 100mm x 200mm max
Protective sleeving	Yes
Acts as insulator	Yes – acts as thermal & fire barrier – see below
Installed as wall is raised	Yes – compresses for optimum fit in cured masonry
Construction	Traditional (masonry only)
Masonry skin styles	Accommodate most types of finish to either skin
Acoustic insulator	Yes – reduces direct and flanking transmission
Fire rated	Yes Prefix denotes 60 mins (1 hr) fire rating when tested as stated, see: Important
Horizontal and vertical applications	Yes – horizontal and vertical uses
Compatible with other cavity wall elements	Yes – DPC cavitrays and caviweep compatible
Securing ties supplied	N/A. Friction fit + naturally occurring traditional ties
Pack sizes	Packs contain 10 lengths
Weight per pack	10kg
Material	Rock wool insulator within polysleeve
Colour	Red
Building Regulations	Yes regulations can be satisfied
NHBC	Yes requirements can be satisfied
'k' value of insulation used	0.035W/mK
CFC free	Yes + zero ODP
CAD drawing downloads available	Yes

## CAVI 60 TYPE MWR 200

### Fire Resistant Barrier / Closer

- One hour fire rated barrier
- Acoustic barrier
- Friction fit or upstand flap fit
- 100mm to 200mm cavity range

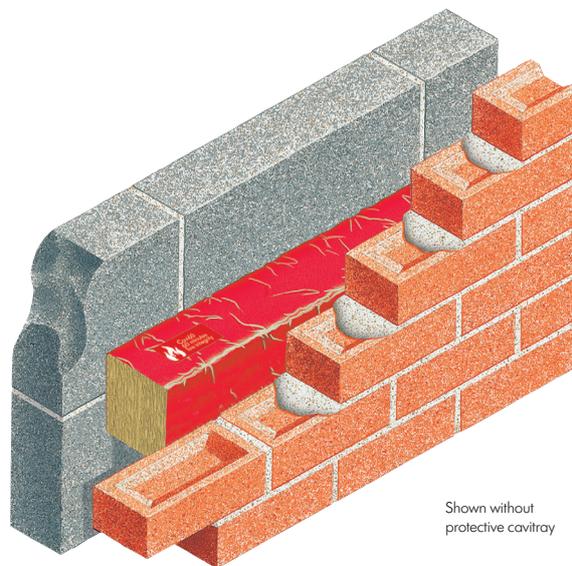

Shown without  
protective cavitrays

### Requirement

To provide 1 hour fire rated acoustic cavity barrier for use in wider cavity walls in intermediate and top of wall locations.